# Smart Laser Sensors E3NC

CSM\_E3NC\_DS\_E\_9\_3

# Ideal for Applications That Cannot Be Handled with Fiber Sensors or Photoelectric Sensors

- The lineup includes E3NC-L Sensors, which are ideal for presence detection, and E3NC-S Sensors, which are ideal for discriminations.
  - E3NC-L Sensors are available in Coaxial Retro-reflective Models, Long-distance Variable-spot Diffuse-reflective Models, and Small-spot Limited-reflective Models.
  - The E3NC-S Sensors include CMOS and provide stable detection of workpieces with different colors and inclined installation.
- Smart Tuning to achieve stable detection with easy setup.
- White on black display characters for high visibility.
- Flexible robot cables are used for the Sensor Heads.

Refer to the *Safety Precautions* on page 14.

# Features

#### **Retro-reflective Models: E3NC-LH03**

- Maximum sensing distance of 8 m.
- Stable detection of many types of workpieces.
- Stable detection of highly transparent films.





For the most recent information on models that have been certified for safety standards, refer to your OMRON website.

CONSULTING DISTRIBUTOR -

POHL Electronic GmbH Eduard-Maurer-Straße 11a · 16761 Hernigsdorf Tel. +49 3302 81893-0 · Fax +49 3302 81893-99 www.pohl-electronic.de · info@pohl-electronic.de

## Diffuse-reflective Models: E3NC-LH02 PAT.P

- Long-distance detection at up to 1.2 m.
- Spot can be adjusted to the workpiece or application.



# CMOS Laser, Reflective Models: E3NC-SH250H/SH250/SH100

Stable detection even for different workpiece colors and materials.
Stable detection for inclined Head installation and different workpiece shapes.

8 m



#### **Amplifier Units**

- Same shape as Fiber Amplifier Units plus easy operation.
- Smart Tuning with one button.



# **Ordering Information**

# Sensor Heads: E3NC-L Compact Laser Sensor Series (Dimensions → page 17)

Sensing method	Appearance	Beam shape	Sensing	distance	Laser class	Cable length	Model
Coaxial Retro- reflective with		Spot		<b>8</b> m *		2 m	E3NC-LH03 2M
MSR function		Spot		) 8 m		5 m	E3NC-LH03 5M
Diffuse-	5	Mariahla arat				2 m	E3NC-LH02 2M
reflective	12	Variable spot	))	1.2 m	Class 1	5 m	E3NC-LH02 5M
Limited-		Creat	70±15			2 m	E3NC-LH01 2M
reflective	I.	Spot	/0±15			5 m	E3NC-LH01 5M

\* These values apply when an E39-R21, E39-R22, E39-RS10, or E39-RS11 Reflector is used. A Reflector is not included. Purchase a Reflector separately to match the intended use of the Sensor.
 Note: Only an E3NC-LA 
 Amplifier Unit can be connected.

# Amplifier Units: E3NC-L Compact Laser Sensor Series (Dimensions → page 19)

Connecting method	Appearance Inputs/outputs		Model		
connecting method	Appearance	inputs/outputs	NPN output	PNP output	
Pre-wired (2 m)	<b>F</b>	2 outputs + 1 input	E3NC-LA21 2M	E3NC-LA51 2M	
Wire-saving Connector	<b>F</b>	1 output + 1 input	E3NC-LA7	E3NC-LA9	
M8 Connector	5	1 output + 1 input	E3NC-LA24	E3NC-LA54	
Connector for Sensor Communications Unit *			E3NC-LA0		

\* A Sensor Communications Unit is required if you want to use the Amplifier Unit on a network.

Note: Only an E3NC-LH Sensor Head can be connected.

# Sensor Heads: E3NC-S Ultra-compact CMOS Laser Sensor Series (Dimensions → page 18)

Sensing method	Appearance	Beam shape	Measurement range	Laser class	Cable length	Model
		Spot	35 to 250 mm	Class 2	2 m	E3NC-SH250H 2M
Distance- settable					2 m	E3NC-SH250 2M
			35 to 100 mm	Class 1	2 m	E3NC-SH100 2M

Note: Only an E3NC-SA Amplifier Unit can be connected.

# Amplifier Units: E3NC-S Ultra-compact CMOS Laser Sensor Series (Dimensions → page 19)

Connecting method	Annooronoo	Appearance Inputs/outputs		odel
Connecting method	Appearance	inputs/outputs	NPN output	PNP output
Pre-wired (2 m)		2 outputs + 1 input	E3NC-SA21 2M	E3NC-SA51 2M
Wire-saving Connector	fr.	1 output + 1 input	E3NC-SA7	E3NC-SA9
M8 Connector	<b>F</b>	1 output + 1 input	E3NC-SA24	E3NC-SA54
Connector for Sensor Communications Unit *	[-		E3NC-SA0	

\* A Sensor Communications Unit is required if you want to use the Amplifier Unit on a network. **Note:** Only an E3NC-SH or E3NC-SH H Sensor Head can be connected.

## Accessories (Sold Separately) Sensor Head Accessories

Reflectors (Required for Retro-reflective Sensors) (Dimensions → page 21) A Reflector is not provided with the Sensor Head. It must be ordered separately.

Applicable Sensor Head	Appearance	Model	Quantity
		E39-R21	
E3NC-LH03		E39-R22	1
		E39-RS10	-
		E39-RS11	

Note: Refer to the Safety Precautions on page 14 for how to attach the reflector.

#### Sensor Head Mounting Brackets (Dimensions → page 22) A Mounting Bracket is not provided with the Sensor Head. It must be ordered separately as required.

# Lens Attachments for Sensor Heads (Dimensions → page 21) A Lens Attachment is not provided with the Sensor Head. It must

Applicable Sensor Head	Appearance	Model	Quantity
E3NC-LH03		E39-P51	
E3NC-LH02		E39-P52	1

Note: You can combine the Lens Attachment with an applicable Sensor Head to create a line beam.

Applicable Sensor Head	Appearance	Model	Quantity	Contents
E3NC-LH03		E39-L190		
E3NC-LH02		E39-L185	-	
E3NC-LH01		E39-L186	1	Mounting Bracket: 1 Nut plate: 1 Phillips screws (M3×18): 2
E3NC-SH250H E3NC-SH250		E39-L187	-	
E3NC-SH100		E39-L188		

## **Amplifier Unit Accessories**

Wire-saving Connectors (Required for models for Wire-saving Connectors.) (Dimensions → page 26) Connectors are not provided with the Amplifier Unit and must be ordered separately. \*Protective stickers are provided.

Туре	Appearance	Cable length	No. of conductors	Model
Master Connector	8	2 m	4	E3X-CN21
Slave Connector	-	2 111	2	E3X-CN22

# Sensor I/O Connectors (Required for models for M8 Connectors.) (Dimensions $\rightarrow$ page 26) Connectors are not provided with the Amplifier Unit and must be ordered separately.

Size	Cable	Арре	arance	Cable	e type	Model
		Straight		2 m		XS3F-M421-402-A
M8	Standard cable	0	C When	5 m	4-wire	XS3F-M421-405-A
IVIO	Stanuaru cable	L-shaped		2 m	4-wire	XS3F-M422-402-A
				5 m		XS3F-M422-405-A

Note: For details, refer to XS3 which can be accessed from your OMRON website.

#### Amplifier Unit Mounting Bracket (Dimensions → page 27) A Mounting Bracket is not provided with the Amplifier Unit. It must be ordered separately as required.

Appearance	Model	Quantity
Contraction of the second seco	E39-L143	1

Note: For details, refer to Mounting Brackets on E39-L/E39-S/E39-R which can be accessed from your OMRON website.

#### DIN Track (Dimensions → page 27)

A DIN Track is not provided with the Amplifier Unit. It must be ordered separately as required.

Appearance	Туре	Model	Quantity
	Shallow type, total length: 1 m	PFP-100N	
	Shallow type, total length: 0.5m	PFP-50N	1
	Deep type, total length: 1 m	PFP-100N2	

#### End Plate (Dimensions → page 27)

Two End Plates are provided with the Sensor Communications Unit. End Plates are not provided with the Amplifier Unit. They must be ordered separately as required.

Appearance	Model	Quantity
6	PFP-M	1

#### Cover

Attach these Covers to Amplifier Units. Order a Cover when required, e.g., if you lose the covers.

Appearance	Model	Quantity
S	E39-G24 FOR E3NC-LA	1
	E39-G21 FOR E3NC-SA	

# Related Products

**Sensor Communications Units** 

Туре	Appearance	Model
Sensor Communications Unit for EtherCAT	<b>A</b>	E3NW-ECT
Sensor Communications Unit for CompoNet	- Contraction	E3NW-CRT
Sensor Communications Unit for CC-Link		E3NW-CCL
Distributed Sensor Unit *	and the second s	E3NW-DS

Refer to your OMRON website for details.

\* The Distributed Sensor Unit can be connected to any of the Sensor Communications Units.

EtherCAT<sup>®</sup> is a registered trademark and patented technology, licensed by Beckhoff Automation GmbH, Germany.

CompoNet is a registered trademark of the ODVA. CC-Link is a registered trademark of Mitsubishi Electric Corporation. The trademark is managed by the CC-Link Partner Association.

# **Ratings and Specifications**

# **Compact Laser Sensors: E3NC-L**

#### **Sensor Heads**

	Sensir	ng method		ro-reflective R function	Diffuse-	reflective	Limited- reflective		
Item		Model	E3NC-LH03	E3NC-LH03+ E39-P51	E3NC-LH02	E3NC-LH02+ E39-P52	E3NC-LH01		
Light source (wavelength)*1				tor laser diode (660 n N Class 1, and FDA (		ge output: 315 μW)			
	Giga-power (GIGA)	mode	8 m		1,200 mm	1,000 mm			
Sensing	Standard mo	ode (Stnd)	6 m	0.5 m	750 mm	600 mm	70±15 mm		
distance*2	High-speed	mode (HS)	3.5 m	0.5 11	250 mm	200 mm	70±15 mm		
	Super-high-s mode (SHS)	speed	2 m		200 mm	150 mm	-		
Beam shape			Spot	Line	Spot	Line	Spot		
Beam size*3			Approx. 2 mm dia. at 1 m	Line length: Approx. 25 mm at 250 mm Line length: Approx. 50 mm at 500 mm	Approx. 0.8 mm dia. at 300 mm	Line length: Approx. 45 mm at 500 mm Line length: Approx. 100 mm at 1,000 mm	Approx. 0.1 mm dia. at 70 mm		
Differential d	istance*4		-		10% of sensing dist	tance max.			
Indicators			OUT indicator (oran	ge) and STABILITY i	ndicator (green)				
Ambient illur	nination (Rece	eiver side)	Incandescent lamp: Sunlight: 20,000 lx i						
Ambient tem	perature rang	e	Operating: -10 to 55°C; Storage: -25 to 70°C (with no icing or condensation)						
Ambient hun	nidity range		Operating and storage: 35% to 85% (with no condensation)						
Altitude			2,000 m max.						
Installation e	nvironment		Pollution degree 3 (as per IEC 60947-1)						
Insulation rea	sistance		20 MΩ min. (at 500 VDC)						
Dielectric str	ength		1,000 VAC at 50/60 Hz for 1 min						
Vibration res	istance (destr	uction)	10 to 55 Hz with a 1.5-mm double amplitude or 100 m/s <sup>2</sup> for 2 hours each in X, Y, and Z directions						
Shock resist	ance (destruc	tion)	500 m/s <sup>2</sup> for 3 times each in X, Y, and Z directions						
Degree of pro	otection		IEC IP67*5 IEC IP65 (E3NC-LH02: Applies only when adjuster is locked.)*5				n adjuster is		
Connecting r	nethod		Pre-wired connector (standard length: 2 m)						
		Case	Polybutylene terephthalate (PBT)						
	Sensor Head	Lens	Methacrylic resin (P	MMA)					
Materials		Cable	Vinyl chloride (PVC	)					
	Lens	Case		ABS		ABS			
	Attachment	Lens		Methacrylic resin (PMMA)		Methacrylic resin (PMMA)			
	Models with	2-m cable	Approx. 120 g/appro	ox. 70 g	Approx. 115 g/appr	ox. 65 g			
Weight (packed state/Sensor	Models with	5-m cable	Approx. 180 g/appro	ox. 130 g	Approx. 175 g/appr	ox. 125 g			
Head only)	Lens Attachn	nent		Approx. 25 g/ approx. 2 g		Approx. 25 g/ approx. 2 g			
Accessories			Instruction Manual						

These Sensors are classified as Class 1 laser devices under IEC 60825-1 and the regulations of Laser Notice No. 50 for FDA certification. CDRH (Center for De-\*1. vices and Radiological Health) registration has been completed.

E3NC-LH01, E3NC-LH02 (Accession Number: 1220690) E3NC-LH03 (Accession Number: 1320739)

\*2. The values were measured using the OMRON standard sensing object (white paper) for the E3NC-LH01, E3NC-LH02, and E3NC-LH02 + E39-P52. The values for the E3NC-LH03, and E3NC-LH03 + E39-P51 apply when an E39-R21, E39-R22, E39-RS10, or E39-RS11 Reflector is used. Other Reflectors are not recommended. Defined at the  $1/e^2$  (13.5%) of the central intensity at the measurement distance.

\*3.

Measurement may be influenced if there is light leakage outside the defined region and the surroundings of the target object have a high reflectance in comparison to the target object.

\*4. Measured at the rated sensing distance.

\*5. The E39-P5 contains a packing to prevent entry of foreign matter. The degree of protection between the E3NC-LH and E39-P5 is not specified.

#### **Amplifier Units**

		Туре		Standard models		Model for Sensor Communications Unit	
		NPN output	E3NC-LA21	E3NC-LA7	E3NC-LA24		
		PNP output	E3NC-LA51	E3NC-LA9	E3NC-LA54	E3NC-LA0	
Item	C	onnecting method	Pre-wired	Wire-saving Connector	M8 Connector	Connector for Sensor Communications Unit	
nputs/	Outputs		2 outputs	1 output		+4	
outputs	External inputs		1 input	-		*1	
Power supply	y voltage *2		10 to 30 VDC, including 1	0% ripple (p-p)		Supplied from the connector through the Sensor Communications Unit	
Power consu	umption *3		Eco ON: 1,320 mW max.	of 24 VDC nax. (Current consumption: ( (Current consumption: 55 m. (Current consumption: 60 m/	A max.)		
				e: 30 VDC max., open-collect to 3 Amplifier Units: 100 mA ax.			
Control outp	outs*4		Residual voltage: At load current of less At load current of 10 to	than 10 mA: 1 V max.			
			OFF current: 0.1 mA max.				
External inpu	uts		Refer to *5.				
Indicators			7-segment displays (Sub digital display: green, Main digital display: white) Display direction: Switchable between normal and reversed. OUT indicator (orange), L/D indicator (orange), ST indicator (blue), DPC indicator (green), and OUT selection indicator (orange, only on models with 2 outputs)				
Protection ci	ircuits		Power supply reverse pol output reverse polarity pro	Power supply reverse polari protection and output short- circuit protection			
	Super-high-speed	mode (SHS)*6	Operate or reset: 80 µs				
Response	High-speed mode	(HS)	Operate or reset: 250 µs				
time	Standard mode (St	tnd)	Operate or reset: 1 ms				
	Giga-power mode	(GIGA)	Operate or reset: 16 ms				
Sensitivity ad	djustment			ing, full auto tuning, position to +99%)), or manual adjust		vity tuning, power tuning, or	
Maximum co	onnectable Units		30			With E3NW-ECT: 30 units * With E3NW-CRT: 16 units With E3NW-CCL: 16 units	
No. of Units	Super-high-speed	mode (SHS)*6	0				
for mutual	High-speed mode	(HS)	2				
interference prevention	Standard mode (St	tnd)	2				
	Giga-power mode	( )	4				
	Dynamic power co	ontrol (DPC)	Provided				
	Timer			d, OFF-delay, ON-delay, one		-delay timer: 1 to 9,999 ms	
	Zero reset		•	isplayed. (Threshold value is	,		
	Resetting settings	*8		actory defaults) or user reset			
-	Eco mode*9			isplay lit), ECO ON (digital d	isplay not lit), and ECO L	O (digital display dimmed).	
	Bank switching		Select from banks 1 to 4.				
Functions			Select from ON or OFF.				
Functions	Power tuning		Select from Normal Detection Mode or Area Detection Mode.				
Functions	Power tuning Output 1		Select from Normal Detec				
Functions	-		Select from Normal Detection Select from normal detection mode, alarm output mode, or error output mode.				
Functions	Output 1		Select from normal detection mode, alarm output mode, or error output mode.	g, power tuning, laser OFF, zero	o reset, or bank switching.	Select from normal detection mode, alarm output mode, of error output mode.	

Two sensor outputs are allocated in the programmable logic controller PLC hor table.
 PLC operation via Communications Unit enables reading detected values and changing settings.
 \*2. Applicable Sensor Head is the series of E3NC-LH□ (Input/Output 10-30V DC Class 2)
 \*3. At Power Supply Voltage of 10 to 30 VDC. Normal mode: 1,650 mW max. (Current consumption: 55 mA max. at 30 VDC, 115 mA max. at 10 VDC) Eco ON: 1,410 mW max. (Current consumption: 47 mA max. at 30 VDC, 95 mA max. at 10 VDC) Eco LO: 1,530 mW max. (Current consumption: 51 mA max. at 30 VDC, 105 mA max. at 10 VDC)
 \*1. The table for bulk the untertier for matching the formation of the max at 10 VDC)

\*4. The total for both outputs of a model with 2 outputs is 100 mA max. (Residual voltage: Load current of less than 10 mA: 1 V max., Load current of 10 to 100 mA: 2 V max.). \*5. The following details apply to the input.

	Contact input (relay or switch)	Non-contact input (transistor)	Input time*5-1
NPN	ON: Shorted to 0 V (Sourcing current: 1 mA max.). OFF: Open or shorted to Vcc.	ON: 1.5 V max. (Sourcing current: 1 mA max.) OFF: Vcc – 1.5 V to Vcc (Leakage current: 0.1 mA max.)	ON: 9 ms min.
PNP	ON: Shorted to Vcc (Sinking current: 3 mA max.). OFF: Open or shorted to 0 V.	ON: Vcc – 1.5 V to Vcc (Sinking current: 3 mA max.) OFF: 1.5 V max. (Leakage current: 0.1 mA max.)	OFF: 20 ms min.

\*5-1.Input time is 25 ms (ON)/(OFF) only when (in tUnE) or (in PtUn) input is selected.

\*6. The mutual interference prevention function is disabled if the detection mode is set to super-high-speed mode.
\*7. When connected to an OMRON NJ-series Controller.
\*8. The bank is not reset by the user reset function or saved by the user save function.
\*9. Eco LO is supported for Amplifier Units manufactured in July 2014 or later.

	Туре		Standard models		Model for Sensor Communications Unit		
	NPN output	E3NC-LA21 E3NC-LA7		E3NC-LA24	E3NC-LA0		
	PNP output	E3NC-LA51	E3NC-LA9	E3NC-LA54	E3NC-LAU		
Item	Connecting method	Pre-wired	Wire-saving Connector	M8 Connector	Connector for Sensor Communications Unit		
Ambient temperature ra	nge*	Operating: Groups of 1 or 2 Amplifier Units: -25 to 55°C, Groups of 3 to 10 Amplifier Units: -25 to 50°C, Groups of 11 to 16 Amplifier Units: -25 to 45°C, Groups of 17 to 30 Amplifier Units: -25 to 40°C Storage: -30 to 70°C (with no icing or condensation)			Operating: Groups of 1 or 2 Amplifier Units: 0 to 55°C, Groups of 3 to 10 Amplifier Units: 0 to 50°C, Groups of 11 to 16 Amplifier Units: 0 to 45°C, Groups of 17 to 30 Amplifier Units: 0 to 40°C, Storage: -30 to 70°C (with no icing or condensation)		
Ambient humidity range	•	Operating and storage: 35% to 85% (with no condensation)					
Altitude		2,000 m max.					
Installation environmen	t	Pollution degree 3 (as per IE	EC 60947-1)				
Insulation resistance		20 MΩ (at 500 VDC)					
Dielectric strength		1,000 VAC at 50/60 Hz for 1 min					
Vibration resistance (de	struction)	10 to 55 Hz with a 1.5-mm double amplitude for 2 hours each in X, Y, and Z directions					
Shock resistance (destruction)		500 m/s <sup>2</sup> for 3 times each in	150m/s <sup>2</sup> for 3 times each in X, Y, and Z directions				
Weight (packed state/Ar	nplifier Unit only)	Approx. 115 g/approx. 75 g	Approx. 60 g/approx. 20 g	Approx. 65 g/approx. 25 g	1		
	Case	Polycarbonate (PC)		·			
Materials	Cover	Polycarbonate (PC)					
	Cable	Vinyl chloride (PVC)					
Accessories	+	Instruction Manual					

\* When the number of connected units is 11 or more, the ambient temperature is less than 50°C.

# Accessories

#### Reflectors

Item Model	E39-R21	E39-R22	E39-RS10	E39-RS11	
Ambient temperature	Operating: -10 to 55°C; Storage: -25 to 70°C (with no icing or condensation)				
Ambient humidity	Operating/storage: 35% t	o 85% (with no condensat	ion)		
Vibration resistance (destruction)	10 to 55 Hz with a 1.5-mr	m double amplitude or 100	m/s <sup>2</sup> for 2 hours each in X	K, Y, and Z directions	
Shock resistance (destruction)	500 m/s <sup>2</sup> 3 times each in	X, Y, and Z directions			
Degree of protection	IEC IP67 (E39-R21 and E	E39-R22 only)			
Materials	Reflective surface: Metha Back surface: Polybutyle		Methacrylic resin (PMMA)		
Weight (packed state/Reflector only)	Approx. 30 g/approx. 5 g	Approx. 35 g/approx. 10 g	Approx. 26 g/approx. 1 g	Approx. 30 g/approx. 5 g	
Accessories	Instruction manual				

# Ultra-compact CMOS Laser Sensor: E3NC-S

#### **Sensor Heads**

Sensing method		Distance-settable				
Item	Model	E3NC-SH250H	E3NC-SH250	E3NC-SH100		
Light source (wavelength)*1		Visible semiconductor laser diode (660 nm), 1 mW (average output: 220 μW) (JIS Class 2, IEC/EN Class 2, and FDA Class 2) Visible semiconductor laser diode (660 nm), 0.5 mW (a output: 100 μW) (JIS Class 1, IEC/EN Class 1, and FD				
Measureme	ent range	35 to 250 mm (display value: 350	to 2,500)	35 to 100 mm (display value: 350 to 1,000)		
Standard de	etected level difference	35 to 180mm: 9 mm 180 to 250 mm: 25 mm		35 to 50 mm: 1.5 mm 50 to 100 mm: 3 mm		
Beam size*;	3	Approx. 1 mm dia. at 250 mm		Approx. 0.5 mm dia. at 100 mm		
Indicators		OUT indicator (orange), STABILI	TY indicator (green), and ST indica	ator (blue)		
Ambient illu (Receiver s		Incandescent lamp: 4,000 lx max., Sunlight: 8,000 lx max.	Incandescent lamp: 2,000 lx max., Sunlight: 4,000 lx max.	Incandescent lamp: 4,000 lx max., Sunlight: 8,000 lx max.		
Ambient ter	nperature range	Operating: -10 to 50°C; Storage: -25 to 70°C (with no icing or condensation)				
Ambient hu	midity range	Operating and storage: 35% to 85% (with no condensation)				
Altitude		2,000 m max.				
Installation	environment	Pollution degree 3 (as per IEC 60947-1)				
Insulation r	esistance	20 MΩ min. (at 500 VDC)				
Dielectric s	trength	1,000 VAC at 50/60 Hz for 1 min				
Vibration re	esistance (destruction)	10 to 55 Hz with a 1.5-mm double amplitude for 2 hours each in X, Y, and Z directions				
Shock resis	stance (destruction)	500 m/s <sup>2</sup> 3 times each in X, Y, and Z directions				
Degree of p	rotection	IEC IP67				
Connecting	method	Pre-wired connector (Standard cable length: 2 m)				
	Case	Polybutylene terephthalate (PBT)				
Materials Lens		Methacrylic resin (PMMA)				
	Cable	Vinyl chloride (PVC)				
Weight (pac only)	ked state/Sensor Head	Approx. 125 g/approx. 75 g				
Accessorie	s	Instruction Manual, laser warning	label (E3NC-SH250H only)			

Note: Incorrect detection may occur outside the measurement range if the object has a high reflection factor.

\*1. These Sensors are classified as Class 1 laser devices under IEC 60825-1 and the regulations of Laser Notice No. 50 for FDA certification. CDRH (Center for Devices and Radiological Health) registration has been completed. (Accession Number: 1220691)

\*2. The values were measured at the center of the sensing distance using OMRON's standard sensing object (white ceramic).
\*3. Beam size: Defined at the 1/e<sup>2</sup> (13.5 %) of the central intensity at the measurement center distance. Measurement may be influenced if there is light leakage outside the defined region and the surroundings of the target object have a high reflectance in comparison to the target object.

Also, when detecting a workpiece that is smaller than the beam size, a correct value may not be obtained.

#### **Amplifier Units**

		Туре		Standard models		Model for Sensor Communications Unit	
		NPN output	E3NC-SA21	E3NC-SA7	E3NC-SA24		
		PNP output	E3NC-SA51         E3NC-SA9         E3NC-SA54           Pre-wired         Wire-saving Connector         M8 Connector		E3NC-SA54	E3NC-SA0	
ltem	Co	onnecting method			M8 Connector	Connector for Sensor Communications Unit	
Inputs/	Outputs		2 outputs	1 output		*1	
outputs	External inputs		1 input	1		1	
Power supply	y voltage *2		10 to 30 VDC, including 1	0% ripple (p-p)		Supplied from the connector through the Sensor Communications Unit	
Power consu	mption *3		Eco ON: 1,680 mW max	of 24 VDC W max. (Current consumption x. (Current consumption: 70 n x. (Current consumption: 75 n	nA max.)		
				e: 30 VDC max., open-collec to 3 Amplifier Units: 100 mA ax.			
Control outp	uts *4		Residual voltage: At load current of less At load current of 10 to	than 10 mA: 1 V max.			
			OFF current: 0.1 mA max.				
External inpu	Its		Refer to *5.				
Indicators			Display direction: Switcha	digital display: green, Main di ble between normal and reve D indicator (orange), ST indic models with 2 outputs)	ersed.	or (green), and OUT selectior	
Protection ci	rcuits		Power supply reverse pol output reverse polarity pre	Power supply reverse polarity protection and output short-circuit protection			
	Super-high-speed	mode (SHS) *6	Operate or reset: 1.5 ms				
Response	High-speed mode	(HS)	Operate or reset: 5 ms				
time	Standard mode (S	tnd)	Operate or reset: 10 ms				
	Giga-power mode	(GIGA)	Operate or reset: 50 ms				
Sensitivity ac	djustment		Smart Tuning (2-point tuning, full auto tu tuning, or area tuning with	uning, 1-point tuning, tuning w nout workpiece), or manual ac	vithout workpiece, 2-poin djustment	t area tuning, 1-point area	
Maximum co	nnectable Units		30			With E3NW-ECT: 30 units *7 With E3NW-CRT: 16 units With E3NW-CCL: 16 units	
	Super-high-speed	mode (SHS) *6	0				
No. of Units for mutual	High-speed mode	(HS)	2				
interference	Standard mode (S	tnd)	2				
prevention	Giga-power mode	(GIGA)	2				
	Timer		Select from timer disabled	d, OFF-delay, ON-delay, one-	shot, or ON-delay + OFF	-delay timer: 1 to 9,999 ms	
	Zero reset		Negative values can be displayed. (Threshold value is shifted.)				
	Resetting settings	*8	Select from initial reset (factory defaults) or user reset (saved settings).				
	Eco mode *9		Select from OFF (digital d	lisplay lit), ECO ON (digital di	splay not lit), and ECO L	O (digital display dimmed).	
	Bank switching		Select from banks 1 to 4.				
	Output 1		Select from Normal detec	tion mode, Area detection mo	ode, or hold mode.		
Functions	Output 2		Select from Normal detection mode or Error output mode.			Select from Normal detection mode or Error output mode.	
	External input		Select from input OFF, tu	ning, laser OFF, zero reset, o	r bank switching.		
	Keep function *10		Select from ON or OFF.			•	
	Background supp		Select from ON or OFF.				
	Hysteresis width		Select from standard setting or user setting.				

\*2. Applicable Sensor Head is the series of E3NC-SH□ (Iput/Output 10-30V DC Class 2).
\*3. At Power Supply Voltage of 10 to 30 VDC. Normal mode: 2,250 mW max. (Current consumption: 75 mA max. at 30 VDC, 145 mA max. at 10 VDC) Eco ON: 2,010 mW max. (Current consumption: 67 mA max. at 30 VDC, 125 mA max. at 10 VDC) Eco LO: 2,130 mW max. (Current consumption: 71 mA max. at 30 VDC, 135 mA max. at 10 VDC)

\*4. The total for both outputs of a model with 2 outputs is 100 mA max. (Residual voltage: Load current of less than 10 mA: 1 V max., Load current of 10 to 100 mA: 2 V max.). \*5. The following details apply to the input.

	Contact input (relay or switch)	Non-contact input (transistor)	Input time*5-1
NPN	ON: Shorted to 0 V (Sourcing current: 1 mA max.). OFF: Open or shorted to Vcc.	ON: 1.5 V max. (Sourcing current: 1 mA max.) OFF: Vcc – 1.5 V to Vcc (Leakage current: 0.1 mA max.)	ON: 9 ms min.
PNP	ON: Shorted to Vcc (Sinking current: 3 mA max.). OFF: Open or shorted to 0 V.	ON: Vcc – 1.5 V to Vcc (Sinking current: 3 mA max.) OFF: 1.5 V max. (Leakage current: 0.1 mA max.)	OFF: 20 ms min.

\*5-1.Input time is 25 ms (ON)/(OFF) only when (in tUnE) input is selected.

The mutual interference prevention function is disabled if the detection mode is set to super-high-speed mode.

\*6. \*7. When connected to an OMRON NJ-series Controller.

\*8. The bank is not reset by the user reset function or saved by the user save function.
\*9. Eco LO is supported for Amplifier Units manufactured in August 2014 or later.
\*10. The output for a measurement error is set. ON: The value of the output from before the measurement error is retained. OFF: The output is turned OFF when a measurement error occurs.

\*11. Only the sensing object is detected when tuning.

	Туре		Standard models		Model for Sensor Communications Unit		
	NPN output	E3NC-SA21	E3NC-SA7	E3NC-SA24	E3NC-SA0		
	PNP output	E3NC-SA51	E3NC-SA9	E3NC-SA54	ESNO-SAU		
Item	Connecting method	Pre-wired	Wire-saving Connector	M8 Connector	Connector for Sensor Communications Unit		
Ambient temperature ra	nge*	Operating: Groups of 1 or 2 Amplifier Ur Groups of 3 to 10 Amplifier U Groups of 11 to 16 Amplifier Groups of 17 to 30 Amplifier Storage: -30 to 70°C (with 1	Operating: Groups of 1 or 2 Amplifier Units: 0 to $55^{\circ}$ C, Groups of 3 to 10 Amplifier Units: 0 to $50^{\circ}$ C, Groups of 11 to 16 Amplifier Units: 0 to $45^{\circ}$ C, Groups of 17 to 30 Amplifier Units: 0 to $40^{\circ}$ C Storage: $-30$ to $70^{\circ}$ C (with no icing or condensation)				
Ambient humidity range	1	Operating and storage: 35% to 85% (with no condensation)					
Insulation resistance		20 MΩ (at 500 VDC)					
Altitude		2,000 m max.					
Installation environment	t	Pollution degree 3 (as per IE	C 60947-1)				
Dielectric strength		1,000 VAC at 50/60 Hz for 1 min					
Vibration resistance (de	struction)	10 to 55 Hz with a 1.5-mm do	ouble amplitude for 2 hours ea	ach in X, Y, and Z directions			
Shock resistance (destr	uction)	500 m/s <sup>2</sup> for 3 times each in	150 m/s <sup>2</sup> for 3 times each in X, Y, and Z directions				
Weight (packed state/An	nplifier Unit only)	Approx. 115 g/approx. 75 g	Approx. 60 g/approx. 20 g	Approx. 65 g/approx. 25 g			
	Case	Polycarbonate (PC)	·				
Materials	Cover	Polycarbonate (PC)					
	Cable	Vinyl chloride (PVC)					
Accessories		Instruction Manual					


\* When the number of connected units is 11 or more, the ambient temperature is less than 50°C.

Distance (mm)


# **Engineering Data (Reference Value)**

Distance (m)


## **Beam Diameter Vs. Distance**

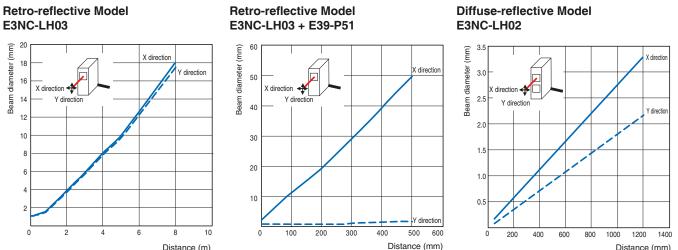


#### **Diffuse-reflective Model** E3NC-LH02 + E39-P52




#### Limited-reflective Model E3NC-LH01



#### **Distance-settable Model** E3NC-SH250/SH250H



#### **Distance-settable Model** E3NC-SH100



# I/O Circuit Diagrams

NPN Output				
Model	Operation mode	Timing chart	L/D indicator	Output circuit
E3NC-LA21 E3NC-SA21	Light-ON	ch1/ Incident light ch2 No incident light (orange) Not lit Output ON transistor OFF Load Operate (e.g., relay) Reset (Between brown and black (orange) leads)	L lit.	Display 00T1 indicator 00T2 indicator (orange) (
	Dark-ON	ch1/ Incident light ch2 No incident light (orange) Not lit Output ON transistor OFF Load Operate (e.g., relay) Reset (Between brown and black (orange) leads)	D lit.	30 VDC
E3NC-LA7 E3NC-LA24 E3NC-SA7 E3NC-SA24	Light-ON	Incident light No incident light OUT indicator Lit (orange) Not lit Output ON transistor OFF Load Operate (e.g., relay) Reset (Between brown and black leads)	L lit.	Display OUT indicator (orange) Black Load Photoelectic enter main Black Load Control output 30 VDC
	Dark-ON	Incident light No incident light OUT indicator Lit Output Output transistor (e.g., relay) Reset (Between brown and black leads)	D lit.	Note: 1, 2, 3 and 4 are pin terminals of M8 Connector Type.

# PNP Output


Model	Operation mode	Timing chart	L/D indicator	Output circuit
E3NC-LA51 E3NC-SA51	Light-ON	ch1/ Incident light ch2 No incident light (orange) Not lit Output ON transistor OFF Load Operate (e.g., relay) Reset (Between blue and black (orange) leads)	L lit.	Display OUT1 indicator (orange) (orange) Ploteledric (control output Proteledric (control output control output control output control output Black ch1 - U Orange Blue Load
	Dark-ON	ch1/ Incident light ch2 No incident light (orange) Not lit Output ON transistor OFF Load Operate (e.g., relay) Reset (Between blue and black (orange) leads)	D lit.	
E3NC-LA9 E3NC-LA54 E3NC-SA9 E3NC-SA54	Light-ON	Incident light No incident light OUT indicator Lit (orange) Not lit Output ON transistor OFF Load Operate (e.g., relay) Reset (Between blue and black leads)	L lit.	Display OUT indicator (orange) Piddeletic sets main citation Black Blue
	Dark-ON	Incident light No incident light (orange) Not lit Output ON transistor OFF Load Operate (e.g., relay) Reset (Between blue and black leads)	D lit.	

# Nomenclature

#### Compact Laser Sensors E3NC-LA21/LA51/LA0


#### [L/D Indicator] [DPC Indicator] [AL/D Button] Indicates the setting status: Used to switch between Light-ON (L) and Dark-ON (D). Turns ON when Dynamic Light-ON (L) or Dark-ON (D). Power Control is effective. [OUT1 Indicator/ OUT2 Indicator] Turns ON when OUT1 or OUT2 is ON [ST Indicator] Turns ON when Smart Tuning is in progress. <u>9999</u> 8 [ 🚱 Tune Button] Executes Smart Tuning. Threshold Level Incident Level [ MODE Button] Green digital display White digital Used to switch between Detection display Mode and Setting Mode, [OUT1 Selection Indicator/ OUT2 Selection Indicator] and used to switch between OUT1 and OUT2. [+-UP/DOWN Button] Used to fine-tune the threshold or change The indicator for the selected output channel is lit. set values.

#### E3NC-LA7/LA9/LA24/LA54

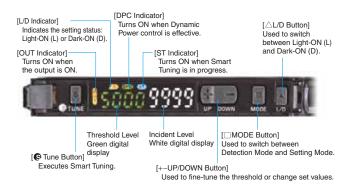


# Ultra-compact CMOS Laser Sensors

#### E3NC-SA21/SA51/SA0



#### E3NC-SA7/SA9/SA24/SA54

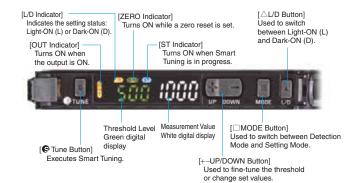

# **Safety Precautions**

## To ensure safe operation, be sure to read and follow the Instruction Manual provided with the Sensor.

## Indication and Meaning for Safe Use

	Indicates a potentially hazardous situation which, if not avoided, will re in minor or moderate injury, or may result in serious injury or death. Additionally there may be significant property damage.	
Precautions for Safe Use	Supplementary comments on what to do or avoid doing, to use the product safely.	
Precautions for Correct Use	Supplementary comments on what to do or avoid doing, to prevent failure to operate, malfunction or undesirable effect on product performance.	

# **Sensor Heads**

#### Laser Safety

Various safety standards regarding laser devices are stipulated in Japan and abroad. When this Sensor Head is used in Japan and when it is assembled in Japan but exported to a foreign country, the safety standards are classified into three cases.

#### 1. When Using the Sensor Head in Japan

JIS C6802 stipulates the safety measures that must be observed by the user for each type of laser equipment.

E3NC-LH Sensor Heads: Class 1 E3NC-SH Sensor Heads: Class 1 E3NC-SH H Sensor Heads: Class 2

# <u> WARNING</u>

Do not expose your eyes to the laser beam either directly or indirectly (i.e., after reflection from a mirror or shiny surface). The laser beam has a high power density and exposure may result in loss of sight.



#### Attention

Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

Do not disassemble the Sensor Head. Doing so may cause the laser beam to leak, resulting in a risk of visual impairment.



- The following laser warning label and laser description labels are attached to the sides of the Sensor Heads.
- E3NC-LH03 Description Label Certification Label

E3NC-LH01 /E3NC-LH02



E3NC-SH

E3NC-SH



Description Label

ASER

Description Labe

Laser Warning Label



#### 2. Using in the USA

When using devices in which the Sensor Head is installed in the USA, the devices are subject to FDA (Food and Drug Administration) laser regulations of the USA.

#### E3NC-LH03:

These Sensor Heads are classified as Class 1 laser devices under IEC/EN 60825-1 and the regulations of Laser Notice No. 50 for this certification. CDRH (Center for Devices and Radiological Health) registration has been completed. (Accession Number: 1320739)

#### E3NC-LH01, E3NC-LH02:

These Sensor Heads are classified as Class 1 laser devices under IEC/EN 60825-1 and the regulations of Laser Notice No. 50 for this certification. CDRH (Center for Devices and Radiological Health) registration has been completed. (Accession Number: 1220690)

#### E3NC-SH , E3NC-SH H:

These Sensor Heads are classified as Class 1 or Class 2 laser devices under IEC/EN 60825-1 and the regulations of Laser Notice No. 50 for this certification. CDRH (Center for Devices and Radiological Health) registration has been completed. (Accession Number: 1220691)

 For countries other than Japan Replace the warning label with the corresponding English label (supplied with SH□□H).



## 3. Using in Europe

E3NC-LH , E3NC-SH :: These Sensor Heads are classified in Class 1 under EN 60825-1. E3NC-SH H:

These Sensor Heads are classified in Class 2 under EN 60825-1.

14

#### **Precautions for Safe Use**

The following precautions must be observed to ensure safe operation of the Sensor Head.

- **1.** Installation Environment
- Do not use the Sensor Head in an environment where explosive or flammable gas is present.
- To secure the safety of operation and maintenance, do not install the Sensor Head close to high-voltage devices or power devices.
- 2. Power Supply and Wiring
- Always use an E3NC-LA , E3NC-LA0, E3NC-SA or E3NC-SA0 Amplifier Unit. If a different Amplifier Unit is used, damage or fire may occur.
- If you short the cable, reconnect it as specified. If the connections are not correct, damage or fire may occur.
- High-voltage lines and power lines must be wired separately from the Sensor Head. Wiring them together or placing them in the same duct may cause induction, resulting in malfunction or damage.
- Always turn OFF the power supply before connecting or disconnecting the connectors.
- 3. Installation
- Use screws for installation and tighten the screws securely, but do not exceed the specified tightening torque.
   Specified torque (M3): 0.5 N·m
- 4. Others
- Never disassemble (including removing labels), repair, modify, deform by pressure, or incinerate the Sensor Head. Do not turn the adjuster on the E3NC-LH02 with a force that is greater than 40 mN·m. Damage or fire may occur.
- · Dispose of the Sensor Head as industrial waste.
- If you notice any abnormalities, immediately stop using the Sensor Head, turn OFF the power supply, and contact your OMRON representative.
- 5. Conditions of UL
- (Applicable Models: E3NC-LH01/LH02 Only)
- The E3NC-LH series sensor head accessories shall be used with the E3NC-LA amplifiers.

These amplifiers and sensor head accessories shall be installed within a suitable enclosure where all components, including cords and connectors, shall be entirely contained within the same enclosure.

(Applicable Models: E3NC-SH100/SH250 Only)

 The E3NC-SH series sensor head accessories shall be used with the E3NC-SA amplifiers.

These amplifiers and sensor head accessories shall be installed within a suitable enclosure where all components, including cords and connectors, shall be entirely contained within the same enclosure.

6. Shortening the connection cable for use

(Applicable Models: E3NC-LH01/LH02/SH100/SH250 Only) (• The shortened cable has not been evaluated by UL.)

## **Precautions for Correct Use**

Observe the following precautions to prevent failure to operate, malfunctions, or undesirable effects on Sensor Head performance. 1. Installation Environment

Do not install the Sensor Head in locations subject to the following conditions:


- · Ambient temperatures outside of the rated range
- Condensation caused by rapid changes in temperature
- Relative humidity that is not between 35% and 85%
- Corrosive or flammable gas
- Dust, salt, or iron particles
- Direct vibration or shock
- Strong external light interference (such as other laser beams or electric arc-welding machines)
- Direct sunlight or near heaters
- Water, oil, or chemical fumes or spray
- Strong magnetic or electric fields

- 2. Warming Up
- The circuits will be unstable just after the power supply is turned ON, so measurement values may fluctuate gradually.
- For accurate measurements, allow the product to stand for at least 10 minutes after turning ON the power supply before use. (E3NC-S Series)
- 3. Maintenance and Inspection
- Always turn OFF the power supply before adjusting or connecting/ disconnecting the Sensor Head.
- Do not use thinner, benzene, acetone, or kerosene to clean the Sensor Head.
- If large dust particles or dirt adheres to the filter on the front of the Sensor Head, use a blower brush (such as one used to clean camera lenses) to blow it off. Do not blow the dust particles or dirt with your mouth. To remove dust particles or dirt, wipe it off gently with a soft cloth (such as one for cleaning lenses) moistened with a small amount of alcohol. Do not wipe it off with excessive force. Scratches on the filter may cause errors.
- 4. Sensing Object
- The Sensor Head cannot accurately measure objects with the following materials and shapes: Transparent objects (with the E3NC-LH03, objects that are extremely transparent), objects with an extremely low reflection ratio, objects smaller than the spot diameter, objects with a large curvature, excessively inclined objects, etc. Also, for long-distance detection, the Sensor may falsely operate if a white object approaches near the Sensor Head (E3NC-LH03).
- 5. Do not use the Sensor in water, rainfall, or outdoors.
- 6. A ferrite core is attached to the Sensor Head end of the cable connected to the E3NC-LH03 5M. Do not remove the ferrite core or change its position. Also, do not bend the cable within 12 mm of each end of the ferrite core. Doing so may damage the cable.

#### **Attaching a Reflector**

Mount the Reflector as shown in (Correct) below. Errors will be generated if you mount it at the angle shown in (Incorrect). Always install the Reflector at the same angle as the Sensor Head if the head is not mounted vertically or horizontally.


#### Common for all models



Sheet products (E39-RS10/E39-RS11) are peel-off stickers. Peel off the release paper and apply the sheet to a flat surface for installation. If there are any dirt and dust on the installation surface, a reduction in adhesion and deflection of a sheet may occur, resulting in malfunction. **Note:** Beam is irradiated on the glossy surface.

#### Attaching a Lens Attachment (E39-P51 or E39-P52)

- Check the widths of the slots in the Sensor and the widths of the tabs on the Lens Attachment and attach the Lens Attachment as shown below. (The Lens Attachment must be in the correct orientation, so the widths of the tabs on the Lens Attachment are different on the top and bottom.)
- 2. After you attach the Lens Attachment, make sure that the tabs are completely engaged in the slots in the Sensor.



# **Amplifier Units**

#### <u> WARNING</u>

This Amplifier Unit is not designed or rated for ensuring safety of persons either directly or indirectly.

Do not use it for such purposes.

Do not use the Amplifier Unit with voltage in excess of the rated voltage.

Excess voltage may result in malfunction or fire.

Never use the Amplifier Unit with an AC power supply. Otherwise, explosion may result.



#### **Precautions for Safe Use**

The following precautions must be observed to ensure safe operation of the Amplifier Unit. Doing so may cause damage or fire.

- 1. Do not install the Amplifier Unit in the following locations.
- Locations subject to direct sunlight
- Locations subject to condensation due to high humidity
- · Locations subject to corrosive gas
- Locations subject to vibration or mechanical shocks exceeding the rated values
- Locations subject to exposure to water, oil, chemicals
- · Locations subject to steam
- · Locations subjected to strong magnetic field or electric field
- 2. Do not use the Amplifier Unit in environments subject to flammable or explosive gases.
- 3. Do not use the Amplifier Unit in any atmosphere or environment that exceeds the ratings.
- To secure the safety of operation and maintenance, do not install the Amplifier Unit close to high-voltage devices or power devices.
- High-voltage lines and power lines must be wired separately from the Amplifier Unit. Wiring them together or placing them in the same duct may cause induction, resulting in malfunction or damage.
- 6. Do not apply any load exceeding the ratings. Otherwise, damage or fire may result.
- 7. Do not short the load. Otherwise, damage or fire may result.
- 8. Connect the load correctly.
- 9. Do not miswire such as the polarity of the power supply.
- **10.**To use this device as connecting with each other, be sure to connect with the same power supply and turn ON the power simultaneously. Using a separate power supply will influence the functions when connecting the devices to use them.
- 11.Do not use the Amplifier Unit if the case is damaged.
- **12.**Burn injury may occur. The Amplifier Unit surface temperature rises depending on application conditions, such as the ambient temperature and the power supply voltage. Attention must be paid during operation or cleaning.
- 13.When setting the sensor, be sure to check safety such as by stopping the equipment.
- **14.**Be sure to turn off the power supply before connecting or disconnecting wires.
- 15.Do not attempt to disassemble, repair, or modify the Amplifier Unit in any way.
- 16.When disposing of the Amplifier Unit, treat it as industrial waste. 17.Do not use the Sensor in water, rainfall, or outdoors.
- **18.**UL Standard Certification (Applicable Models: E3NC-LA21/LA51/

SA21/SA51 Only) Only the sensors with Enhanced UL Certification Mark are certified by UL. They are intended to be supplied by a "Class 2 circuit". When used in United States and Canada, Please use the same Class 2 source for input and output. The overcurrent protection current rating is 2A max. They were evaluated as Open type and shall be installed within a enclosure.

#### **Precautions for Correct Use**

- 1. Be sure to mount the unit to the DIN track until it clicks.
- When using the Amplifier Units with Wire-saving Connectors, attach the protective stickers (provided with E3X-CN-series Connectors) on the unused power pins to prevent electrical shock and short circuiting.

When using the Amplifier Units with Connectors for Communications Units, attach the protective caps (provided with E3NW-series Sensor Communications Unit).

Amplifier Unit with Wiresaving Connector Amplifier Unit with Connector for Sensor Communications Unit



Protective cap

connecting terminals 3. Use an extension cable with a minimum thickness of 0.3 mm<sup>2</sup> and

- less than 10 m long.
- 4. Do not apply the forces on the cord exceeding the following limits: Pull: 40 N; torque: 0.1 N·m; pressure: 20 N; bending: 29.4 N
- Do not apply excessive force (9.8 N max.) such as tension, compression or torsion to the connector of the Sensor Head that is fixed to the Amplifier Unit.
- 6. Always keep the protective cover in place when using the Amplifier Unit. Not doing so may cause malfunction.
- It may take time until the received light intensity and measured value become stable immediately after the power is turned on depending on use environment.
- 8. The product is ready to operate 200 ms after the power supply is turned ON.
- 9. The Mobile Console E3X-MC11, E3X-MC11-SV2 and E3X-MC11-S cannot be connected.
- 10. The mutual interference prevention function does not work when in combination with E3C/E2C/E3X.
- 11.If the unit receives excessive sensor light, the mutual interference prevention function may not work properly, resulting in malfunction of the unit. In such case, increase the threshold.
  12.Standard models (E3NC-□A21/51/7/9)


12.Standard models (E3NC-\\_A21/51/7/9) The Sensor Communications Unit E3X-DRT21-S, E3X-CRT, E3X-ECT and E3NW cannot be connected. Model for Sensor Communications Unit (E3NC-\\_A0) The Sensor Communications Unit E3NW can be connected. E3X-DRT21-S, E3X-CRT, E3X-ECT cannot be connected.

- **13.**If you notice an abnormal condition such as a strange odor, extreme heating of the unit, or smoke immediately stop using the product, turn off the power, and consult your dealer.
- 14.Do not use thinner, benzene, acetone, and lamp oil for cleaning.


# **Dimensions**

# **Sensor Heads**


#### Retro-reflective Model E3NC-LH03

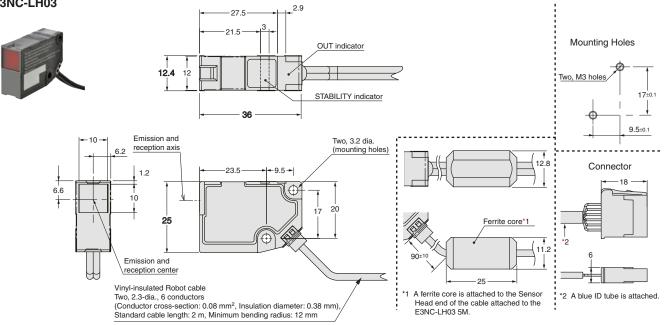


#### Diffuse-reflective Model E3NC-LH02

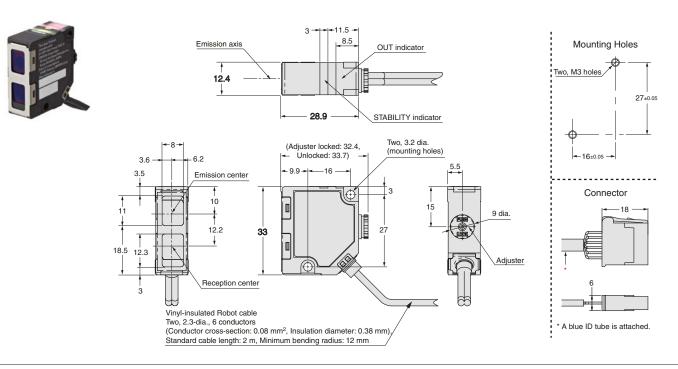

#### Limited-reflective Model E3NC-LH01

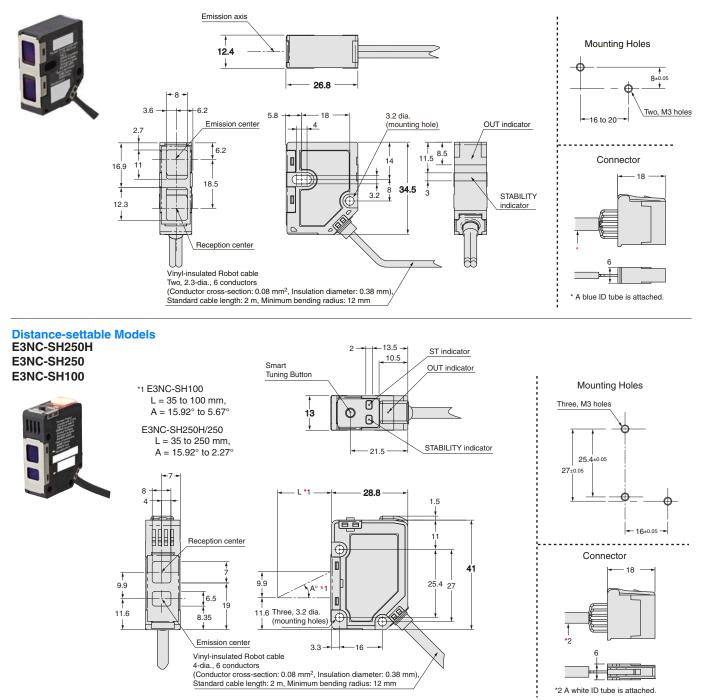

# **Amplifier Units**

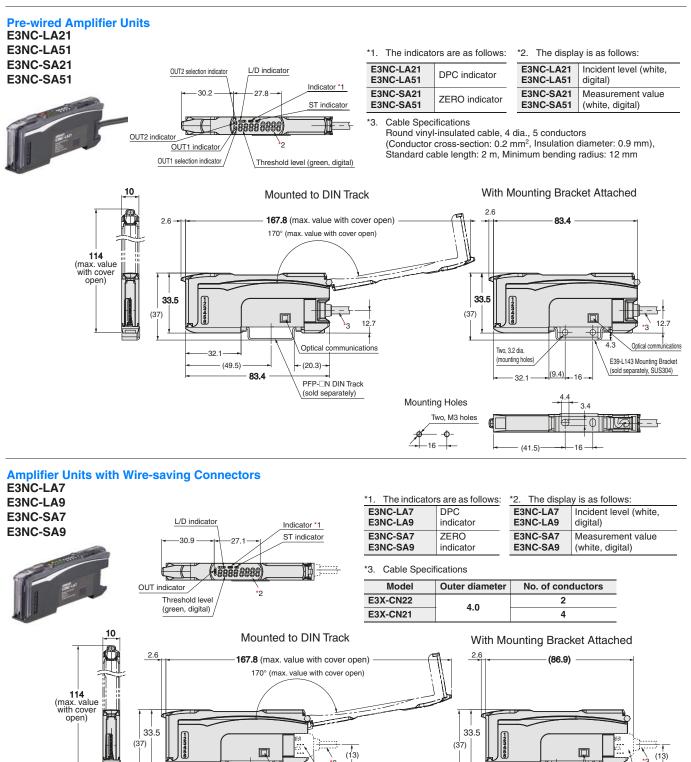

Optical cor

PFP-DN DIN Track

(sold separately)

-(23.8)

32.1

(49.5)

(86.9)

unications

Wire-saving Connector

Mounting Holes Two, M3 holes

φ

(sold separately)

Wire-saving

Connecto

communications (sold separately)

E39-L143 Mounting Bracket

(sold separately, SUS304)

٩ſ

5

0

. htica

Ne

(9.4)

h

16


-16 -

Two, 3.2 dia


(mounting holes)

32.

-(41.5)

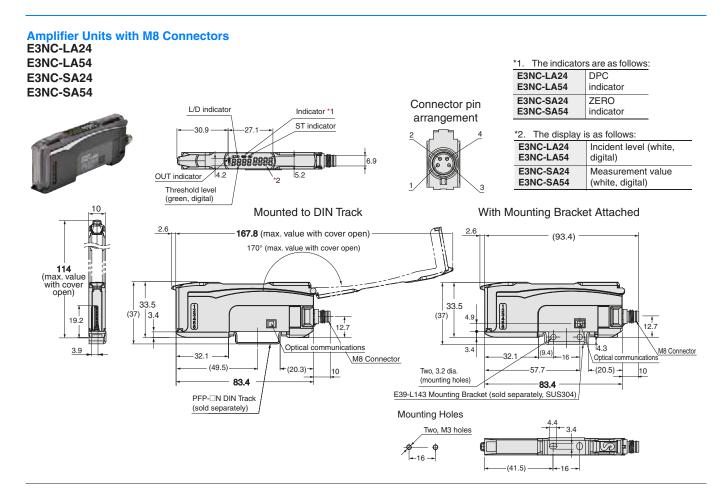


#### Amplifier Units with Connectors for Sensor Communications Unit E3NC-LA0 E3NC-SA0

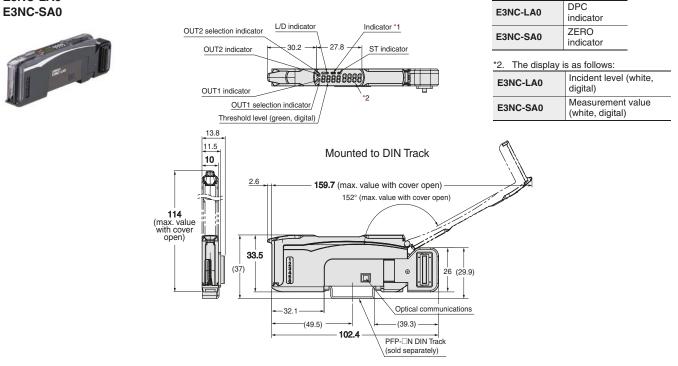


\*1. The indicators are as follows:

# Accessories (Sold Separately)

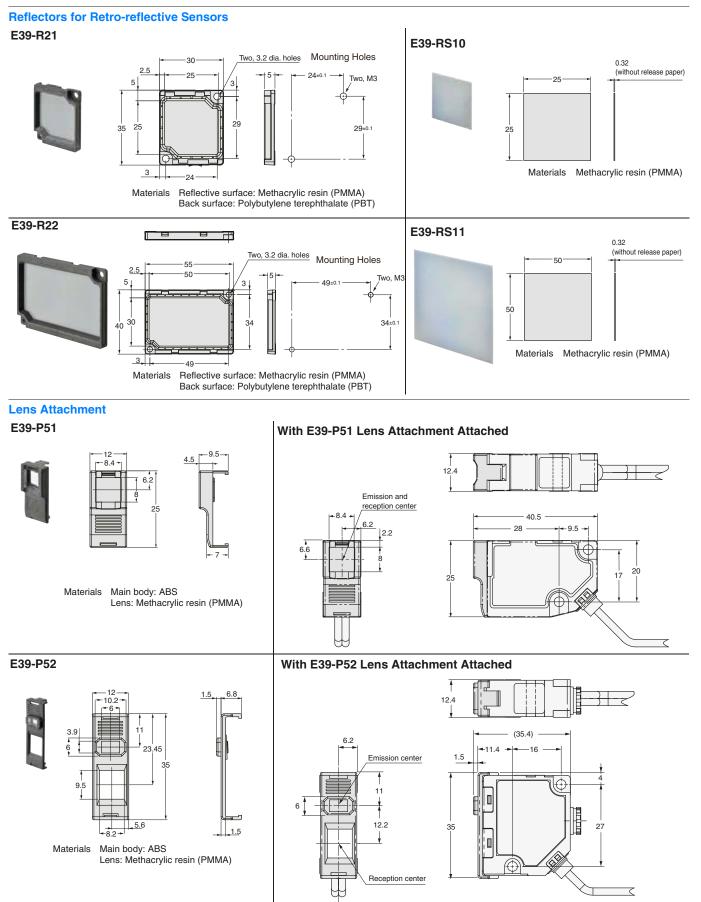


#### Sensor Head Mounting Brackets E39-L190







Mounting Bracket

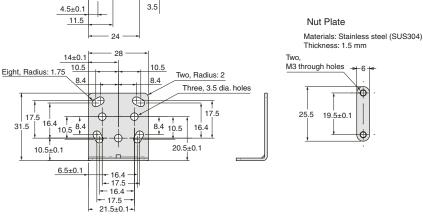

#### With E39-L190 Mounting Bracket Attached for Bottom Mounting

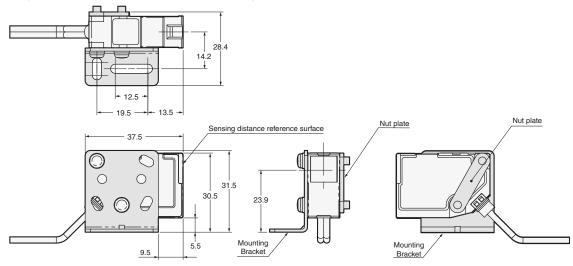


#### With E39-L190 Mounting Bracket Attached for Back Mounting

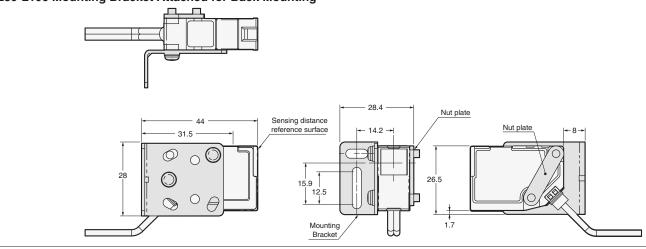


#### E39-L185



Accessories: Phillips screws (M3×18, P = 0.5, stainless steel): 2 Nut plate: 1



#### With E39-L185 Mounting Bracket Attached

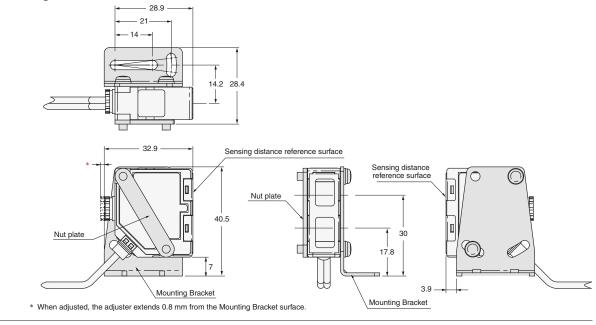


#### E39-L186

#### Mounting Bracket Material: Stainless steel (SUS304)




Thickness: 1.2 mm Accessories: Phillips screws (M3×18, P = 0.5, stainless steel): 2 Nut plate: 1




# E3NC

#### With E39-L186 Mounting Bracket Attached for Bottom Mounting

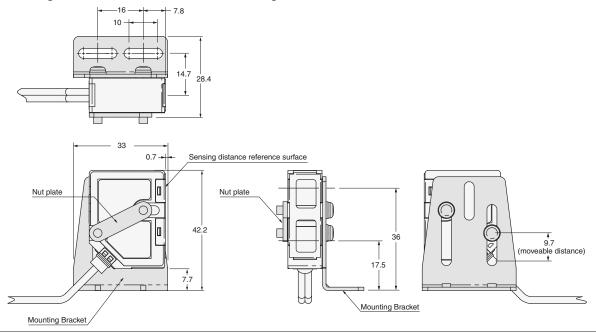




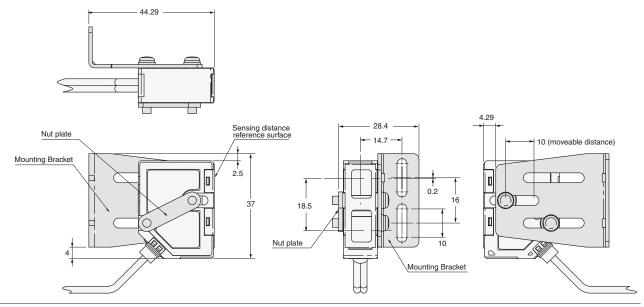


#### E39-L187




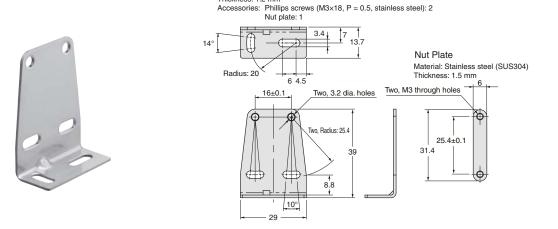


With E39-L187 Mounting Bracket Attached

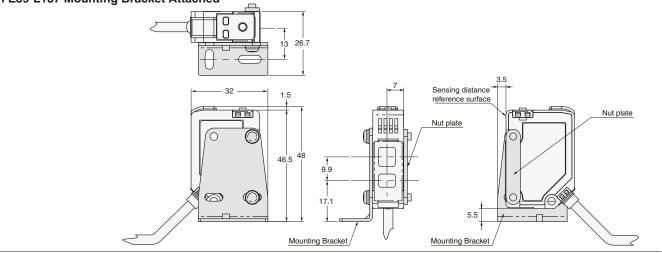

#### E39-L188

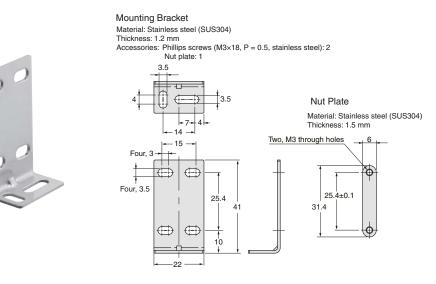


#### With E39-L188 Mounting Bracket Attached

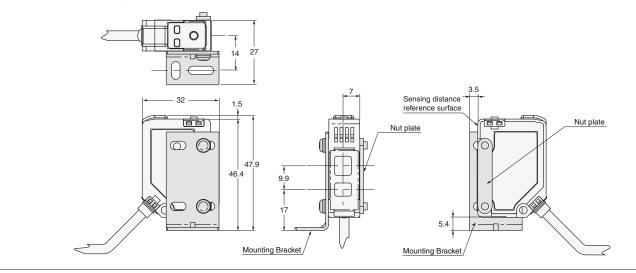

## **Wire-saving Connectors**

#### Master Connector E3X-CN21




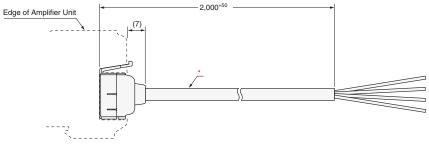

\*4-dia. cable with 4 conductors, Standard cable length: 2 m (Conductor cross-section: 0.2 mm<sup>2</sup> (AWG24), Insulation diameter: 1.1 mm)


#### Slave Connector E3X-CN22



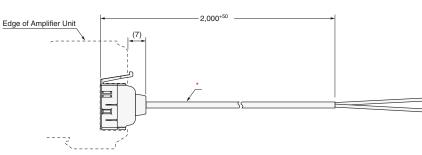


\*4-dia. cable with 2 conductors, Standard cable length: 2 m (Conductor cross-section: 0.2 mm<sup>2</sup> (AWG24), Insulation diameter: 1.1 mm)

# Sensor I/O Connectors




L-shaped XS3F-M422-40□-A




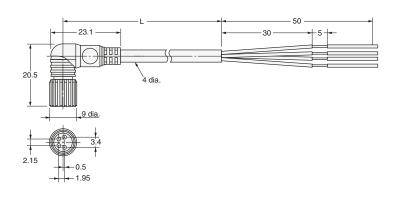

#### Amplifier Unit Mounting Bracket E39-L143

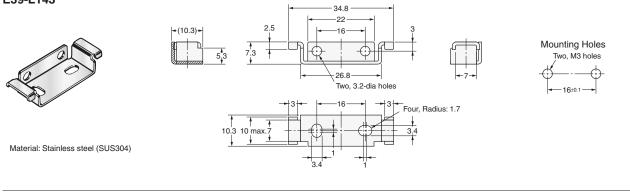


#### DIN Track PFP-100N PFP-50N



Material: Aluminum


#### PFP-100N2




Material: Aluminum

#### End Plate PFP-M







Materials: Iron, zinc plating

– CONSULTING DISTRIBUTOR –



#### Terms and Conditions Agreement

Read and understand this catalog.

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.

Warranties.

(a) Exclusive Warranty. Omron's exclusive warranty is that the Products will be free from defects in materials and workmanship for a period of twelve months from the date of sale by Omron (or such other period expressed in writing by Omron). Omron disclaims all other warranties, express or implied.

(b) Limitations. OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, ABOUT NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OF THE PRODUCTS. BUYER ACKNOWLEDGES THAT IT ALONE HAS DETERMINED THAT THE

PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE.

Omron further disclaims all warranties and responsibility of any type for claims or expenses based on infringement by the Products or otherwise of any intellectual property right. (c) Buyer Remedy. Omron's sole obligation hereunder shall be, at Omron's election, to (i) replace (in the form originally shipped with Buyer responsible for labor charges for removal or replacement thereof) the non-complying Product, (ii) repair the non-complying Product, or (iii) repay or credit Buyer an amount equal to the purchase price of the non-complying Product; provided that in no event shall Omron be responsible for warranty, repair, indemnity or any other claims or expenses regarding the Products unless Omron's analysis confirms that the Products were properly handled, stored, installed and maintained and not subject to contamination, abuse, misuse or inappropriate modification. Return of any Products by Buyer must be approved in writing by Omron before shipment. Omron Companies shall not be liable for the suitability or unsuitability or the results from the use of Products in combination with any electrical or electronic components, circuits, system assemblies or any other materials or substances or environments. Any advice, recommendations or information given orally or in writing, are not to be construed as an amendment or addition to the above warranty.

See <u>http://www.omron.com/global/</u> or contact your Omron representative for published information.

#### Limitation on Liability; Etc.

OMRON COMPANIES SHALL NOT BE LIABLE FOR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR PRODUCTION OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED IN CONTRACT, WARRANTY, NEGLIGENCE OR STRICT LIABILITY.

Further, in no event shall liability of Omron Companies exceed the individual price of the Product on which liability is asserted.

#### Suitability of Use.

Omron Companies shall not be responsible for conformity with any standards, codes or regulations which apply to the combination of the Product in the Buyer's application or use of the Product. At Buyer's request, Omron will provide applicable third party certification documents identifying ratings and limitations of use which apply to the Product. This information by itself is not sufficient for a complete determination of the suitability of the Product in combination with the end product, machine, system, or other application or use. Buyer shall be solely responsible for determining appropriateness of the particular Product with respect to Buyer's application, product or system. Buyer shall take application responsibility in all cases.

NEVER USE THE PRODUCT FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY OR IN LARGE QUANTITIES WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCT(S) IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

#### Programmable Products.

Omron Companies shall not be responsible for the user's programming of a programmable Product, or any consequence thereof.

#### Performance Data.

Data presented in Omron Company websites, catalogs and other materials is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of Omron's test conditions, and the user must correlate it to actual application requirements. Actual performance is subject to the Omron's Warranty and Limitations of Liability.

#### Change in Specifications.

Product specifications and accessories may be changed at any time based on improvements and other reasons. It is our practice to change part numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the Product may be changed without any notice. When in doubt, special part numbers may be assigned to fix or establish key specifications for your application. Please consult with your Omron's representative at any time to confirm actual specifications of purchased Product.

Errors and Omissions. Information presented by Omron Companies has been checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical or proofreading errors or omissions.

In the interest of product improvement, specifications are subject to change without notice.

**OMRON** Corporation Industrial Automation Company