



## TECHNICAL SPECIFICATIONS

FEATURES SUMMARY	MERCURY6E SERIES		
	M6e	Micro & Micro-LTE	ThingMagic Nano
Dimensions	69 mm L x 43 mm W x 7.5 mm H (2.7 in L by 1.7 in W by 0.3 in H)	46 mm L x 26 mm W x 4.0 mm H (1.8 in L x 1.0 in W x 0.16 in H)	22 mm L x 26 mm W x 3.0 mm H (0.866 in L x 1.024 in W x 0.118 in H)
RFID Protocol Support	EPCglobal Gen 2 (ISO 18000-6C) with DRM; ISO 18000-6B and IP-X optional; EPCglobal G2V2 (ISO 18000-63) pending market availability		EPCglobal Gen 2 (ISO 18000-6C); EPCglobal G2V2 (ISO 18000-63) pending market availability
Antenna Connector	Four 50 Ohm MMCX connectors supporting four monostatic antennas	Two 50 Ohm connections (board-edge or U.FL) supporting two monostatic antennas	Single 50 Ohm connection (board-edge) supporting a monostatic antenna
RF Power Output	Separate read and write levels, command adjustable from +5 dBm to +31.5 dBm (1.4W) with +/-0.5 dBm accuracy above +15 dBm <sup>1</sup>	Separate read and write levels, commanded adjustable from -5 dBm to +30 dBm (1W) in 0.5 dB steps, accurate to +/- 1 dBm <sup>2</sup>	Separate read and write levels, command adjustable from 0 dBm to +27 dBm (500mW) in 0.01 dB steps
Regulatory	Pre-configured and screened for the following regions: FCC (NA, SA), ETSI (EU), TRAI (India), KCC (Korea), ACMA (Australia), SRRC-MII (P.R.China), 'Open' (Customizable) 865-869 MHz and 902-928 MHz	Pre-configured for the following regions: FCC (NA, SA), ETSI (EU), TRAI (India), KCC (Korea), ACMA (Australia), SRRC-MII (P.R. China), MIC (Japan), 'Open' (Customizable) 865-868 MHz and 902-928 MHz	Pre-configured for the following regions: FCC (NA, SA), ETSI (EU), TRAI (India), KCC (Korea) MHz, ACMA (Australia) MHz, SRRC-MII (P.R.China), MIC (Japan), 'Open' (Customizable) 865-870 MHz and 915-928 MHz
Physical	15-pin low-profile connector providing DC power, communication, control and GPIO signals	28 board-edge connections or 20-pin Molex low profile connector (53748-0208) providing access to RF, DC power, communication, control and GPIO signals	41 board-edge connections providing access to RF, DC power, communication, control and GPIO signals
Data Interfaces	UART with 3.3/5V logic levels from 9.6 to 921.6 kbps; USB 2.0 full speed device port (up to 12 Mbps)	UART with 3.3/5V logic levels from 9.6 to 921.6 kbps; USB 2.0 full speed device port (up to 12 Mbps)	UART; 3.3V logic levels; 9.6 to 921.6 kbps
Control Interfaces	Shutdown Control and Reset Indicator		Shutdown Control
GPIO Sensors and Indicators	Four 3.3V bidirectional ports configurable as input (sensor) ports or output (indicator) ports	Two 3.3V bidi rectional ports configurable as input (sensor) ports or output (indicator) ports	Four 3.3V bidirectional ports configurable as input (sensor) ports or output (indicator) ports
API Support	C#/.NET, Java, C	C#/.NET, Java, C	C#/.NET, Java, C
DC Power Required	DC Voltage: 5.0 V +/- 5% DC power consumption when reading: 6.7 W @ +31.5 dBm 4.2 W @ power levels under +17 dBm	DC Voltage: 3.5 to 5.25 V <sup>3</sup> DC power consumption when reading: 5.5 W @ +30 dBm 3.5 W @ +27 dBm 2.5 W @ +23 dBm 2.0 W @ 0 dBm	DC Voltage: 3.3 to 5.25 V for +25 dBm out 3.7 to 5.25 V for +27 dBm out DC power consumption when reading: 3.7 W @ 5 VDC for +27 dBm out 3.2 W @ 5 VDC for +25 dBm out 1.6 W @ 5 VDC for 0 dBm out

## TECHNICAL SPECIFICATIONS

FEATURES SUMMARY	MERCURY6E SERIES		
	M6e	Micro & Micro-LTE	ThingMagic Nano
Idle Power Consumption:	0.25 W	0.32 W	0.84 W
	<b>Power Saving Options:</b>	<b>Power Saving Options:</b>	<b>Power Saving Options:</b>
Standby:	0.12 W	0.06 W	0.04 W
Sleep:	0.005 W	0.008 W	0.02 W
Shutdown:	0.00025 W	0.00025 W	0.00025 W
Certification	FCC 47 CFR Ch. 1 Part 15 Industrie Canada RSS-21 0	ETSI EN 302 208 v3.1.1 (RED 2014/53/EU)	
Operating Temp (case temperature)	-40C to +60C	-20C to +60C	-20C to +70C
Storage Temp.	-40C to +85C	-40C to +85C	-40C to +85C
Shock and Vibration	Designed to be installed in host devices which are required to survive 5-foot drops to concrete	Survives 1 meter drop during handling	Survives 1 meter drop during handling
Max Read Rate	Up to 750 tags/second using high-performance settings	Micro: Up to 750 tags/second using high-performance settings Micro-LTE : 50 tags/second	Up to 200 tags/second
Max Tag Read Distance	Over 30 feet (9 m) with 6 dBiL antenna (36 dBm EIRP)	Over 30 feet (9 m) with 6 dBiL antenna (36 dBm EIRP)	Over 10 feet (3 m) with 6 dBiL antenna (33 dBm EIRP)

<sup>1</sup>Maximum power may have to be reduced to meet regulatory limits, which specify the combined effect of the module, antenna, cable, and enclosure shielding of the integrated product. Adequate heat sinking required to run continuously at maximum power. <sup>2</sup>Duty cycle restrictions, based on temperature, apply at power levels above +23 dBm. <sup>3</sup>Will operate below +3.5 V with reduced input line noise immunity. Specifications subject to change without notice.

## ORDERING INFORMATION

<b>Mercury6e Series Embedded RFID Readers</b>	<b>SKU</b>
M6e - Embedded (+30 dBm in North America, +31.5 dBm in Europe)	M6E
M6e-A - Embedded (+31.5 dBm in all regions, requires contract)	M6E-A
M6e-JIC - Embedded (PRC high and low bands)	M6E-JIC
Micro (M6E-M) - North/South America, EU, IN, KR, PRC	M6E-M
Micro-LTE (M6E-MICRO) - North/South America, EU, IN, KR, PRC	M6E-MICRO
M6e license for optional IPX and ISO 18K-6B protocols (Gen2 standard)	M6E-LIC-2F
Micro (M6E-M) license for optional IPX and ISO 18K-6B protocols (Gen2 standard)	M6E-M-LIC-2F
Micro-LTE (M6E-MICRO) license for optional IPX and ISO 18k-6B protocols (Gen2 standard)	M6E-MICRO-LIC-2F
ThingMagic Nano - North/South America, EU, IN, KR, PRC	M6E-NANO
<b>Mercury6e Series Embedded RFID Reader Development Kits</b>	<b>SKU</b>
M6e Development Kit (North/South America, EU, IN, KR)	M6E-DEVKIT
Micro (M6E-M) - Development Kit (North/South America, EU, IN, KR, PRC)	M6E-M-DEVKIT
Micro-LTE (M6E-MICRO) - Development Kit (North/South America, EU, IN, KR, PRC)	M6E-MICRO-DEVKIT
ThingMagic Nano Development Kit (North/South America, EU, IN, KR, PRC)	M6E-NANO-DEVKIT



## MAKING RFID EASY TO USE

ThingMagic is dedicated to driving the barriers to deploying RFID technology as low as possible. We design our products to be easy to use out-of-the box and to deliver predictable, reliable and repeatable performance. Our development tools require little RFID expertise, enabling you to rapidly design, test and deploy your RFID solutions.

### Developers Kit

Everything needed to read and write RFID tags and begin developing RFID-enabled applications:

- Test chassis
- Cables
- Antenna
- Sample Tags
- Full schematics to help you design your own complementary components


### Mercury xPRESS Sensor Hub

An extensible, compliance-ready solution development platform that enables companies to rapidly create cost-effective finished reader devices.



### Mercury API

A common development platform, supporting an extensive variety of hardware to connect, configure and control ThingMagic readers.

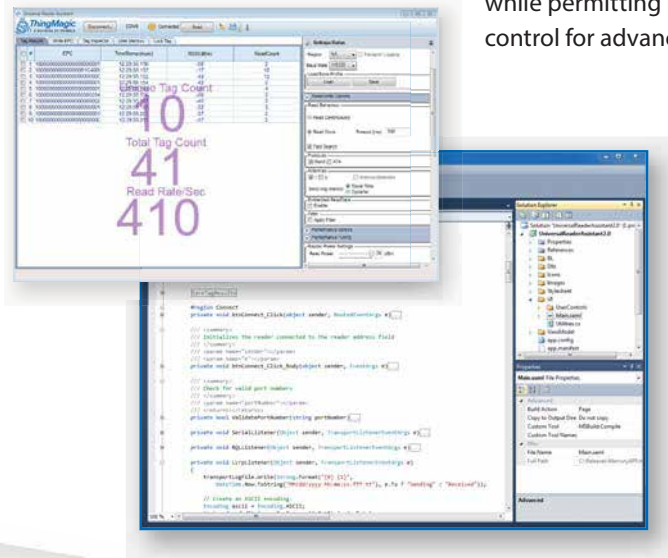

### Universal Reader Assistant

A utility for advanced demo, testing and tuning of all ThingMagic readers. Reduces complexity for novice users while permitting low-level control for advanced developers.

CONSULTING DISTRIBUTOR



**POHL**

POHL Electronic GmbH  
Eduard-Mauer-Strasse 11a • 16761 Hennigsdorf  
Tel. +49 3302 81893-0 • Fax +49 3302 81893-99  
www.pohl-electronic.de • info@pohl-electronic.de



**USA Office**  
7279 William Barry Blvd.  
North Syracuse, NY  
13212-3349

**European Office**  
Emmastraat 16  
4811 AG Breda  
The Netherlands

**Asia Pacific Office**  
Building 8  
Gangtian Industrial Square  
GangTian Road  
Suzhou Industrial Park  
JiangSu, China 215024



+1 315.701.0678 Phone  
+1 315.701.0679 Fax  
email: info@jadaktech.com

+31 (0)76.522.5588 Phone  
+31 (0)76.522.4747 Fax  
email: info@jadak.eu

+86 512.6283.7080 Phone  
email: info@jadaktech.com

**JADAK**<sup>®</sup>  
visionary thinking