


New
BK60AAAH
 AAA size(HR11/49)

Old
 (HHR60AAAH)

High temperature & long life type



Dimensions (with tube)

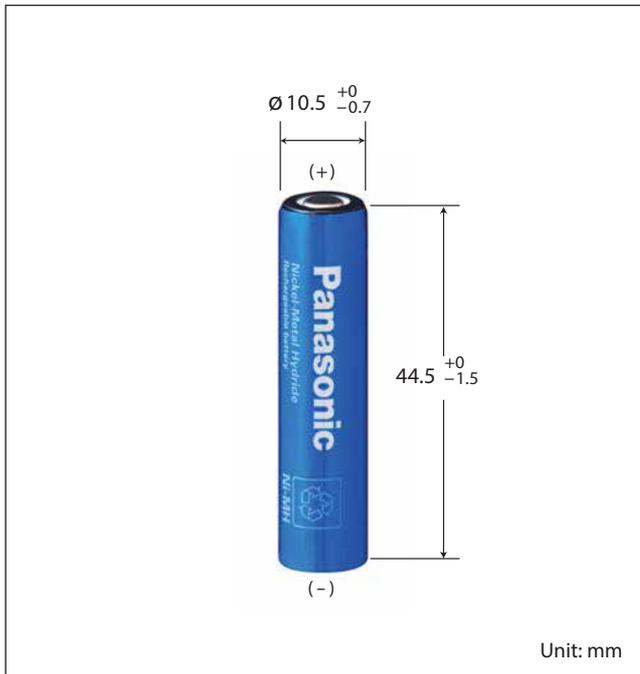



Specifications

| | | | |
|--|--------------|------------------------------------|-----------|
| Diameter | | 10.5 +0 / -0.7 mm | |
| Height | | 44.5 +0 / -1.5 mm | |
| Approximate Weight | | 13 g | |
| Nominal Voltage | | 1.2 V | |
| Discharge Capacity | Average | 550 mAh | |
| | Rated (min.) | 500 mAh | |
| Approx. Internal impedance at 1000Hz at charged state. | | 35 mΩ | |
| Charge | Standard | 50 mA X 16 hrs. | |
| | Rapid *3 | 250 mA X 2.4 hrs. | |
| | Low rate | 25 mA X 32 hrs. 17 mA X 48 hrs. | |
| Ambient Temperature | Charge | Standard | -10 to 60 |
| | | Rapid | -10 to 60 |
| | | Low rate | -10 to 45 |
| Storage | Discharge | | -10 to 60 |
| | <1 year | <1 year | -20 to 35 |
| | | <6 months | -20 to 45 |
| | | <1 month | -20 to 55 |
| | | <1 week | -20 to 65 |


*1 After charging at 0.1 It for 16 hours, discharging at 0.2 It.
 *2 For reference only.
 *3 Need specially designed control system. Please contact Panasonic for details.

Battery performance and cycle life are strongly affected by how they are used. In order to maximize battery safety, please consult Panasonic when determining charge/discharge specs, warning label contents and unit design.

Typical charge characteristics

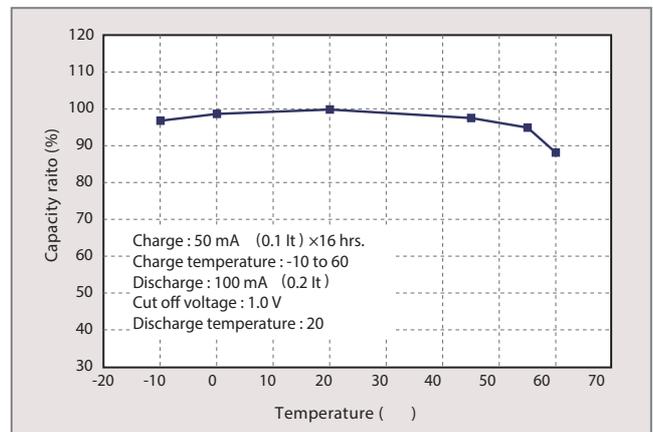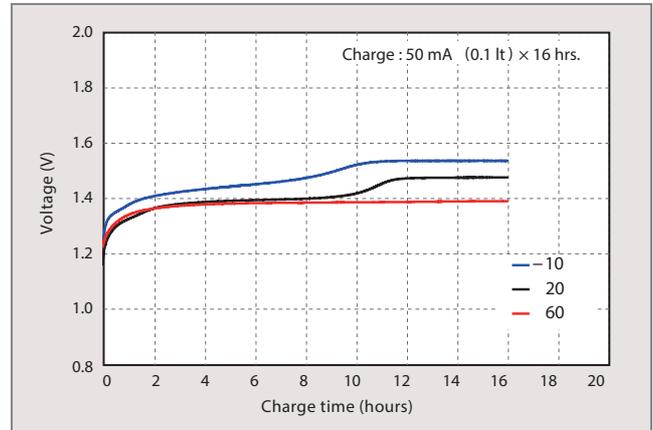

Typical discharge characteristics

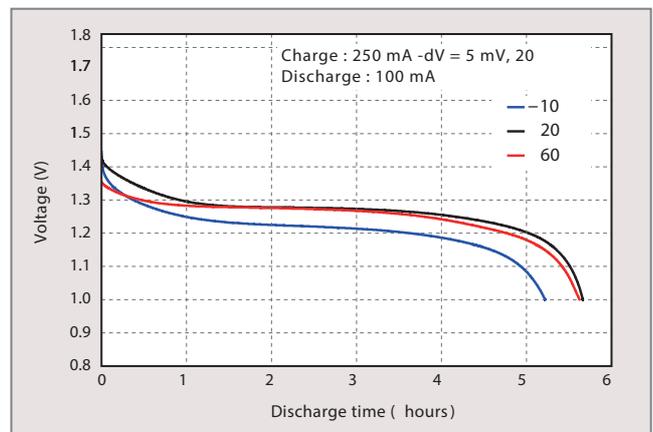

CONSULTING DISTRIBUTOR



POHL

POHL Electronic GmbH
 Eduard-Maurens-Straße 11a • 16761 Hennigsdorf
 Tel. +49 3302 81893-0 • Fax +49 3302 81893-99
 www.pohl-electronic.de • info@pohl-electronic.de

*The data in this document are for descriptive purposes only and are not intended to make or imply any guarantee or warranty.