

CR-1025

CR-1216





CR-1220

CR-1612

CONSULTING DISTRIBUTOR



POHL Electronic GmbH
Edwards-Maere-Strasse 11a • 16261 Hennigsdorf
Tel. +49 3302 81892-0 • Fax +49 3302 81892-999
www.pohl-electronic.de • info@pohl-electronic.de




SPECIFICATIONS	
Name	CR-1025
Nominal voltage (V)	3
Nominal capacity (mAh)	30
Continuous drain (mA)	0.1
Operating temperature (°C)	-30 to +60
Weight (g)	0.7

SPECIFICATIONS	
Name	CR-1216
Nominal voltage (V)	3
Nominal capacity (mAh)	25
Continuous drain (mA)	0.1
Operating temperature (°C)	-30 to +60
Weight (g)	0.7


SPECIFICATIONS	
Name	CR-1220
Nominal voltage (V)	3
Nominal capacity (mAh)	35
Continuous drain (mA)	0.1
Operating temperature (°C)	-30 to +60
Weight (g)	1.2

SPECIFICATIONS	
Name	CR-1612
Nominal voltage (V)	3
Nominal capacity (mAh)	40
Continuous drain (mA)	0.1
Operating temperature (°C)	-30 to +60
Weight (g)	0.8


DISCHARGE TEMPERATURE CHARACTERISTICS

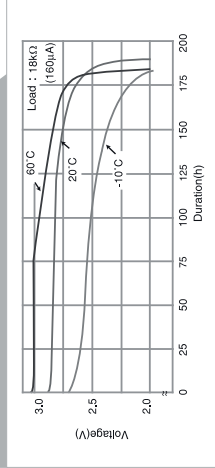


DISCHARGE TEMPERATURE CHARACTERISTICS

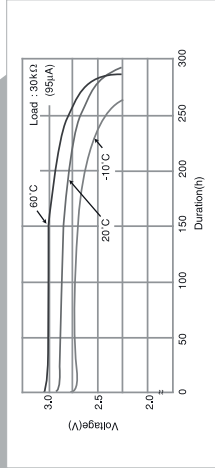


DISCHARGE TEMPERATURE CHARACTERISTICS

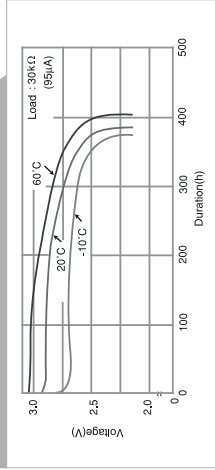


DISCHARGE TEMPERATURE CHARACTERISTICS

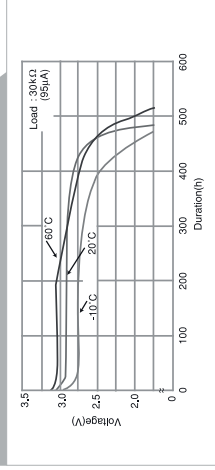


OPERATING VOLTAGE VS. DISCHARGE CURRENT*

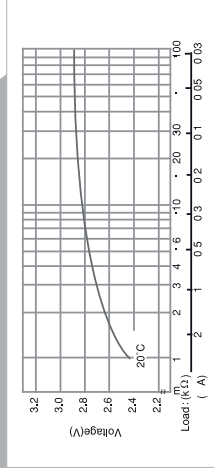


OPERATING VOLTAGE VS. DISCHARGE CURRENT*

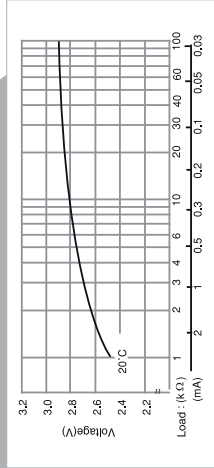


OPERATING VOLTAGE VS. DISCHARGE CURRENT*

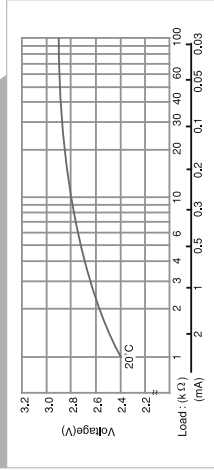


OPERATING VOLTAGE VS. DISCHARGE CURRENT*

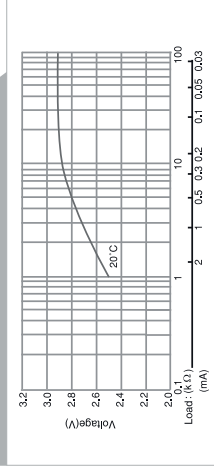


CAPACITY VS. LOAD RESISTANCE

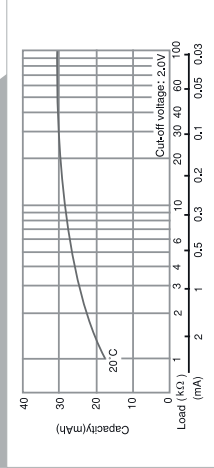


CAPACITY VS. LOAD RESISTANCE

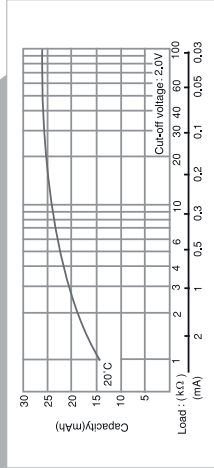


CAPACITY VS. LOAD RESISTANCE

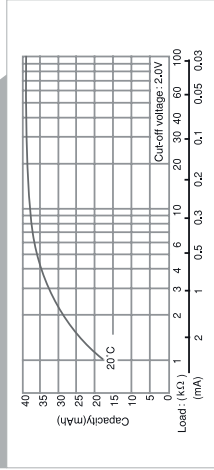

CAPACITY VS. LOAD RESISTANCE

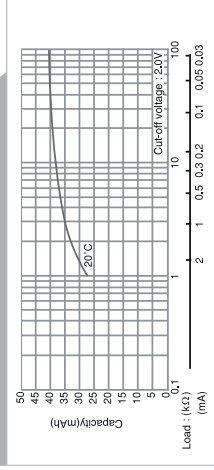


CR-1616




SPECIFICATIONS	
Name	CR-1616
Nominal voltage (V)	3
Nominal capacity (mAh)	55
Continuous drain (mA)	0.1
Operating temperature (°C)	-30 to +60
Weight (g)	1.2


DISCHARGE TEMPERATURE CHARACTERISTICS

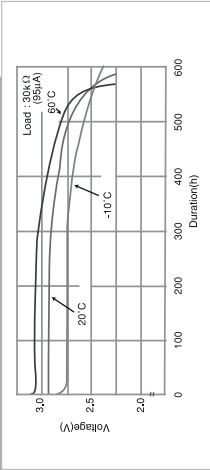


OPERATING VOLTAGE VS. DISCHARGE CURRENT*

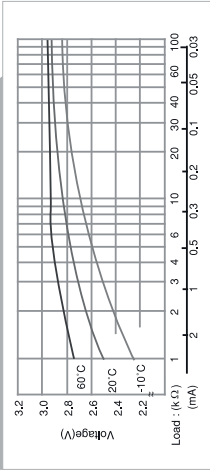

CAPACITY VS. LOAD RESISTANCE

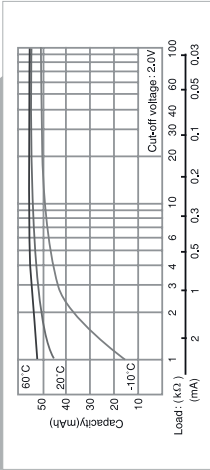


CR-1620




SPECIFICATIONS	
Name	CR-1620
Nominal voltage (V)	3
Nominal capacity (mAh)	75
Continuous drain (mA)	0.1
Operating temperature (°C)	-30 to +60
Weight (g)	1.3


DISCHARGE TEMPERATURE CHARACTERISTICS

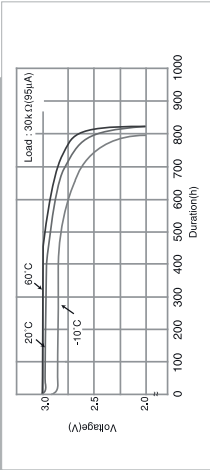


OPERATING VOLTAGE VS. DISCHARGE CURRENT*

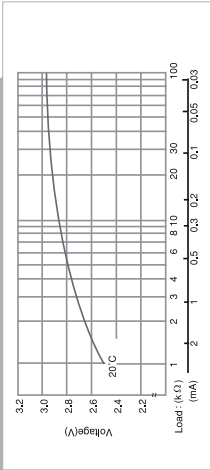

CAPACITY VS. LOAD RESISTANCE

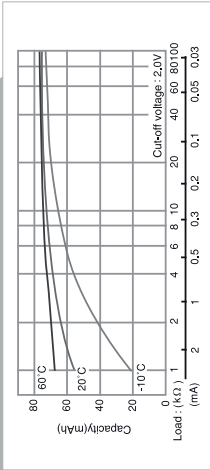


CR-1632




SPECIFICATIONS	
Name	CR-1632
Nominal voltage (V)	3
Nominal capacity (mAh)	140
Continuous drain (mA)	0.1
Operating temperature (°C)	-30 to +60
Weight (g)	1.8


DISCHARGE TEMPERATURE CHARACTERISTICS

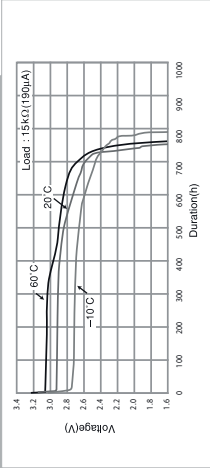


OPERATING VOLTAGE VS. DISCHARGE CURRENT*

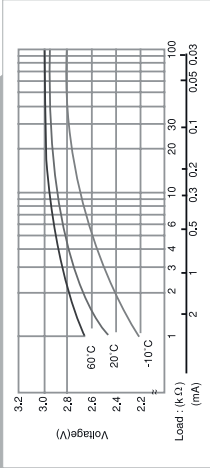

CAPACITY VS. LOAD RESISTANCE

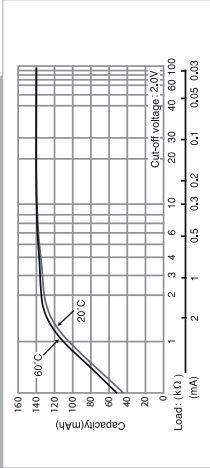


CR-2012




SPECIFICATIONS	
Name	CR-2012
Nominal voltage (V)	3
Nominal capacity (mAh)	55
Continuous drain (mA)	0.1
Operating temperature (°C)	-30 to +60
Weight (g)	1.4


DISCHARGE TEMPERATURE CHARACTERISTICS

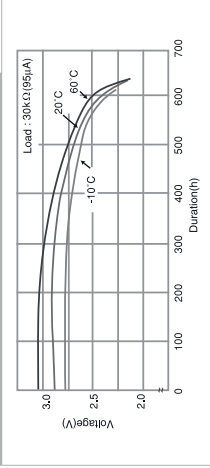


OPERATING VOLTAGE VS. DISCHARGE CURRENT*

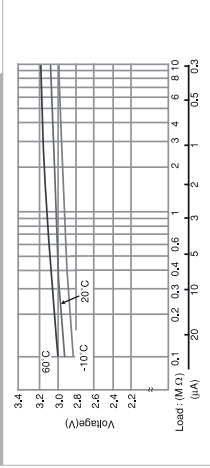

CAPACITY VS. LOAD RESISTANCE

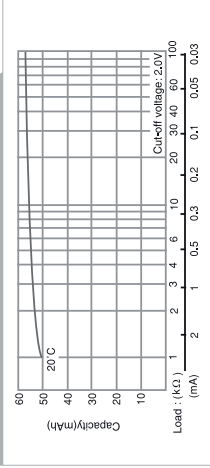


CR-2016




SPECIFICATIONS	
Name	CR-2016
Nominal voltage [V]	3
Nominal capacity [mAh]	90
Continuous drain [mA]	0.1
Operating temperature [°C]	-30 to +60
Weight [g]	1.6


DISCHARGE TEMPERATURE CHARACTERISTICS

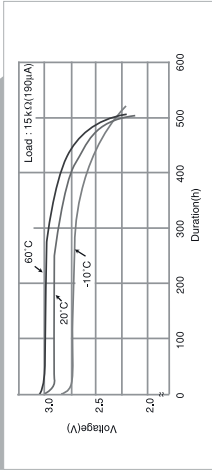


OPERATING VOLTAGE VS. DISCHARGE CURRENT*

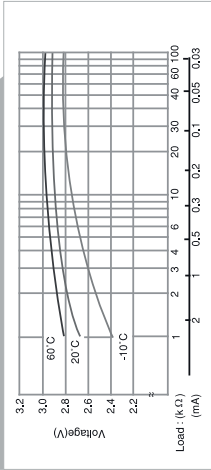

CAPACITY VS. LOAD RESISTANCE

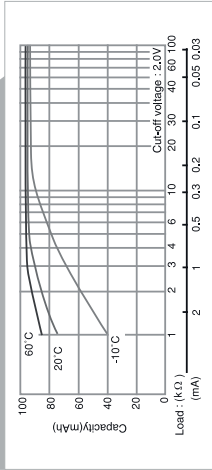


CR-2025




SPECIFICATIONS	
Name	CR-2025
Nominal voltage [V]	3
Nominal capacity [mAh]	165
Continuous drain [mA]	0.2
Operating temperature [°C]	-30 to +60
Weight [g]	2.3


DISCHARGE TEMPERATURE CHARACTERISTICS

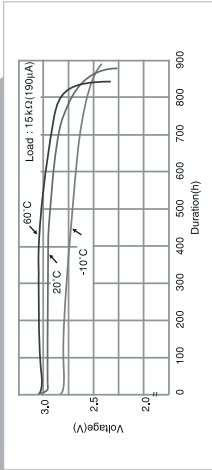


OPERATING VOLTAGE VS. DISCHARGE CURRENT*

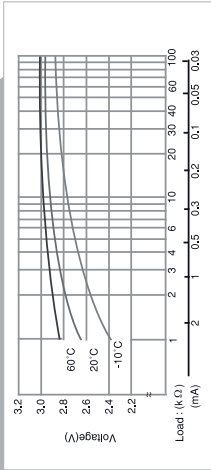

CAPACITY VS. LOAD RESISTANCE

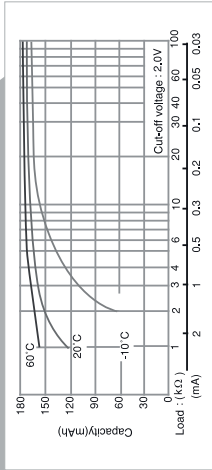


CR-2032




SPECIFICATIONS	
Name	CR-2032
Nominal voltage [V]	3
Nominal capacity [mAh]	220
Continuous drain [mA]	0.2
Operating temperature [°C]	-30 to +60
Weight [g]	2.9


DISCHARGE TEMPERATURE CHARACTERISTICS

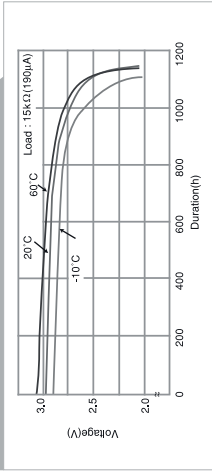

OPERATING VOLTAGE VS. DISCHARGE CURRENT*

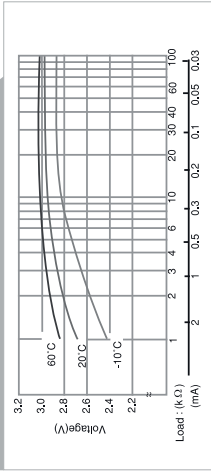

CAPACITY VS. LOAD RESISTANCE

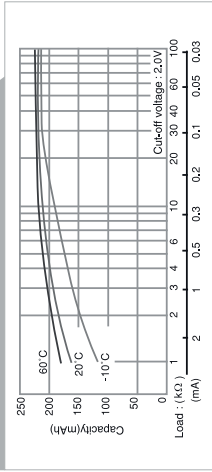


Lithium battery holders for CR-2032


These battery holders are designed for sure and easy loading/removal of Panasonic Coin Type Lithium batteries in/from equipment enabling the batteries to fully exploit their capabilities as the back-up power supply in C-MOS RAM memory and microcomputer memory. All of the battery holders are designed to prevent inverted insertion of the battery.




BCR20H4 (3 terminals)

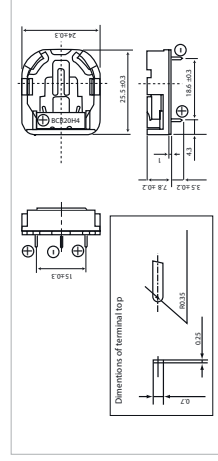

BCR20H5 (2 terminals)

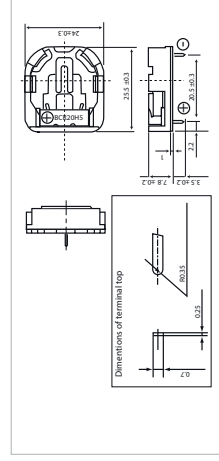


BCR20V4 (3 terminals)

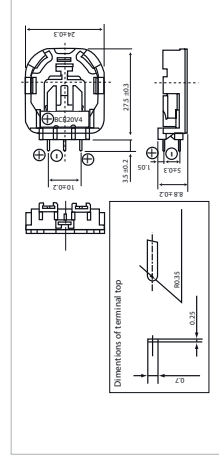

Precaution for washing battery holders


The battery holders can be adversely affected by some detergents use in the circuit board washing process and may result in cracks forming in the holder. Please test the holders in your washing process before use.

CR-2330




SPECIFICATIONS	
Name	CR-2330
Nominal voltage (V)	3
Nominal capacity (mAh)	265
Continuous drain (mA)	0.2
Operating temperature (°C)	-30 to +60
Weight (g)	3.8


DISCHARGE TEMPERATURE CHARACTERISTICS

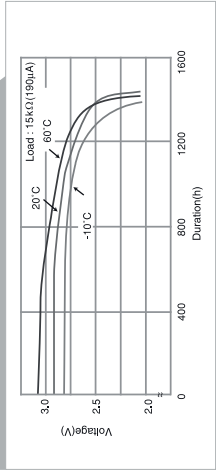


OPERATING VOLTAGE VS. DISCHARGE CURRENT*

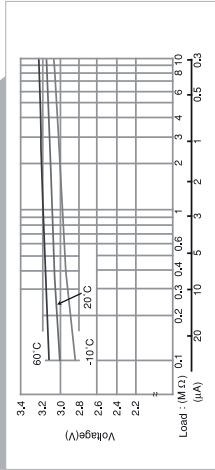

CAPACITY VS. LOAD RESISTANCE

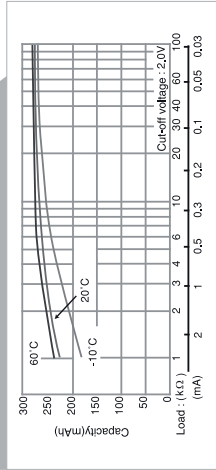


CR-2354




SPECIFICATIONS	
Name	CR-2354
Nominal voltage (V)	3
Nominal capacity (mAh)	560
Continuous drain (mA)	0.2
Operating temperature (°C)	-30 to +60
Weight (g)	5.8


DISCHARGE TEMPERATURE CHARACTERISTICS

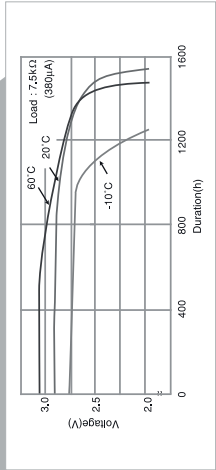


OPERATING VOLTAGE VS. DISCHARGE CURRENT*

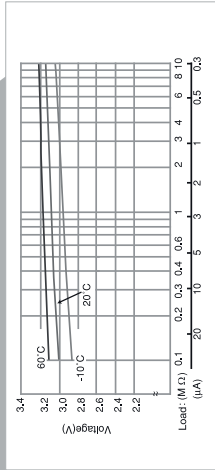

CAPACITY VS. LOAD RESISTANCE

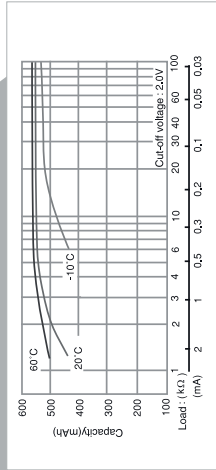


CR-2412




SPECIFICATIONS	
Name	CR-2412
Nominal voltage (V)	3
Nominal capacity (mAh)	100
Continuous drain (mA)	0.2
Operating temperature (°C)	-30 to +60
Weight (g)	2.0


DISCHARGE TEMPERATURE CHARACTERISTICS

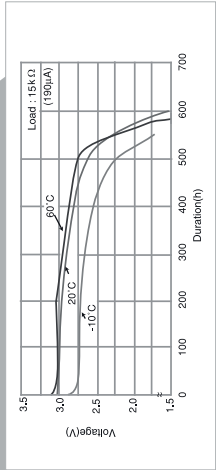


OPERATING VOLTAGE VS. DISCHARGE CURRENT*

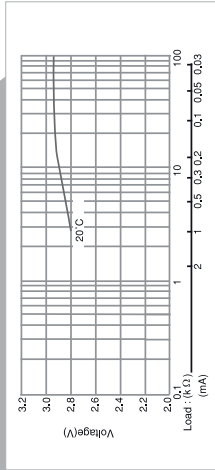

CAPACITY VS. LOAD RESISTANCE

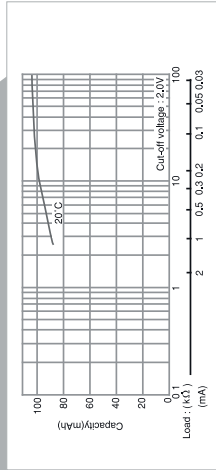


CR-2450




SPECIFICATIONS	
Name	CR-2450
Nominal voltage (V)	3
Nominal capacity (mAh)	620
Continuous drain (mA)	0.2
Operating temperature (°C)	-30 to +60
Weight (g)	6.3


DISCHARGE TEMPERATURE CHARACTERISTICS

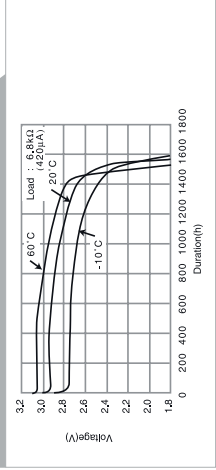


OPERATING VOLTAGE VS. DISCHARGE CURRENT*

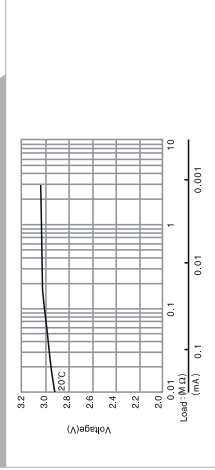

CAPACITY VS. LOAD RESISTANCE

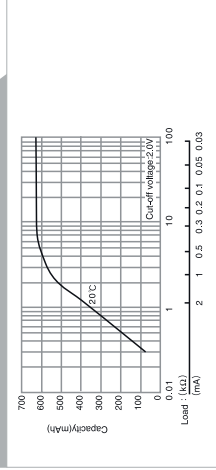


CR-2477




SPECIFICATIONS	
Name	CR-2477
Nominal voltage [V]	3
Nominal capacity [mAh]	1,000
Continuous drain [mA]	0.2
Operating temperature [°C]	-30 to +40
Weight [g]	10.5


DISCHARGE TEMPERATURE CHARACTERISTICS

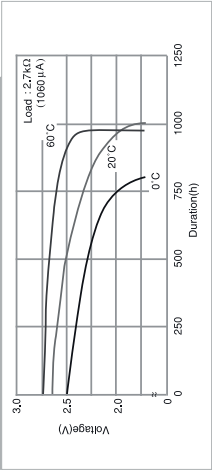


OPERATING VOLTAGE VS. DISCHARGE CURRENT*

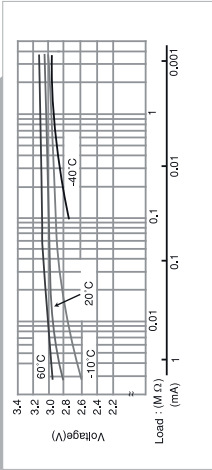

CAPACITY VS. LOAD RESISTANCE

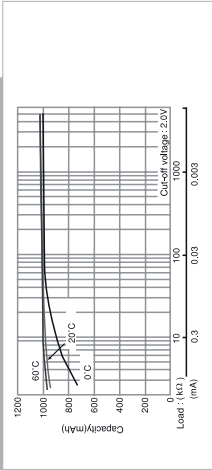


CR-3032




SPECIFICATIONS	
Name	CR-3032
Nominal voltage [V]	3
Nominal capacity [mAh]	500
Continuous drain [mA]	0.2
Operating temperature [°C]	-30 to +40
Weight [g]	6.8


DISCHARGE TEMPERATURE CHARACTERISTICS

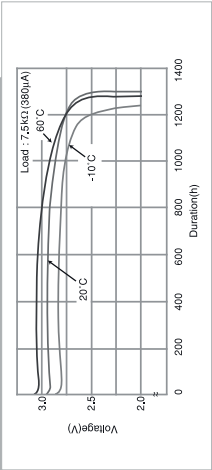

OPERATING VOLTAGE VS. DISCHARGE CURRENT*

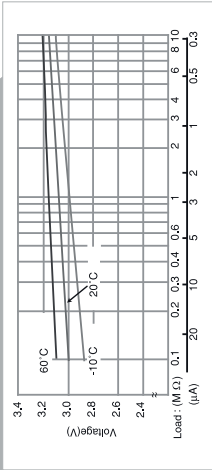

CAPACITY VS. LOAD RESISTANCE

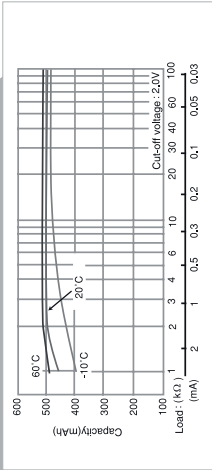

The data in this document are for descriptive purposes only and are not intended to make or imply any guarantee or warranty.
* Voltage at 50% discharge depth.