

## Basic Specifications

Voltage:	12 Volt
Capacity:	20 hour rate: 7.0Ah 10 hour rate: 6.84Ah 5 hour rate: 6.12Ah
Design life:	3-5 years
Appr. dimensions:	151x65x94/102mm (LxWxH) (±2mm)
Terminal:	Faston Tab 4.8mm T1
Container & lid:	Flame retardant ABS
Internal Resistance:	17mΩ (Fully charged)
Approximate weight:	2.2kg
Max charge current:	2.16A
Max discharge current:	105A (5 sec.)
Operating temp. range:	-20°C ~ +50°C
Self discharge:	lower than 3% per month

## Typical Applications

- Security systems / Emergency lighting
- UPS / Emergency Power
- Household appliances
- Traffic sensors
- Telecommunication
- Garden tools
- Toys

## Discharge data in Watts per battery (25°C)

	(V/cell)	5 Min	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
<b>End Voltage</b>	1.80V	282	191	151	77,6	50,3	19,9	15,2	8,39	4,23
	1.75V	294	199	155	81,5	51,8	20,9	15,5	8,51	4,31
	1.70V	306	206	159	84,6	53,2	21,7	15,7	8,59	4,37
	1.65V	317	213	164	86,4	54,5	22,3	15,9	8,66	4,42
	1.60V	326	219	168	87,5	55,4	22,8	16,1	8,72	4,46

## Discharge data in Amperes (25°C)

	(V/cell)	5 Min	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
<b>End Voltage</b>	1.80V	26,20	17,30	13,10	7,05	4,25	1,74	1,19	0,675	0,346
	1.75V	27,80	18,10	13,50	7,28	4,41	1,79	1,24	0,682	0,35
	1.70V	29,10	18,60	13,80	7,47	4,52	1,82	1,28	0,687	0,353
	1.65V	30,50	19,20	14,10	7,68	4,63	1,85	1,31	0,694	0,357
	1.60V	31,70	19,80	14,30	7,85	4,71	1,88	1,32	0,699	0,359

## General purpose batteries

With a range of well over 50 models, pbq offers one of the widest selections in the battery industry. The batteries are designed with the cost and quality conscious user in mind offering an excellent price/performance ratio. pbq has a full series of 6 and 12 Volt models available for a wide range of applications and intents to keep this range in production for many years to come. These General Purpose batteries have been designed for a functional life of 4-5 years at an operating temperature of 25°C in a standby application.

### VdS approved VRLA batteries

The VdS-approved pbq batteries form a special range that has been tested and qualified by the German VdS institute. The concept behind VdS recognition; ensuring tested and certified quality in the products and services being offered in the safety and security markets, is of equally advantageous for user and supplier.

### Flame Retardant ABS casing


All VdS models are accomplished in Flame Retardants ABS casing. Due to the right choice of the flame retardant, the batteries remain RoHS Compliant.

CONSULTING DISTRIBUTOR

**POHL** Electronic GmbH

Eduard-Maurer-Straße 11a • 16761 Hennigsdorf  
Tel. +49 3302 81893-0 • Fax +49 3302 81893-99  
www.pohl-electronic.de • info@pohl-electronic.de


### Design Life

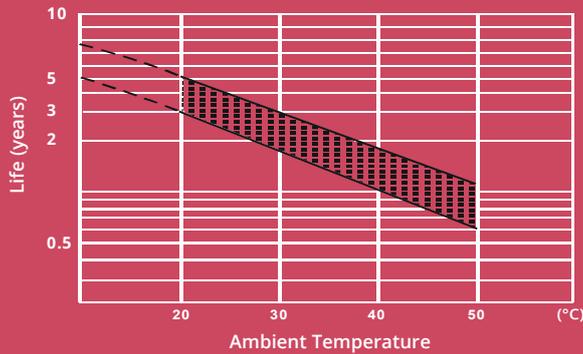


### Discharge time VS. discharge current (25C)



### Battery Charging Characteristics

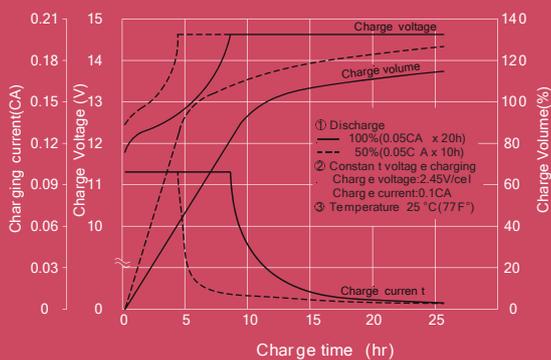

### Battery Charging Characteristics

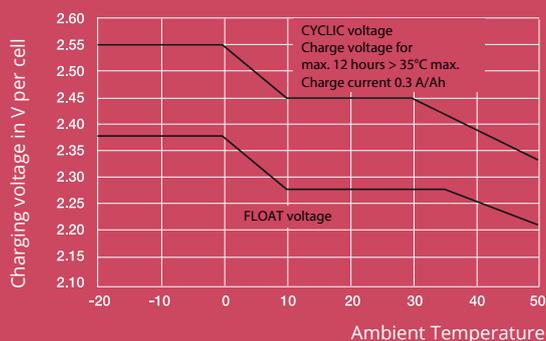

### Models available

Model pbq	Capacity in Ah	Dimensions (±2mm) (LxWxH1/H2)	Weight
pbq 3.5-4	3.5	91 x 35 x 64	0.46 kg
pbq 1.2-6	1.2	97 x 24 x 58	0.31 kg
pbq 3.2-6	3.2	134 x 35 x 67	0.71 kg
pbq 3.5-6	3.5	194 x 25 x 56	0.62 kg
pbq 4.5-6	4.5	70 x 47 x 107	0.75 kg
pbq 4.5-6 M	4.5	62 x 58 x 98	0.84 kg
pbq 7-6	7	151 x 34 x 100	1.2 kg
pbq 12-6	12	151 x 50 x 100	1.85 kg
pbq 0.8-12	0.8	96 x 25 x 62	0.4 kg
pbq 1.2-12*	1.2	97 x 43 x 58	0.54 kg
pbq 1.3-12	1.3	97 x 48 x 57	0.63 kg
pbq 2.3-12*	2.3	178 x 35 x 67	0.99 kg
pbq 2.3-12C	2.3	182 x 23 x 61	0.73 kg
pbq 2.6-12	2.6	178 x 34 x 71	0.92 kg
pbq 2.9-12	2.9	79 x 56 x 105	1.05 kg
pbq 3.2-12*	3.2	134 x 67 x 67	1.3 kg
pbq 3.4-12	3.4	134 x 67 x 67	1.3 kg
pbq 4-12	4	195 x 47 x 76	1.58 kg
pbq 5.2-12	5.2	90 x 70 x 107	1.65 kg
pbq 7-12*	7	151 x 65 x 102	2.2 kg
pbq 7-12L*	7	151 x 65 x 102	2.2 kg
pbq 12-12*	12	151 x 98 x 101	3.7 kg
pbq 18-12*	18	181 x 77 x 167	5.5 kg
pbq 26-12*	26	165 x 176 x 127	8.4 kg
pbq 28-12 T2	28	165 x 125 x 175	8.6 kg
pbq 40-12*	40	197 x 165 x 170	13.5 kg
pbq 65-12*	65	350 x 167 x 186	22 kg

\* VdS models

### Certificates



### Features

- Absorbent Glassmat Technology
- Low self discharge
- Classified as non-spillable and Non Dangerous goods by IATA, FAA, ADR, IMDG
- Can be discharged or stored in any position without leakage
- Cannot be charged while the terminal is downward.

CONSULTING DISTRIBUTOR



**POHL**

POHL Electronic GmbH  
Eduard-Maurer-Straße 11a • 16761 Hennigsdorf  
Tel. +49 3302 81893-0 • Fax +49 3302 81893-99  
www.pohl-electronic.de • info@pohl-electronic.de