

Voltage : 12 Volt  
Capacity : 15Ah  
Dimensions : 151x98x94/100mm (LxWxH)  
Terminal : Faston 250  
Container & lid : Flame retardant ABS  
Approximate weight : 4.2kg  
Certificate(s) : CE, UL  
RoHS Compliant : Yes

**Typical Applications:**



- Golf trolleys
- Agricultural trolleys
- Lifts & hoists
- Garden tools
- Lifting platforms
- Sensors
- UPS systems

**Capacity**  
30 minute rate (206W) : 103Wh  
15 minute rate (342W) : 85Wh  
5 minute rate (603W) : 50.25Wh

**Internal Resistance (fully charged)** : 11mOhm

**Capacity versus temperature**  
40°C : 102%  
25°C : 100%  
0°C : 85%  
-15°C : 65%

**Charge (constant voltage)**  
Initial Charging current <3,8A  
Float use: 13.5 - 13.8 Volt. -20mV/°C  
Cyclic use: 14.1 - 14.4 Volt. -30mV/°C

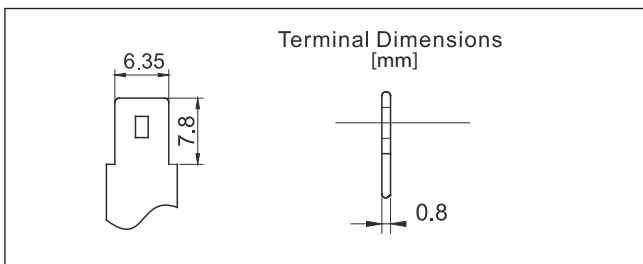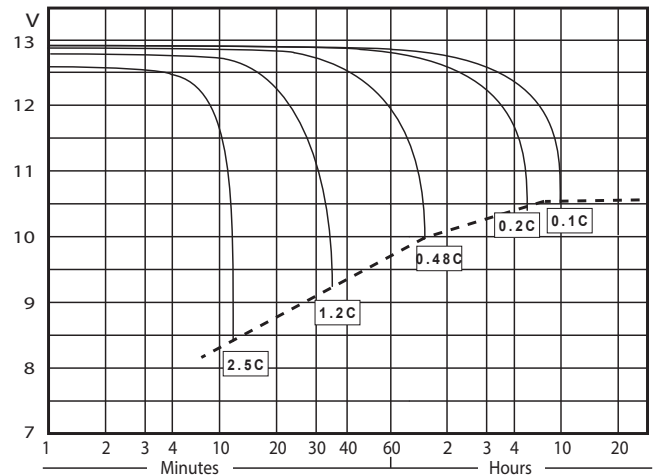

CONSULTING DISTRIBUTOR

**POHL** POHL Electronic GmbH  
Eduard-Maurer-Straße 11a • 16761 Hennigsdorf  
Tel. +49 3302 81893-0 • Fax +49 3302 81893-99  
www.pohl-electronic.de • info@pohl-electronic.de

Discharge data watt/battery

	Discharge time	5 min	10 min	15 min	20 min	30 min	45 min	60 min	90 min
End Voltage	10.8	500	367	288	252	180	130	103	79
	10.5	526	410	325	271	202	145	113	82
	10.2	552	420	334	276	206	150	118	86
	10.02	577	436	342	283	210	152	121	89
	9.60	603	451	350	288	215	158	124	92

## High Discharge Rate Batteries

The range of special High Discharge models offer excellent characteristics for applications that require very high discharge rates. Designed for a functional life of 4-5 years at 25°C in backup applications, these batteries are ideal for space limited applications requiring more power than can be delivered by a standard battery. For example, the 9Ah version has dimensions equal to those of a standard 7Ah but contains nearly 30% more energy.

The pbq 22HR-12 is a 22Ah battery especially designed for customer requiring a battery in the shape of a standard 18Ah but with increased capacity. Imagine the case where you change your computer system and find out that a controlled shutdown takes longer that your UPS is able to deliver! Just exchange the standard batteries with the pbq 22HR-12 and you instantly gain more backup time. Being able to deliver a 100A current during 5 minutes and even much higher start-up currents makes this battery also ideally suited as a stand-by power source for electric motors, cooling equipment etc.

The 15HR-12 is a very popular model for electric bikes and scooters since it is shaped like a standard 12Ah but offers 25% more capacity and is able to cope with the high inrush currents usually associated with electric motors. With an internal resistance of less than 12mOhm the voltage during discharge remains higher than when using standard 12Ah cyclic or stand-by, batteries. The compact form-factor ensures that this battery can be used as a direct replacement for standard 12Ah batteries.

In order to keep grid-corrosion and current per cm<sup>2</sup> at acceptable levels, the pbq HR Discharge batteries are constructed around a larger area for both positive and negative material. This is done by adding extra plates in the same volume. Rather than use electrolyte with a higher specific gravity, a method rejected by pbq since this will reduce the functional life of the batteries to unacceptable levels.

### Typical applications:

- UPS systems
- Wheel chairs, golf carts
- Electric bikes, scooters and other vehicles
- Tools
- (emergency) lights, pumps and valves

### Models available

Model pbq...	Capacity in Ah	Dimensions (LxWxH1/H2)	Weight
5.5HR-12	5,5	90x70x101/106mm	1,88kg
6.5HR-12	6,5	151x52x94/99mm	2,2kg
9HR-12	9,0	151x65x94/100mm	2,8kg
15HR-12	15,0	151x98x94/100mm	4,2kg
22HR-12	22,0	181x77x167mm	6,4kg
33HR-12	33,0	196x131x155/180mm	12kg
40HR-12	40,0	196x166x171mm	14,8kg
50HR-12	50,0	196x166x170mm	15,0kg
55HR-12	55,0	230x138x208/226mm	17,5kg



pbq 5.5HR-12

*Ideal substitute for wet starter batteries in scooters. Also frequently used for robotics and other high current applications.*



pbq 15HR-12

*High Rate Discharge version of the popular 12Ah VRLA battery. Electric bikes, scooters and UPS systems run 25% longer compared to a standard 12Ah.*



pbq 22HR-12

*High Rate Discharge version of the popular 18Ah VRLA battery. More power for your UPS systems without the need of extra shelves or cabinets.*