


New  
**BK-10V1S**  
 V size

CONSULTING DISTRIBUTOR


**POHL** Electronic GmbH  
 Eduard-Maier-Str. 11a • 16761 Hennigsdorf  
 Tel. +49 3302 81893-0 • Fax +49 3302 81893-99  
 www.pohl-electronic.de • info@pohl-electronic.de

Infrastructure type


**Dimensions (with Stud Bolts)**

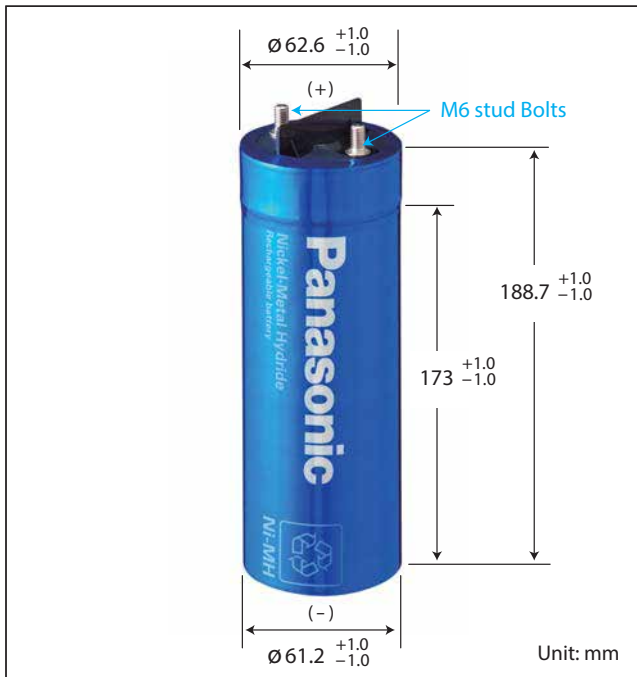

**Typical charge characteristics**

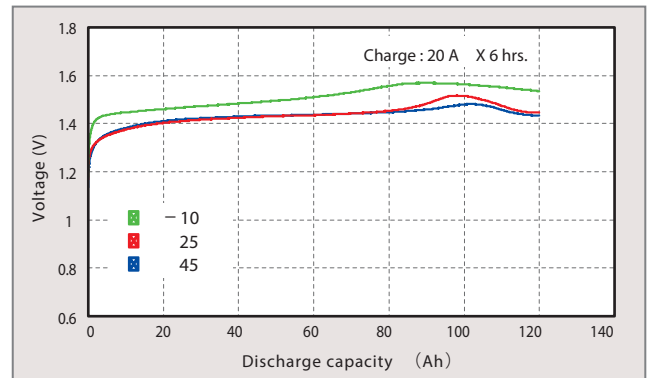

**Typical discharge characteristics**


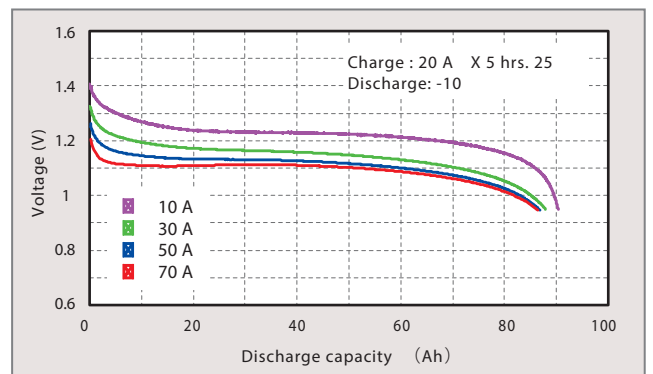


**Specifications**

Diameter	62.6 +1.0 / -1.0 mm
Height	188.7 +1.0 / -1.0 mm
Approximate Weight	1,700 g

Nominal Voltage		1.2 V	
Discharge <sup>*1</sup> Capacity	Average <sup>*2</sup>	95 Ah	
	Rated (min.)	90 Ah	
Approx. Internal impedance at 1000Hz at charged state.		1.6 m Ω	
Charge	Standard	10 A X 12 hrs.	
	Rapid <sup>*3</sup>	20 A X 5 hrs.	
Ambient Temperature	Charge	Standard Rapid	-20 to 55
	Discharge		
	Storage	<1 year	-20 to 35
<6 months		-20 to 45	
<12 hours		-20 to 55	

\*1 After charging at 0.1 It for 16 hours, discharging at 0.2 It.  
 \*2 For reference only.  
 \*3 Need specially designed control system. Please contact Panasonic for details.

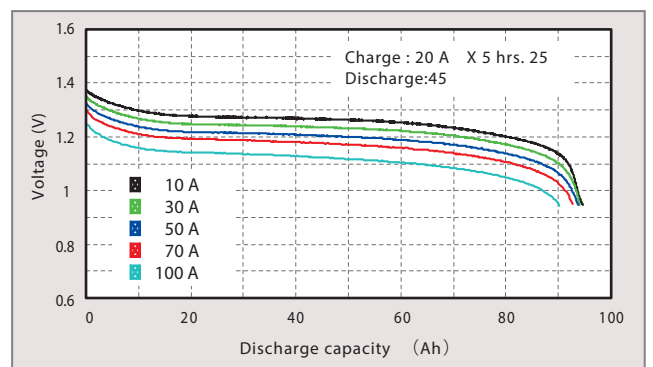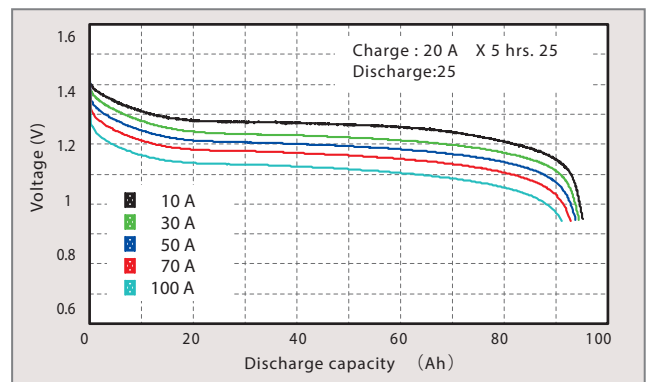

Battery performance and cycle life are strongly affected by how they are used. In order to maximize battery safety, please consult Panasonic when determining charge/discharge specs, warning label contents and unit design.

\*The data in this document are for descriptive purposes only and are not intended to make or imply any guarantee or warranty.