


New  
**BK110AAO**  
 AA size(HR15/5†)

Old  
 (HHR110AAO )

Standard type



Dimensions (with tube)

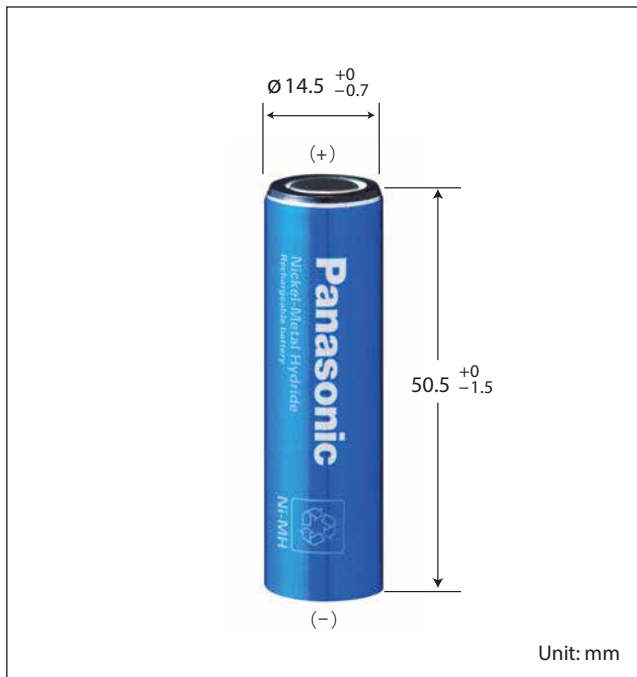

Specifications

Diameter	14.5 +0 / -0.7 mm
Height	50.5 +0 / -1.5 mm
Approximate Weight	26 g


Nominal Voltage	1.2 V	
Discharge Capacity	Average *1	1180 mAh
	Rated (min.) *2	1100 mAh
Approx. Internal impedance at 1000Hz at charged state.		16 mΩ

Charge	Standard	110 mA X 16 hrs.
	Rapid *3	1100 mA X 1.2 hrs.



Ambient Temperature	Charge	Standard	0 °C to 45 °C
		Rapid	0 to 40
	Discharge		-10 to 65
	Storage	<1 year	-20 to 35
		<6 months	-20 to 45
		<1 month	-20 to 55
		<1 week	-20 to 65

\*1 After charging at 0.1 It for 16 hours, discharging at 0.2 It.  
 \*2 For reference only.  
 \*3 Need specially designed control system. Please contact Panasonic for details.

Typical charge characteristics

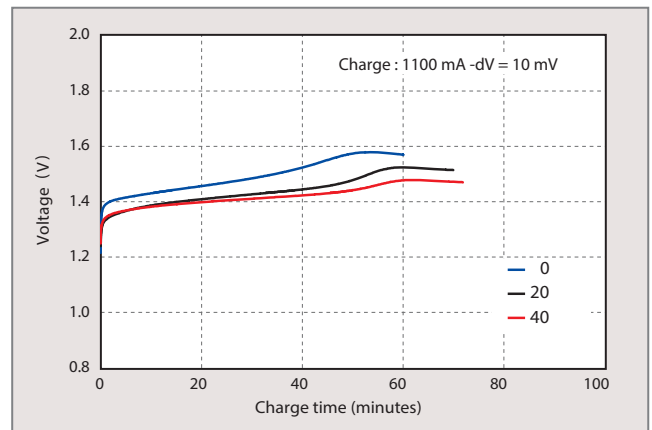

Typical discharge characteristics

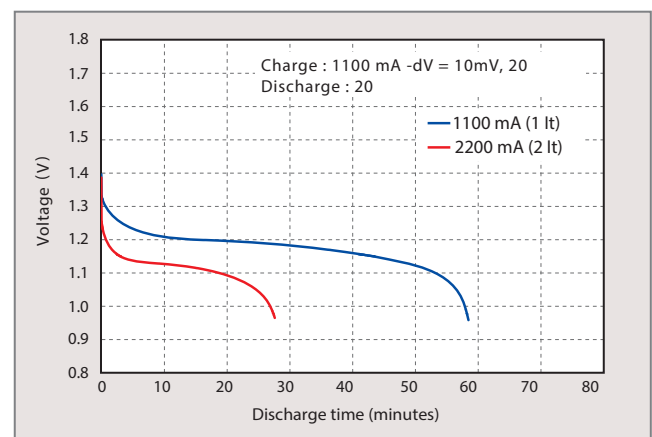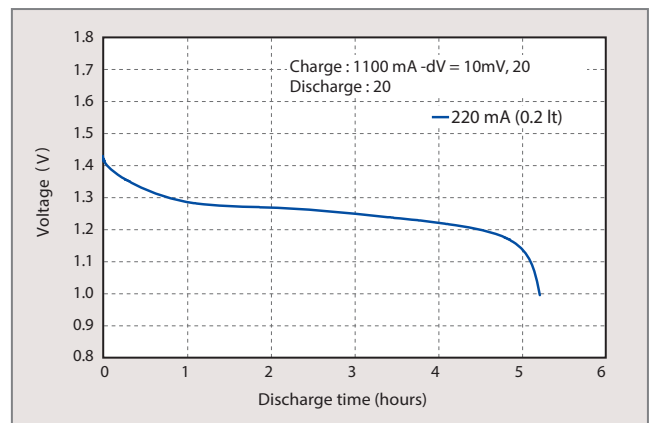

Battery performance and cycle life are strongly affected by how they are used. In order to maximize battery safety, please consult Panasonic when determining charge/discharge specs, warning label contents and unit design.

\*The data in this document are for descriptive purposes only and are not intended to make or imply any guarantee or warranty.

CONSULTING DISTRIBUTOR

**POHL** POHL Electronic GmbH  
 Eduard-Mauren-Straße 11a • 16761 Hennigsdorf  
 Tel. +49 3302 81893-0 • Fax +49 3302 81893-99  
 www.pohl-electronic.de • info@pohl-electronic.de