


# BK200AAB

AA size(HR15/51)

Button top type



## Dimensions (with tube)

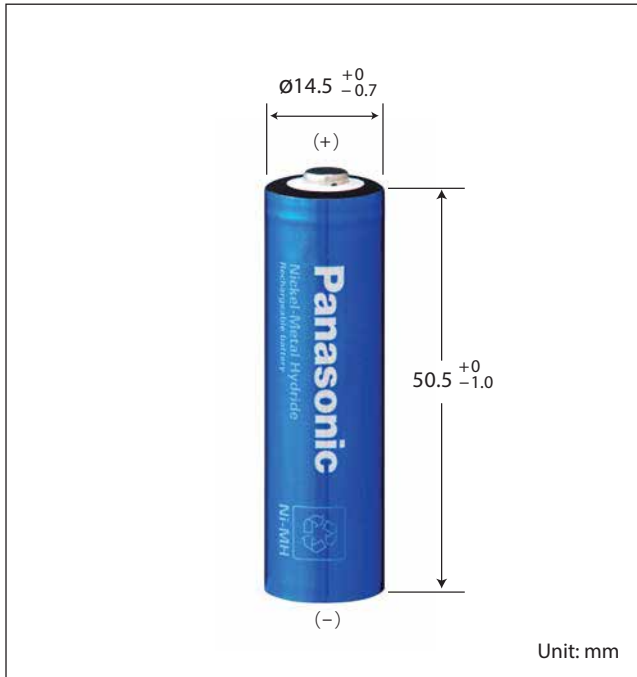

## Specifications

Diameter		14.5 +0 / -0.7 mm	
Height		50.5 +0 / -1.0 mm	
Approximate Weight		29 g	
Nominal Voltage		1.2 V	
Discharge Capacity	Average	2000 mAh	
	Rated (min.)	1900 mAh	
Approx. Internal impedance at 1000Hz at charged state.		25 mΩ	
Charge	Standard	190 mA X 16 hrs.	
	Rapid *3	1200 mA X 2.0 hrs.	
Ambient Temperature	Charge	Standard	0 °C to 45 °C
		Rapid	0 to 40
	Discharge		-10 to 65
	Storage	<1 year	-20 to 35
<6 months		-20 to 45	
<1 month		-20 to 55	
<1 week		-20 to 65	


\*1 After charging at 0.1 It for 16 hours, discharging at 0.2 It.

\*2 For reference only.



\*3 Need specially designed control system. Please contact Panasonic for details.

Battery performance and cycle life are strongly affected by how they are used. In order to maximize battery safety, please consult Panasonic when determining charge/discharge specs, warning label contents and unit design.

## Typical charge characteristics

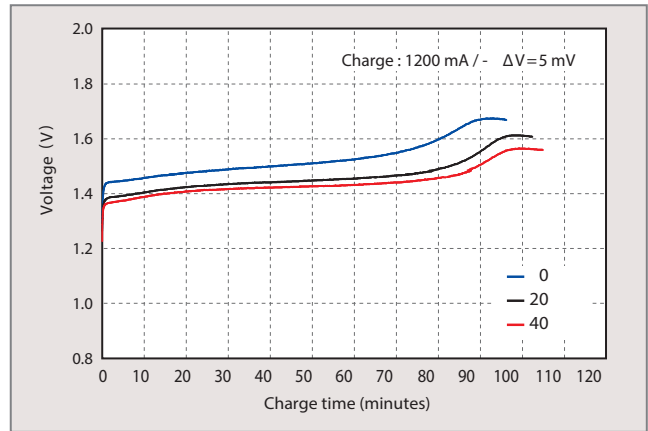

## Typical discharge characteristics

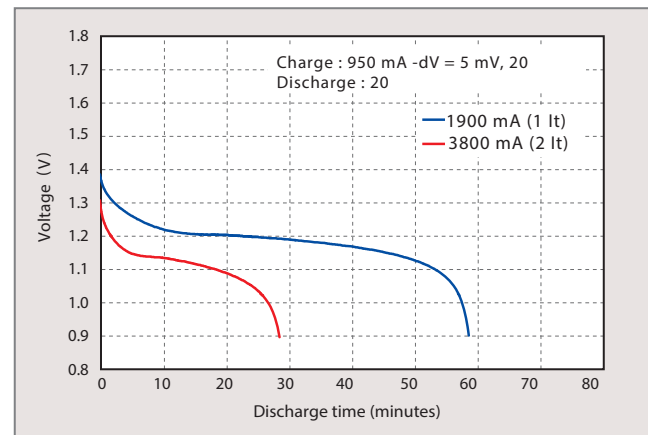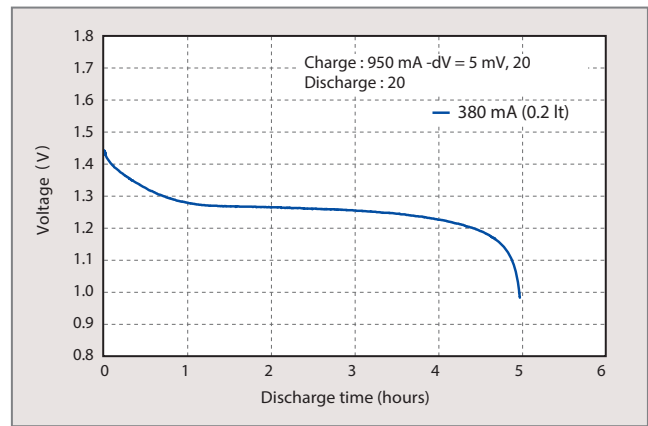

CONSULTING DISTRIBUTOR



**POHL**

POHL Electronic GmbH  
 Eduard-Maurens-Straße 11a • 16761 Hennigsdorf  
 Tel. +49 3302 81893-0 • Fax +49 3302 81893-99  
 www.pohl-electronic.de • info@pohl-electronic.de

\*The data in this document are for descriptive purposes only and are not intended to make or imply any guarantee or warranty.