


New  
**BK370AH**  
 LFat/A size

Old  
 (HHR370AH )

High temperature & long life type



Dimensions (with tube)

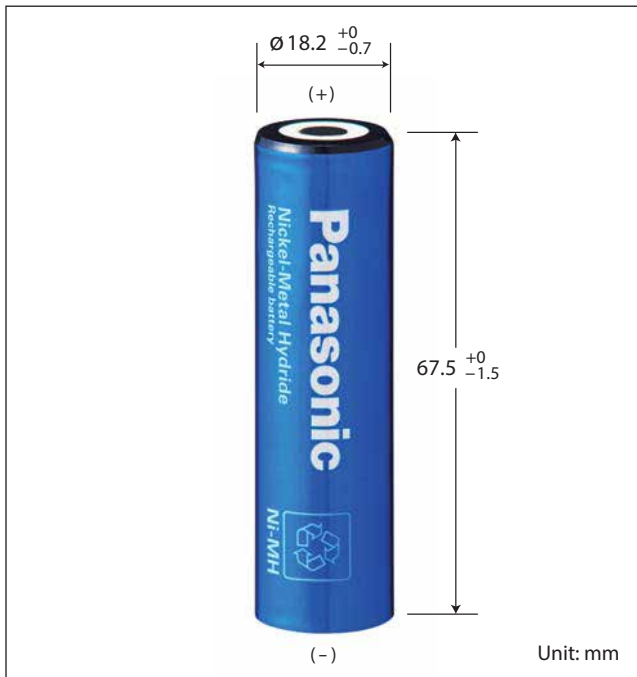

Specifications

Diameter	18.2 +0 / -0.7 mm
Height	67.5 +0 / -1.5 mm
Approximate Weight	60 g



Nominal Voltage	1.2 V	
Discharge Capacity	Average *1	3700 mAh
	Rated (min.)	3500 mAh
Approx. Internal impedance at 1000Hz at charged state.		20 mΩ

Ambient Temperature	Charge	Standard	350 mA X 16 hrs.	
		Rapid *3	3000 mA X 1.4 hrs.	
		Low rate	185 mA X 32 hrs. 123 mA X 48 hrs.	
	Charge	Standard	-10 to 60	
		Rapid	-10 to 60	
		Low rate	-10 to 45	
	Storage	Discharge		-10 to 60
		<1 year	<1 year	-20 to 35
			<6 months	-20 to 45
			<1 month	-20 to 55
<1 week			-20 to 65	


\*1 After charging at 0.1 It for 16 hours, discharging at 0.2 It.  
 \*2 For reference only.  
 \*3 Need specially designed control system. Please contact Panasonic for details.

Battery performance and cycle life are strongly affected by how they are used. In order to maximize battery safety, please consult Panasonic when determining charge/discharge specs, warning label contents and unit design.

Typical charge characteristics

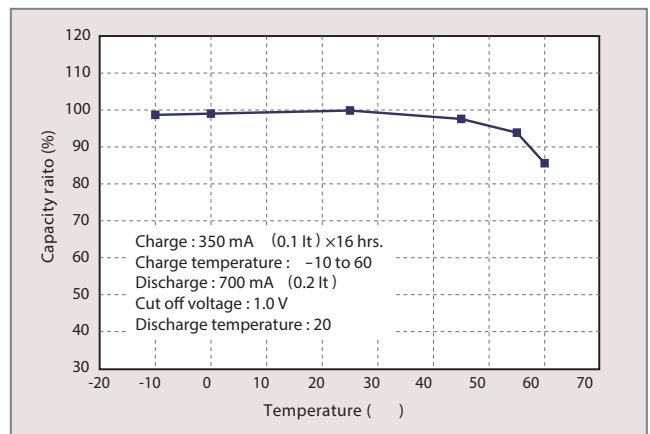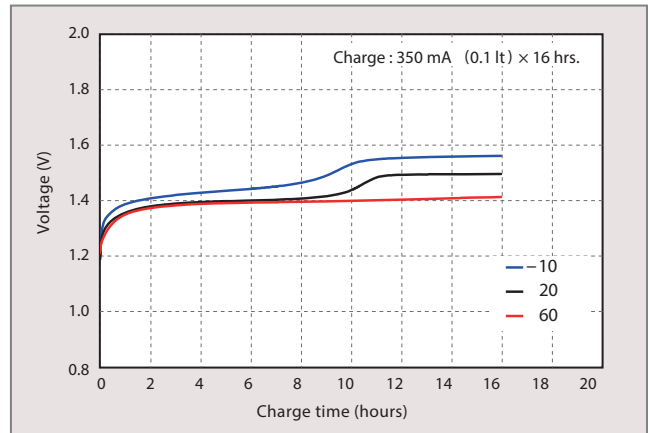

Typical discharge characteristics

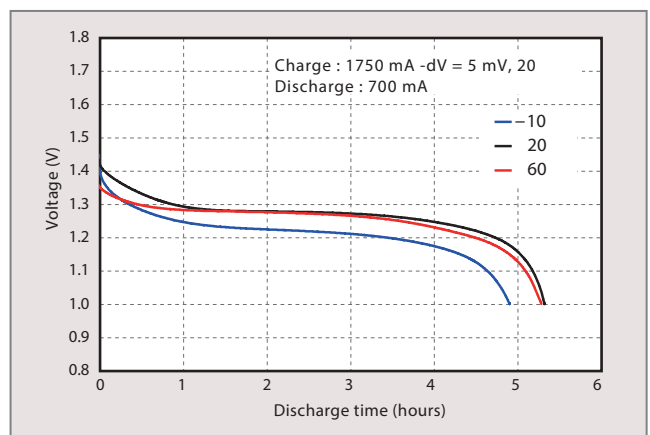

\*The data in this document are for descriptive purposes only and are not intended to make or imply any guarantee or warranty.

CONSULTING DISTRIBUTOR

**POHL** Electronic GmbH  
 Eduard-Mauren-Straße 11a • 16761 Hennigsdorf  
 Tel. +49 3302 81893-0 • Fax +49 3302 81893-99  
 www.pohl-electronic.de • info@pohl-electronic.de