

BK380A


LA size(HR17/67)

Old
(HHR380A)


Standard type

N type


Dimensions (with tube)

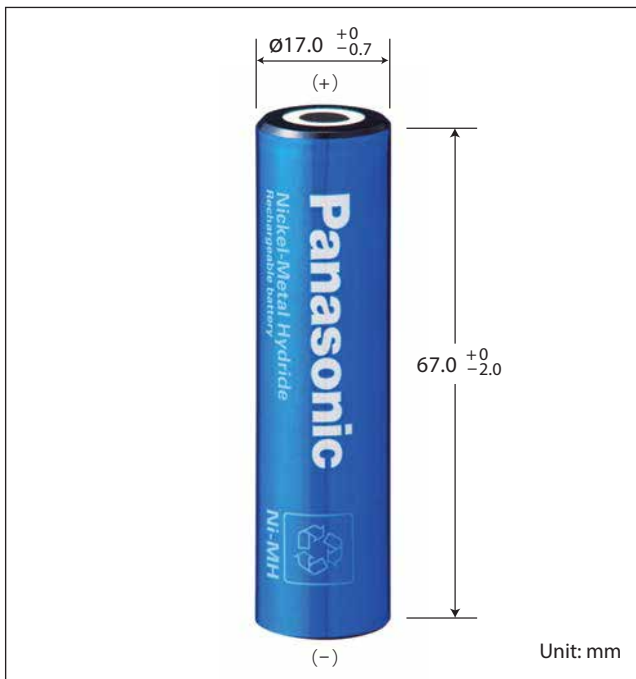

Typical charge characteristics

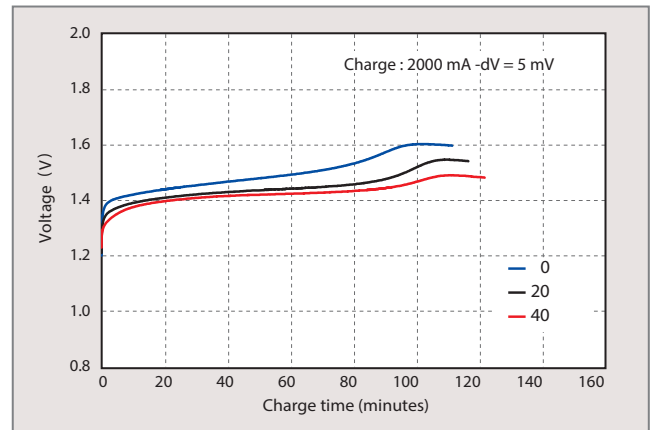


Typical discharge characteristics

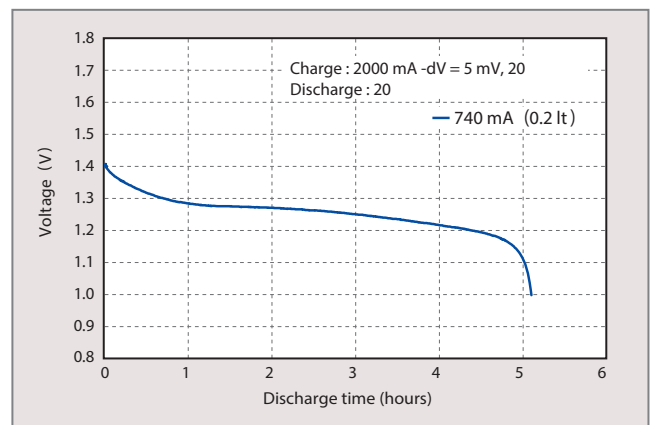

Specifications

Diameter		17.0 +0 / -0.7 mm	
Height		67.0 +0 / -2.0 mm	
Approximate Weight		53 g	
Nominal Voltage		1.2 V	
Discharge Capacity	Average *1	3800 mAh	
	Rated (min.) *2	3700 mAh	
Approx. Internal impedance at 1000Hz at charged state.		25 mΩ	
Charge	Standard	370 mA X 16 hrs.	
	Rapid *3	2000 mA	
Ambient Temperature	Charge	Standard	0 °C to 45 °C
		Rapid	0 to 40
	Discharge		-10 to 65
	Storage	<1 year	-20 to 35
<6 months		-20 to 45	
<1 month		-20 to 55	
<1 week		-20 to 65	

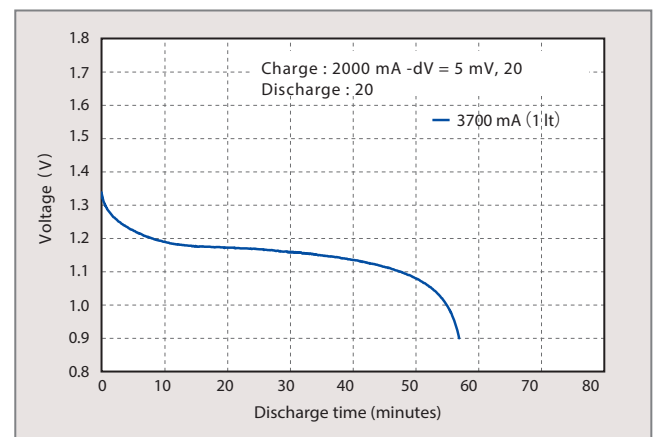

*1 After charging at 0.1 It for 16 hours, discharging at 0.2 It.
 *2 For reference only.
 *3 Need specially designed control system. Please contact Panasonic for details.

Battery performance and cycle life are strongly affected by how they are used. In order to maximize battery safety, please consult Panasonic when determining charge/discharge specs, warning label contents and unit design.

— CONSULTING DISTRIBUTOR —

POHL Electronic GmbH
 Eduard-Maurel-Straße 11a • 16761 Hennigsdorf
 Tel. +49 3302 81893-0 • Fax +49 3302 81893-99
 www.pohl-electronic.de • info@pohl-electronic.de

*The data in this document are for descriptive purposes only and are not intended to make or imply any guarantee or warranty.