


New  
**BK70AAAJ**  
 AAA size(HR11/45)

Old  
 (HHR70AAAJ )

Standard type



Dimensions (with tube)

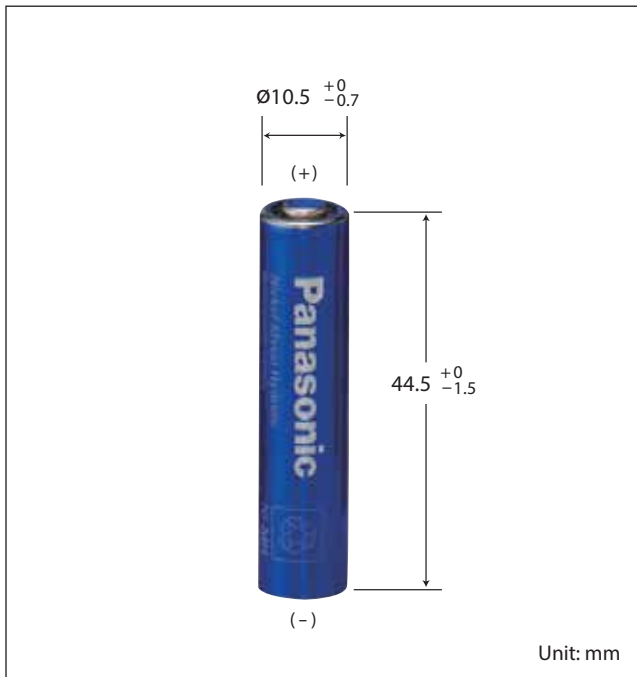


Specifications



Diameter		10.5 +0 / -0.7 mm	
Height		44.5 +0 / -1.5 mm	
Approximate Weight		12 g	
Nominal Voltage		1.2 V	
Discharge Capacity	Average	730 mAh	
	Rated (min.)	700 mAh	
Approx. Internal impedance at 1000Hz at charged state.		35 mΩ	
Charge	Standard	70 mA X 16 hrs.	
	Rapid	650 mA X 1.2 hrs.	
Ambient Temperature	Charge	Standard	0 °C to 45 °C
		Rapid	0 to 40
	Discharge		-10 to 65
	Storage	<1 year	-20 to 35
<6 months		-20 to 45	
<1 month		-20 to 55	
<1 week		-20 to 65	

\*1 After charging at 0.1 It for 16 hours, discharging at 0.2 It.  
 \*2 For reference only.  
 \*3 Need specially designed control system. Please contact Panasonic for details.

Typical charge characteristics

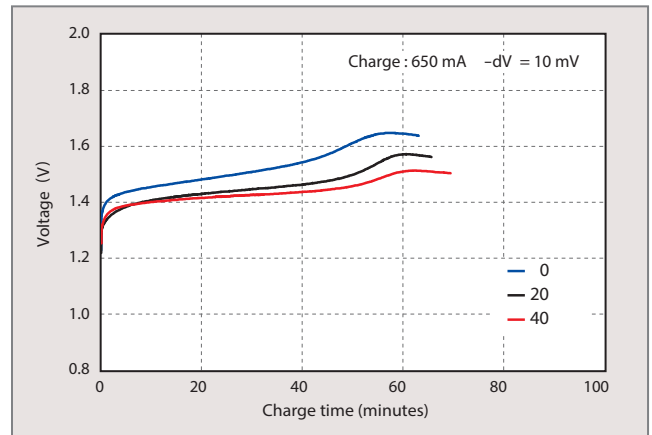

Typical discharge characteristics

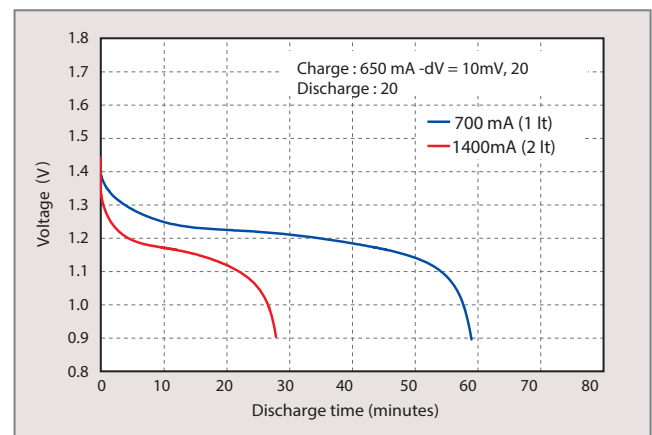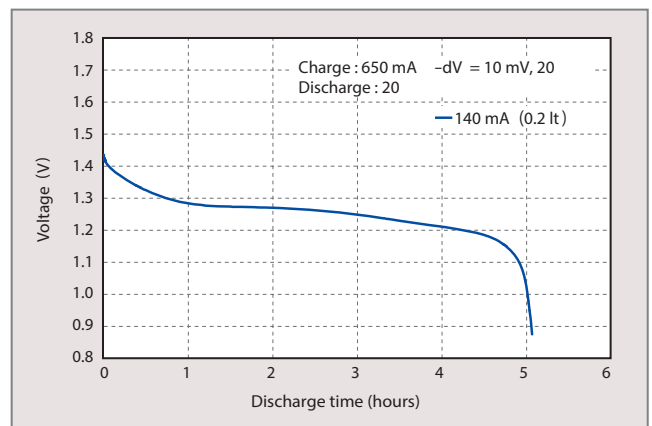

Battery performance and cycle life are strongly affected by how they are used. In order to maximize battery safety, please consult Panasonic when determining charge/discharge specs, warning label contents and unit design.

\*The data in this document are for descriptive purposes only and are not intended to make or imply any guarantee or warranty.

CONSULTING DISTRIBUTOR

**POHL** Electronic GmbH  
 Eduard-Mauren-Straße 11a • 16761 Hennigsdorf  
 Tel. +49 3302 81893-0 • Fax +49 3302 81893-99  
 www.pohl-electronic.de • info@pohl-electronic.de