


New
BK70AAH
AA size(HR 15/49)

Old
(HHR70AAH)

High temperature & long life type

H type

Dimensions (with tube)

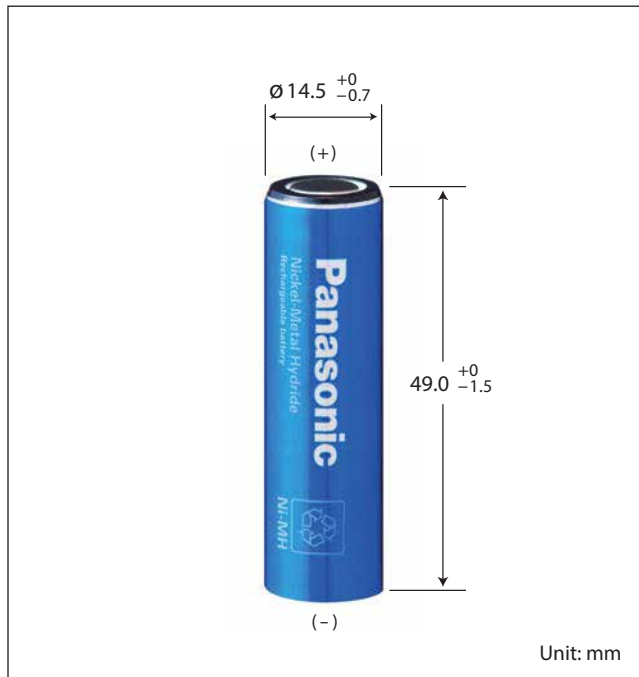

Specifications

Diameter		14.5 +0 / -0.7 mm	
Height		49.0 +0 / -1.5 mm	
Approximate Weight		18 g	
Nominal Voltage		1.2V	
Discharge ^{*1} Capacity	Average ^{*2}	750 mAh	
	Rated (min.)	700 mAh	
Approx. Internal impedance at 1000Hz at charged state.		25 m Ω	
Charge	Standard	70 mA X 16 hrs.	
	Rapid ^{*3}	350 mA X 2.4 hrs.	
	Low rate	35 mA X 32 hrs. 23 mA X 48 hrs.	
Ambient Temperature	Charge	Standard	- 10 to 60
		Rapid	
		Low rate	- 10 to 45
	Discharge		- 10 to 60
	Storage	<1 year	-20 to 35
		<6 months	-20 to 45
		<1 month	-20 to 55
		<1 week	-20 to 65



*1 After charging at 0.1 It for 16 hours, discharging at 0.2 It.

*2 For reference only.


*3 Need specially designed control system. Please contact Panasonic for details.

Battery performance and cycle life are strongly affected by how they are used. In order to maximize battery safety, please consult Panasonic when determining charge/discharge specs, warning label contents and unit design.

Typical charge characteristics

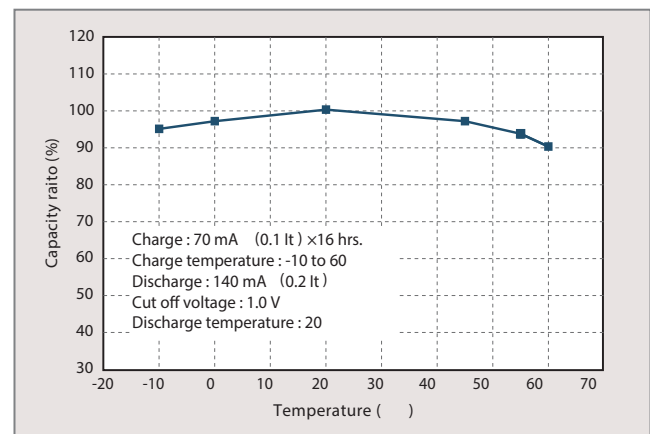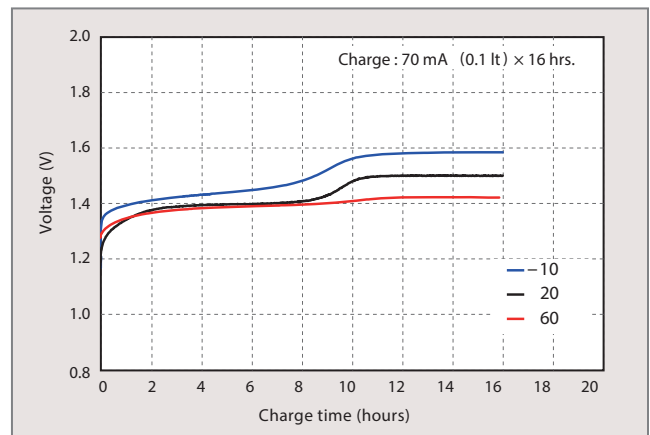

Typical discharge characteristics

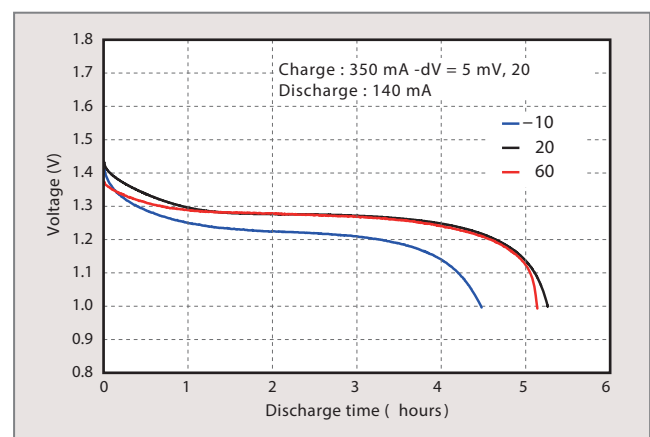

CONSULTING DISTRIBUTOR



POHL

POHL Electronic GmbH
Eduard-Maurel-Straße 11a • 16761 Hennigsdorf
Tel. +49 3302 81893-0 • Fax +49 3302 81893-99
www.pohl-electronic.de • info@pohl-electronic.de

*The data in this document are for descriptive purposes only and are not intended to make or imply any guarantee or warranty.