



POLY-CARBONMONOFLUORIDE LITHIUM BATTERIES (BR SERIES)

BR-425

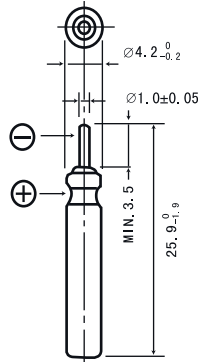

BR-435

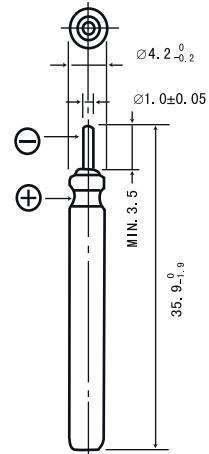


SPECIFICATIONS

Name	BR-425
Nominal voltage (V)	3
Nominal capacity (mAh)	25
Continuous drain (mA)	0.5
Operating temperature (°C)	-30 to +80
Weight (g)	0.6


SPECIFICATIONS

Name	BR-435
Nominal voltage (V)	3
Nominal capacity (mAh)	50
Continuous drain (mA)	1.0
Operating temperature (°C)	-30 to +80
Weight (g)	0.9


DISCHARGE TEMPERATURE CHARACTERISTICS

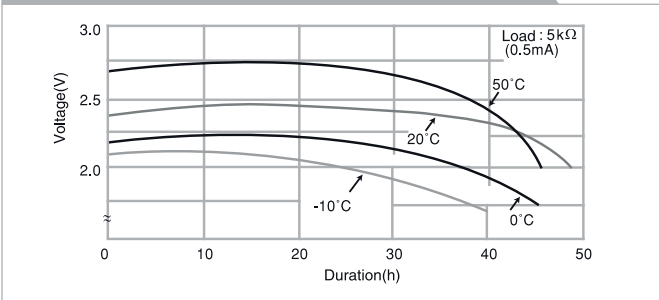


DISCHARGE TEMPERATURE CHARACTERISTICS

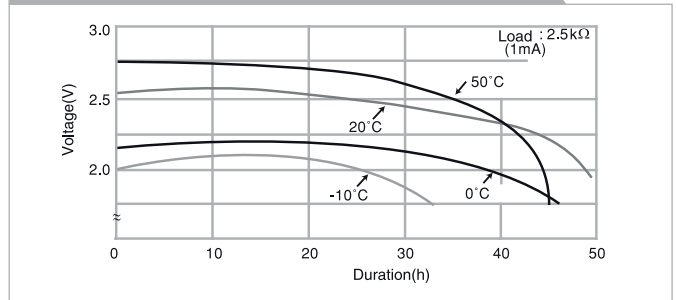


OPERATING VOLTAGE VS. DISCHARGE CURRENT*

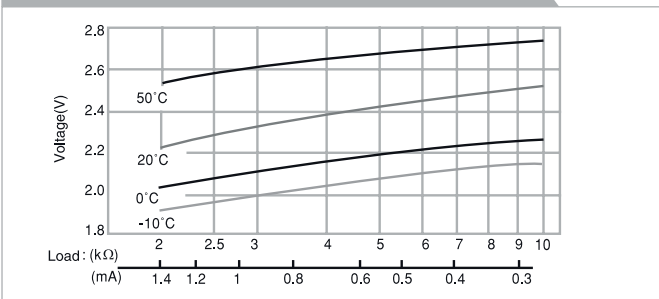


OPERATING VOLTAGE VS. DISCHARGE CURRENT*

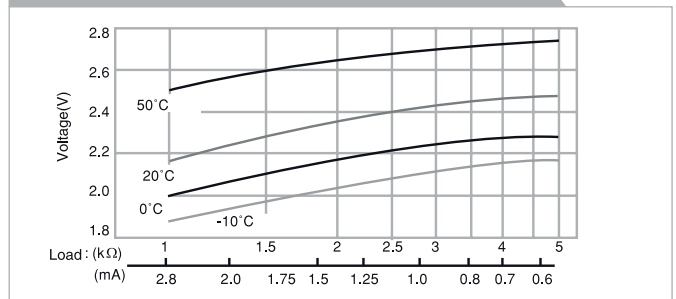

CAPACITY VS. LOAD RESISTANCE

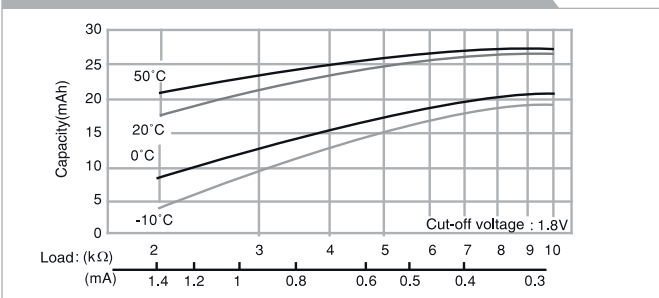

CAPACITY VS. LOAD RESISTANCE

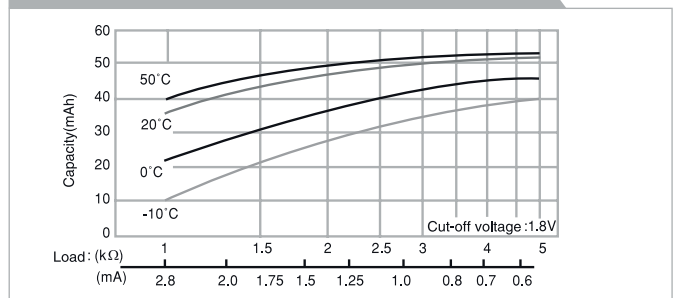

The data in this document are for descriptive purposes only and are not intended to make or imply any guarantee or warranty.

* Voltage at 50% discharge depth.