



CONSULTING DISTRIBUTOR
POHL

POHL Electronic GmbH
Eduard-Maurel-Straße 11a • 16761 Hennigsdorf
Tel. +49 3302 81893-0 • Fax +49 3302 81893-99
www.pohl-electronic.de • info@pohl-electronic.de

Panasonic

Lithium Ion NCA623535

Features & Benefits

- High energy density
- Long, stable power and long run time
- Ideal for portable communications, portable computing, DSC and Camcorder.


* At temperatures below 10 °C, charge at a 0.40C rate.

Specifications

Rated capacity ⁽¹⁾	Min. 1025mAh
Capacity ⁽²⁾	Min. 1050mAh Typ. 1100mAh
Nominal voltage	3.6V
Charging	CC-CV, Std. 735mA, 4.20V, 4.0 hrs
Weight (max.)	17.6g
Temperature	Charge*: 0 to +45°C Discharge: -20 to +60°C Storage: -20 to +50°C
Energy density	Volumetric: 474 Wh/l Gravimetric: 210 Wh/kg


⁽¹⁾ At 20°C ⁽²⁾ At 25°C

Dimensions

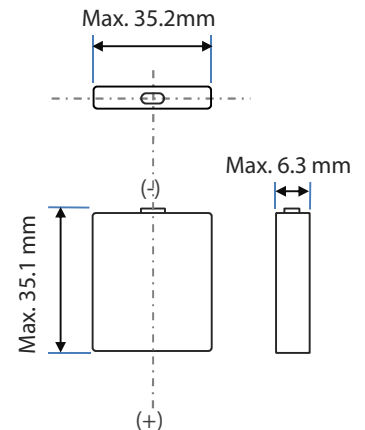


For Reference Only


Charge Characteristics

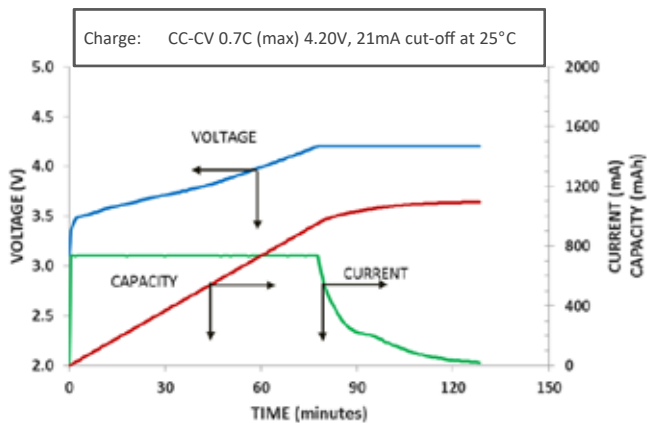


Cycle Life Characteristics

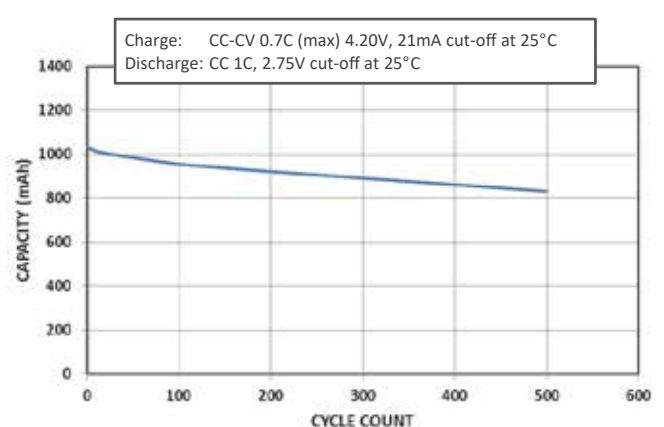

Discharge Characteristics (by temperature)

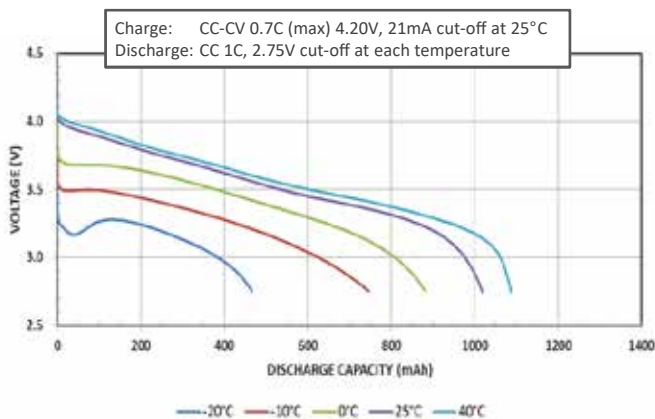

Discharge Characteristics (by rate of discharge)

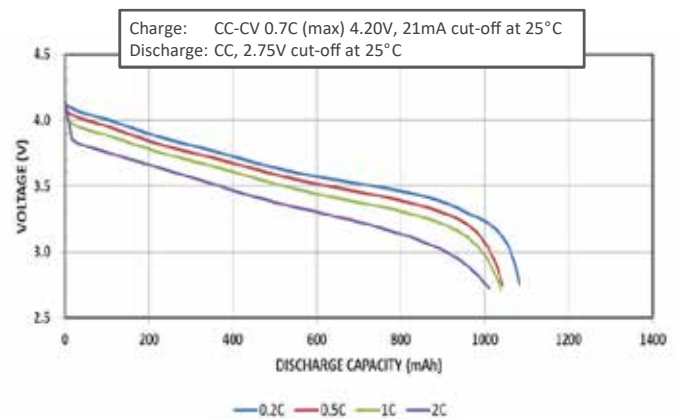

The data in this document is for descriptive purposes only and is not intended to make or imply any guarantee or warranty.