



Panasonic

Lithium Ion NCA673440

Features & Benefits

- High energy density
- Long, stable power and long run time
- Ideal for portable communications, portable computing, DSC and Camcorder.


* At temperatures below 10 °C, charge at a 0.35C rate.

Specifications

Rated capacity ⁽¹⁾	Min. 1200mAh
Capacity ⁽²⁾	Min. 1220mAh Typ. 1265mAh
Nominal voltage	3.6V
Charging	CC-CV, Std. 854mA, 4.20V, 4.0 hrs
Weight (max.)	20.3g
Temperature	Charge*: 0 to +45°C Discharge: -20 to +60°C Storage: -20 to +50°C
Energy density	Volumetric: 469 Wh/l Gravimetric: 213 Wh/kg


⁽¹⁾ At 20°C ⁽²⁾ At 25°C

Dimensions

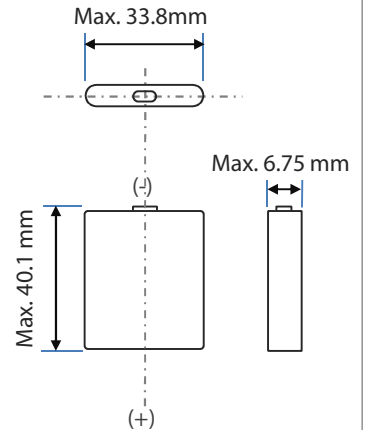


For Reference Only


Charge Characteristics

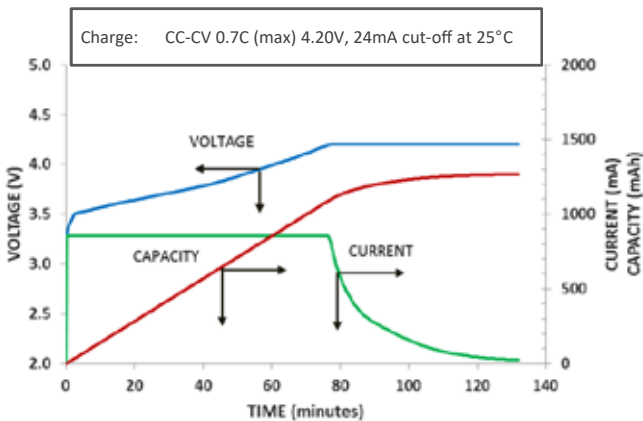


Cycle Life Characteristics

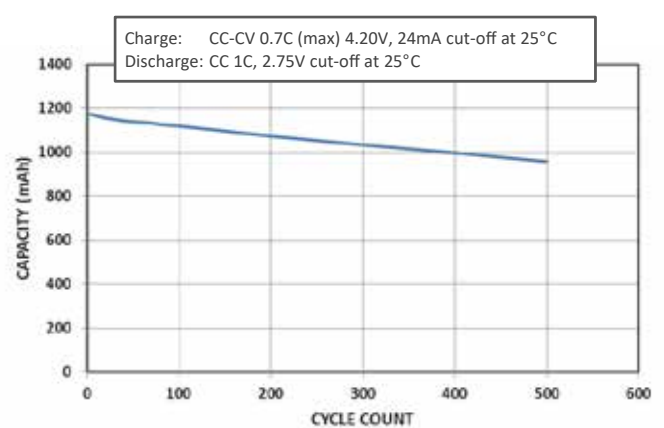

Discharge Characteristics (by temperature)

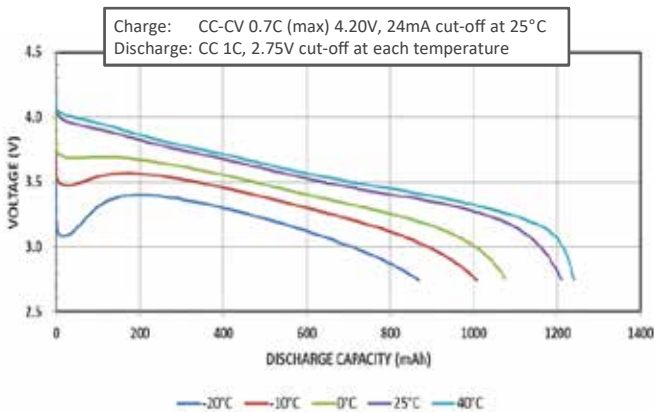

Discharge Characteristics (by rate of discharge)

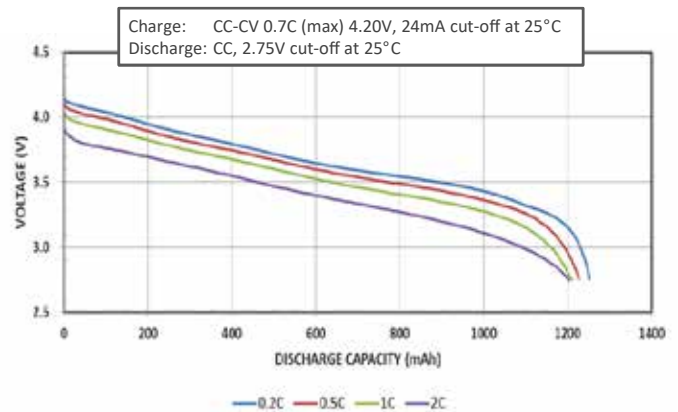

The data in this document is for descriptive purposes only and is not intended to make or imply any guarantee or warranty.