



MICROLYTE 6/12 MP SERIES

Sealed Maintenance Free Rechargeable Battery



The SEC Microlyte MP series of VRLA AGM monoblocs is a classic top terminal range, designed for when a cost effective but reliable solution is required. It has been engineered with lead calcium plates to offer competitive battery solutions combining superior gas recombination technology and great energy density. Reliable, versatile and maintenance free – it is difficult to beat!



SEC 12-MP-18

G 116071

DESIGN LIFE

8 Years in Float Service at 25°C
200 Cycles @ 80% DoD at 25°C

MANUFACTURED TO

BS 6290 Part 4 (with V0 option)
IEC 60896-21/22-2004
Eurobat / VdS
UL Component approval
ISO 9001:2008
ISO 14001:2004

DESIGN SPECIFICATIONS


Float charge voltage
Cyclic charge voltage
Terminal

2.25-2.30 vpc ±1% at 25°C
2.40-2.50 vpc ±1% at 25°C
Ft2

CHARACTERISTICS

Model		SEC-12-MP-18
Nominal voltage		12 Volt
Nominal Capacity C/10 at 25°C		17.0Ah
Capacity	20hr	18.0 Ah to 1.75 vpc
	10hr	17.0 Ah to 1.75 vpc
	5hr	15.3 Ah to 1.75 vpc
	3hr	13.5 Ah to 1.75 vpc
	1hr	9.90 Ah to 1.75 vpc
Maximum charging current		3.06 Amp
Max. discharge current in 5 sec.		250 Amp
Internal resistance		15~25 mΩ*
Charging voltage	Standby use	13.5 - 13.8 VDC at 25°C
	Cyclic use	14.4 - 15.0 VDC at 25°C
Battery dimension	Length	181 mm
	Width	77.0 mm
	Overall height	167 mm
	Weight	5.00 kg


Actual Battery dimensions may be +/- 5% of the number shown
*For QQC standard

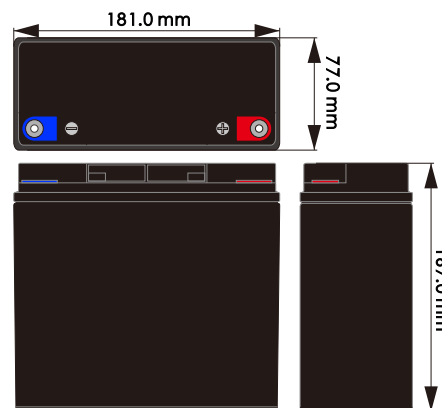

APPLICATIONS

UPS Systems/ Telecommunication PABX/ Emergency Lighting/ Fire & Security Alarms System/ Portable VTR/TV / Power Tools/ Computer/ Fans/ Electronics torch/ Window washer

TERMINAL TYPE (FT2)

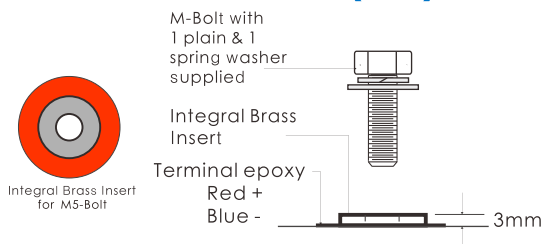

Current

Amps at 25°C

SEC bloc type	End volts /Cell	Discharge amps at 25°C																
		Discharge time in minutes						End Volts /Cell	Discharge time in hours									
		5min	10min	15min	20min	30min	45min		1hr	1.5hr	2hr	3hr	4hr	5hr	6hr	8hr	10hr	20hr
12-MP-18	1.80	57.4	36.2	23.7	23.2	15.8	12.1	1.85	9.48	7.13	6.04	4.24	3.49	2.82	2.49	1.92	1.64	0.88
	1.75	60.8	38.4	25.8	24.5	17.0	12.6	1.80	9.79	7.35	6.67	4.36	3.60	2.96	2.57	1.98	1.67	0.89
	1.67	63.6	40.1	27.2	25.3	17.2	13.1	1.75	9.90	7.66	6.28	4.50	3.69	3.06	2.63	2.06	1.70	0.90

Power

Watts/cell at 25°C

SEC bloc type	End volts /Cell	Discharge watts/cell at 25°C																
		Discharge time in minutes						End Volts /Cell	Discharge time in hours									
		5min	10min	15min	20min	30min	45min		1hr	1.5hr	2hr	3hr	4hr	5hr	6hr	8hr	10hr	20hr
12-MP-18	1.80	106	61.7	45.0	44.1	30.2	23.2	1.85	17.9	13.5	11.5	8.34	6.88	5.67	4.77	3.67	3.13	1.74
	1.75	113	68.2	46.3	46.5	30.8	23.7	1.80	18.2	14.0	11.7	8.60	6.92	5.84	4.99	3.81	3.22	1.76
	1.67	118	72.2	47.6	48.2	31.0	24.0	1.75	18.5	14.4	11.9	8.63	7.13	5.94	5.13	4.04	3.35	1.78

Actual Battery data may be +/- 5% of the number shown




MICROLYTE 6/12 MP SERIES
 Sealed Maintenance Free Rechargeable Battery




SEC 12-MP-18


DISCHARGE CHARACTERISTICS (25°C)

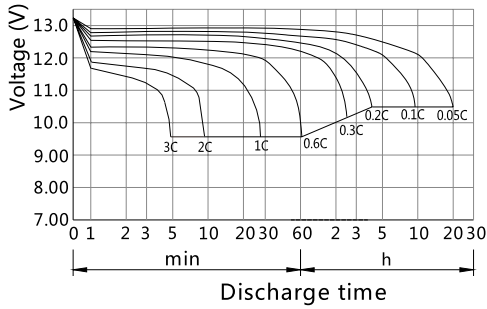


CHARGING CHARACTERISTICS (25°C)

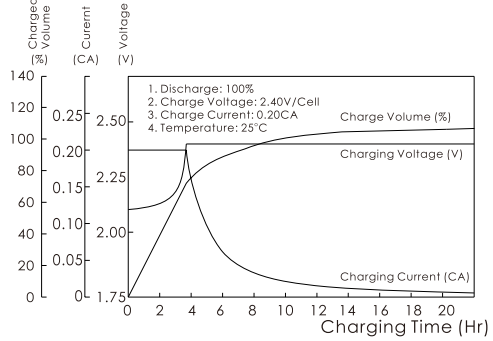


EFFECT OF TEMPERATURE ON CAPACITY

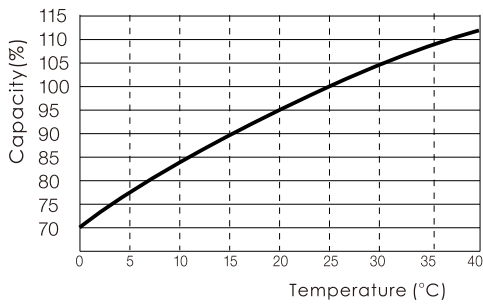


SELF-DISCHARGE CHARACTERISTICS

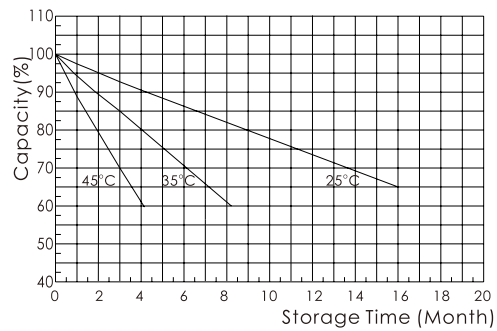


THE RELATIONSHIP FOR OPEN CIRCUIT VOLTAGE AND RESIDUAL CAPACITY (25°C)

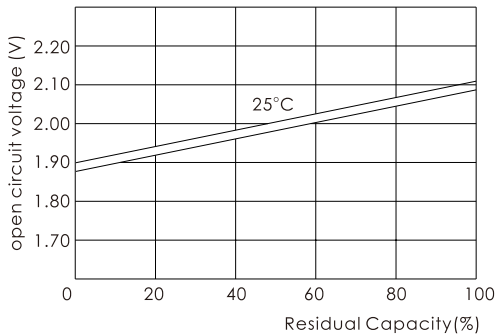

THE RELATIONSHIP FOR CHARGING VOLTAGE AND TEMPERATURE

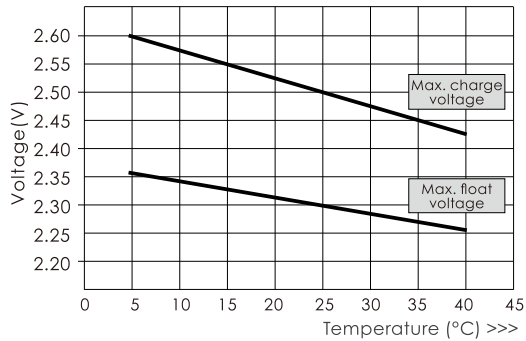

FLOATING LIFE ON TEMPERATURE

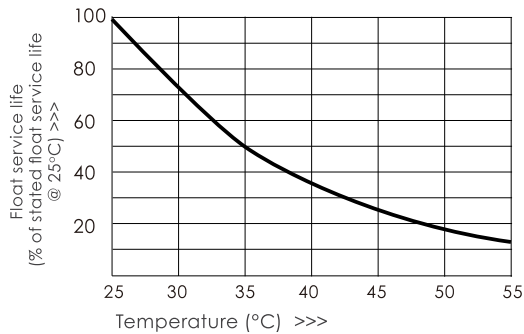

CYCLE LIFE ON D.O.D. (25°C)

