



CONSULTING DISTRIBUTOR



**POHL** Electronic GmbH  
Eduard-Maurer-Straße 11a • 16761 Hennigsdorf  
Tel. +49 3302 81893-0 • Fax +49 3302 81893-99  
www.pohl-electronic.de • info@pohl-electronic.de

## Basic Specifications

Voltage:	12 Volt
Capacity:	20 hour rate: 68.2Ah 10 hour rate: 65Ah 5 hour rate: 56.5Ah
Design life:	10 years
Appr. dimensions:	350x167x179mm (LxWxH) (±2mm)
Terminal:	M6
Container & lid:	Flame retardant ABS
Internal Resistance:	6mΩ (Fully charged)
Approximate weight:	22.5kg
Max charge current:	19.5A
Max discharge current:	650A (5 sec.)
Operating temp. range:	-20°C ~ +50°C
Self discharge:	lower than 3% per month

## Typical Applications

- UPS / Emergency Power
- Evacuation system
- Security systems
- Traffic systems
- Data center
- Telecommunication
- Hospitals

## Discharge data in Watts (25°C)

	(V/cell)	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
End Voltage	1.80V	1201	992	638	419	185	130	77,6	41
	1.75V	1273	1048	663	432	191	134	78,2	41,2
	1.70V	1330	1085	679	441	192	135	78,6	41,5
	1.65V	1387	1126	700	453	194	136	78,9	41,6
	1.60V	1430	1154	715	459	195	137	79	41,7

## Discharge data in Amperes (25°C)

	(V/cell)	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
End Voltage	1.80V	111	90,4	56,9	36,8	15,8	11	6,5	3,41
	1.75V	118	95,4	59	37,9	16,3	11,4	6,55	3,44
	1.70V	123	98,8	60,5	38,7	16,4	11,5	6,58	3,46
	1.65V	128	103	62,4	39,7	16,5	11,5	6,60	3,47
	1.60V	132	105	63,7	40,3	16,6	11,6	6,62	3,47

## Long Life series


These VRLA batteries use thicker plates than the standard 4-5 year models. The electrolyte is absorbed by the AGM separators and plates and therefore these batteries can be mounted in any position. The one-way valve allow gases to escape, avoiding excessive pressure build-up in the case of accidentally overcharge.

The pbq Long Life series: a range of standard shaped Long Life batteries with a functional life of 10-years for standby applications in accordance to the EUROBAT "High Performance" specifications.


### General Features of the pbq Long Life series

- Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99% and freedom.
- from electrolyte maintenance or water adding.
- Not restricted for air transport-complies with IATA/ICAO Special Provision A67
- Can be mounted in any position
- Computer designed lead, calcium tin alloy grid for high power density
- Long service life, float or cyclic applications. Maintenance free operation
- Low self discharge
- Flame retardant ABS, UL94V-0 / 92-2
- International Standard, JIS and DIN
- High Reliability and Good Quality
- Deep Discharge Recovery
- High Power Density


Effect of Temperature on Long term Float Life

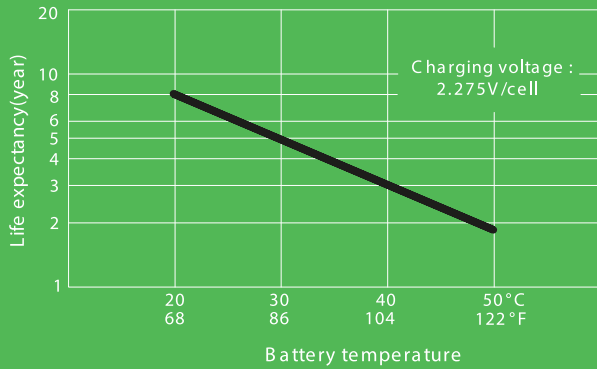


Discharge Time VS. Discharge Current (25°C)

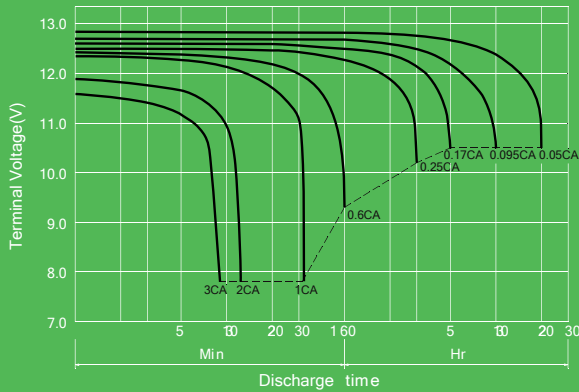

Battery Charging Characteristics

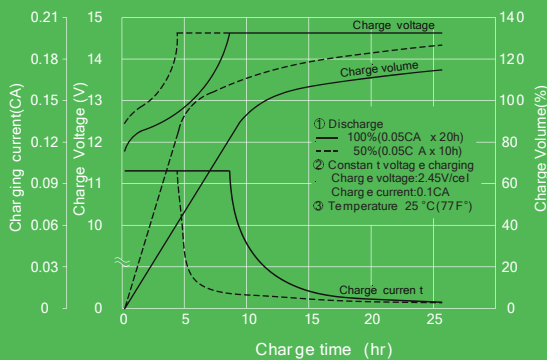

Charging voltage and temperature

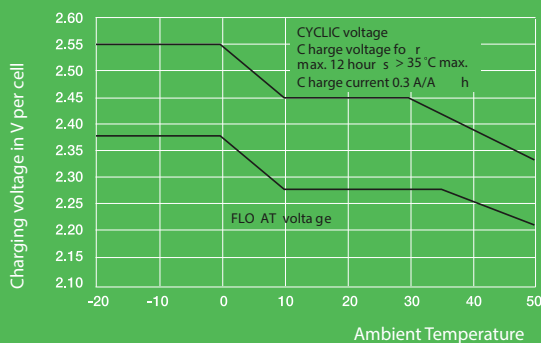

Models available

Model pbq	Capacity in Ah	Dimensions (±2mm) (LxWxH1/H2)	Weight
pbq L 7-12	7	151x65x100mm	2.5 kg
pbq L 9-12	9	151x65x102mm	2.7 kg
pbq L 12-12	12	151x98x101mm	3.7 kg
pbq L 17-12	17	181x77x167mm	5.5 kg
pbq L 28-12	28	166x175x125mm	9 kg
pbq L 33-12	33	195x130x168mm	10.2 kg
pbq L 40-12	40	198x166x170mm	14.7 kg
pbq L 55-12	55	239x132x210mm	17.3 kg
pbq L 65-12	65	350x167x179mm	23.4 kg
pbq L 80-12	80	350x167x179mm	22.5 kg
pbq L 100-12	100	330x171x220mm	32 kg
pbq L 120-12	120	410x176x227mm	38 kg
pbq L 150-12	150	482x170x240mm	47 kg
pbq L 200-12	200	522x238x223mm	65 kg
pbq L 230-12	230	520x269x208mm	72.6 kg



Certificates



Features

- Absorbent Glassmat Technology
- Low self discharge
- Classified as non-spillable and Non Dangerous goods by IATA, FAA, ADR, IMDG
- Can be discharged or stored in any position without leakage
- Cannot be charged while the terminal is downward.

CONSULTING DISTRIBUTOR

**POHL** POHL Electronic GmbH  
 Eduard-Maurer-Straße 11a • 16761 Hennigsdorf  
 Tel. +49 3302 81893-0 • Fax +49 3302 81893-99  
 www.pohl-electronic.de • info@pohl-electronic.de