

mLCM

CONSULTING DISTRIBUTOR

 **POHL** **POHL E**
Eduard-Maurer-Str.
Tel. +49 3302 818
www.pohl-electro.com

POHL Electronic GmbH
Eduard-Maurer-Straße 11a • 16761 Hennigsdorf
Tel. +49 3302 81893-0 • Fax +49 3302 81893-99
www.pohl-electronic.de • info@pohl-electronic.de



BC1602AI

Feature


1. Multi-interface : I2C/SPI/RS232(USB optional)
2. COB with metal frame
3. 5x7 dots with cursor
4. Built-in controller ST7066 or equivalent
5. 1/16 duty cycle
6. Backlight : LED EDGE/ARRAY
7. 5V single power supply
8. Contrast/Backlight adjustment by program

Mechanical Data

Item	Standard Value	Unit
Module Dimension	87.5 x 36.0	mm
Viewing Area	66.0 x 16.0	mm
Dot Size	0.56 x 0.65	mm
Character Size	2.96 x 5.56	mm

Pin Assignment


Pin	Symbol	Function
1	TX	RS-232 level output port.
2	RX	RS-232 level input port
3	VSS	Ground.
4	VDD	System power supply input.
5	SDA	I2C: Data Input/output for the I ² C SPI: Serial data Input
6	SCL	I2C: Clock Input for the I ² C SPI: Serial clock Input
7	SDO	SPI: Serial data Output
8	/CS	SPI: Chip select

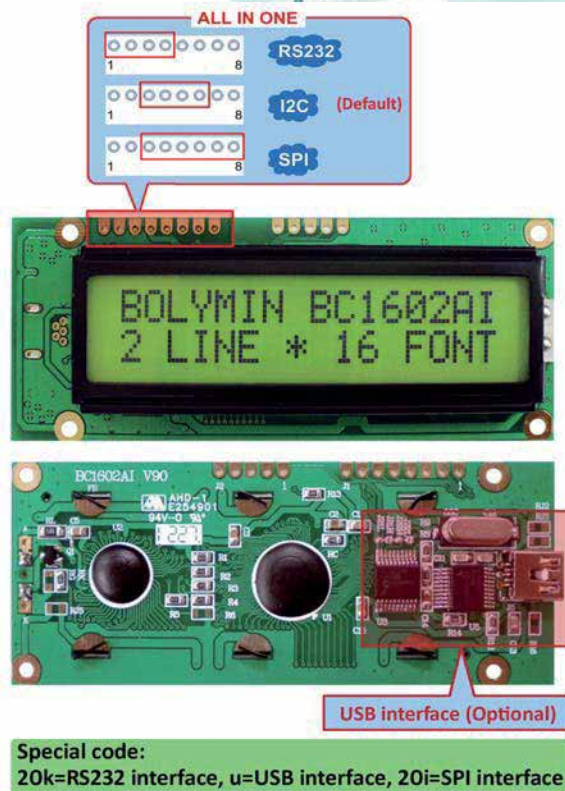

Electronic Characteristics

Item	Symbol	Condition	Value	Unit
Input Voltage	Vdd	Vdd = +5V	5.0(Typ.)	V
Supply Current with Backlight	Idd	Vdd = +5V	130(Max.)	mA

Dimension

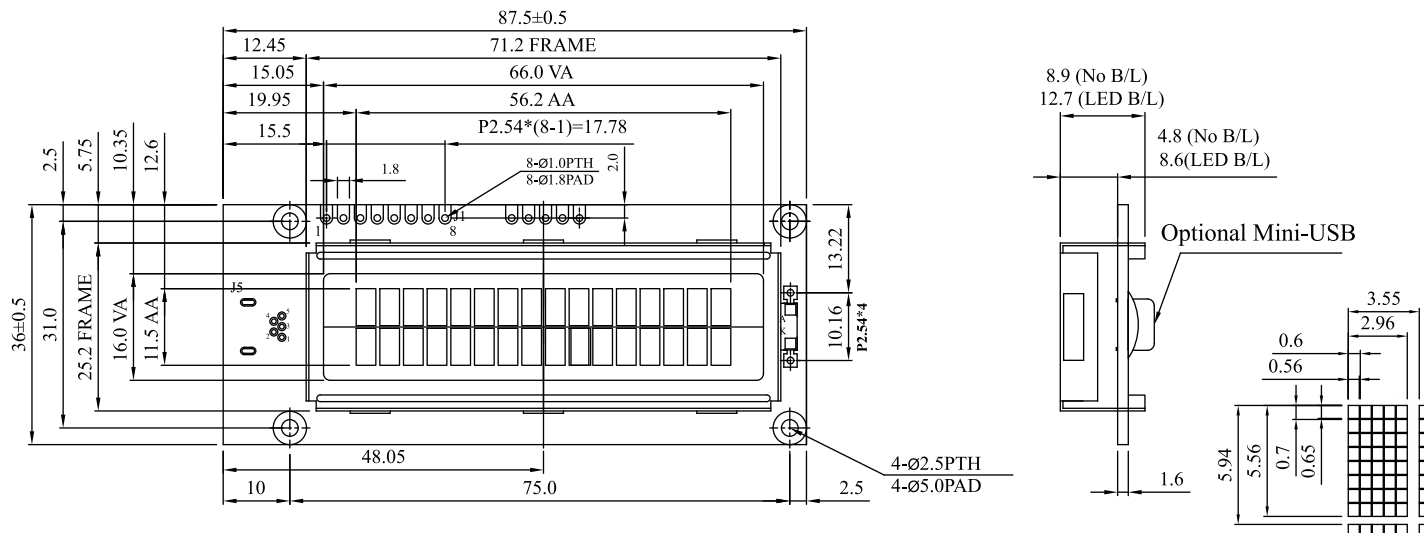

DOT SIZE
SCALE 3/1