


mLCM

CONSULTING DISTRIBUTOR



**POHL**

POHL Electronic GmbH  
 Eduard-Maurer-Straße 11a · 16761 Hennigsdorf  
 Tel. +49 3302 81893-0 · Fax +49 3302 81893-99  
 www.pohl-electronic.de · info@pohl-electronic.de

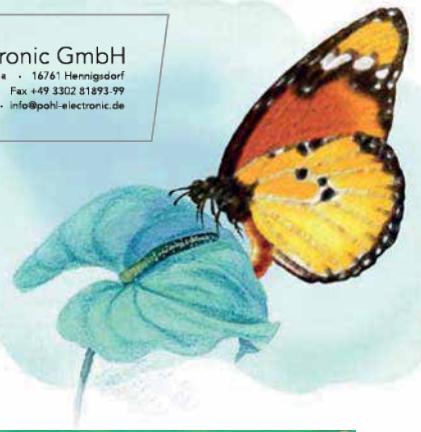


# BC2002BI

## Feature

1. Multi-interface : RS232/SPI/I2C(USB optional)
2. COB with metal frame
3. 5x7 dots with cursor
4. Built-in controller ST7066 or equivalent
5. 1/16 duty cycle
6. Backlight : LED EDGE/ARRAY
7. 5V single power supply
8. Contrast/Backlight adjustment by program



USB Interface(optional)

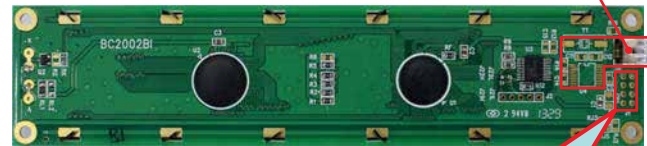

## Mechanical Data

Item	Standard Value	Unit
Module Dimension	180.0 x 40.0	mm
Viewing Area	149.0 x 23.0	mm
Dot Size	1.12 x 1.12	mm
Character Size	6.0 x 9.66	mm



## Pin Assignment

Pin	Symbol	Function
1	TX	RS-232 level output port.
2	RX	RS-232 level input port
3	VSS	Ground.
4	VDD	System power supply input.
5	SDA	I <sup>2</sup> C: Data Input/output for the I <sup>2</sup> C SPI: Serial data Input
6	SCL	I <sup>2</sup> C: Clock Input for the I <sup>2</sup> C SPI: Serial clock Input
7	SDO	SPI: Serial data Output
8	/CS	SPI: Chip select

## Electronic Characteristics

Item	Symbol	Condition	Value	Unit
Input Voltage	Vdd	Vdd = +5V	5.0(Typ.)	V
Supply Current with Backlight	Idd	Vdd = +5V	380(Max.) ,Yellow green 50(Max.),white	mA

## Dimension

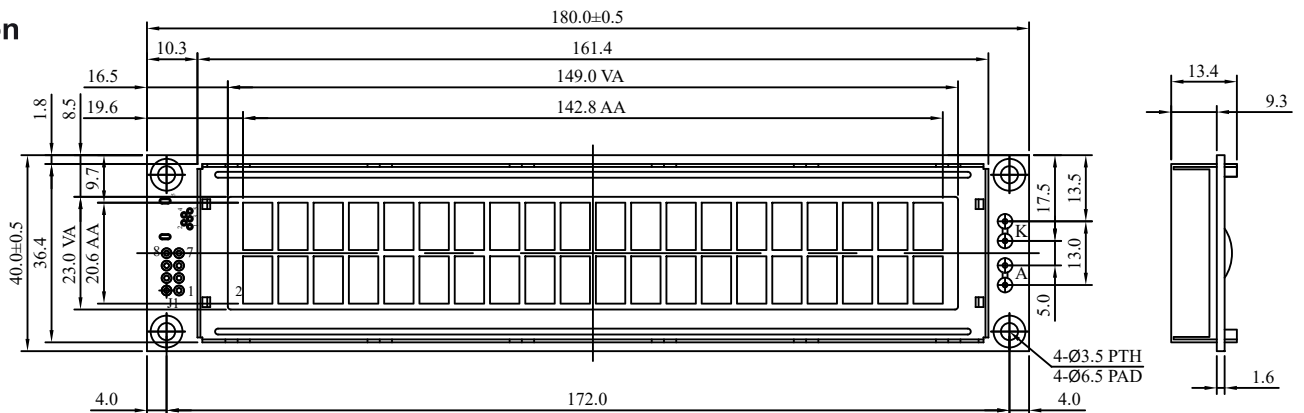

2

