


New
BK-10V10T

Old
(HHR-10V10T)

Infrastructure type



Dimensions

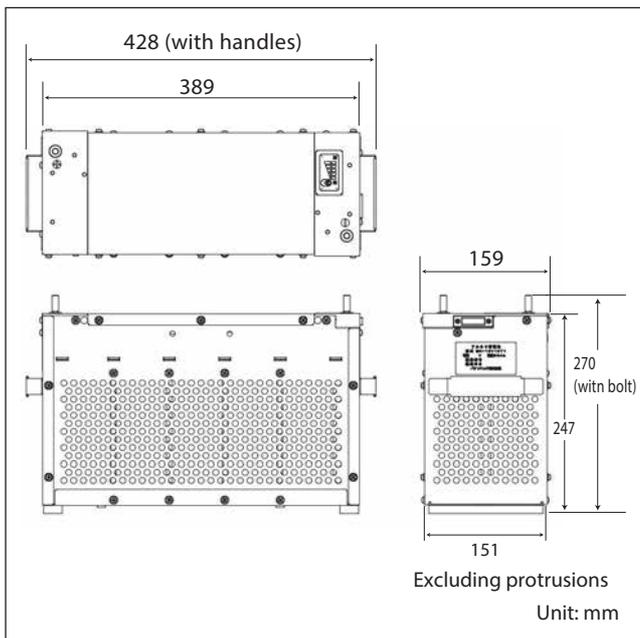

Main Specifications


Rated(battery pack)	12 V / 90 Ah
Discharge current	100 A
Operating temperature range	-20 to 60
Dimensions(mm)	W: 428 × D: 159 × H: 270
Battery cell	BK-10V1S × 10
Volume	18.4 ℓ
Mass	23 kg
Display function	Remaining capacity

*Specifications subject to change.
*Handle, excluding protrusions.



Exclusive battery charger

*Under battery charger development

Typical charge characteristics

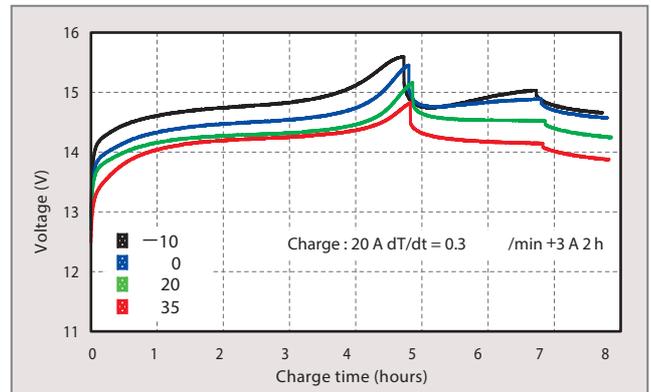

Typical discharge characteristics

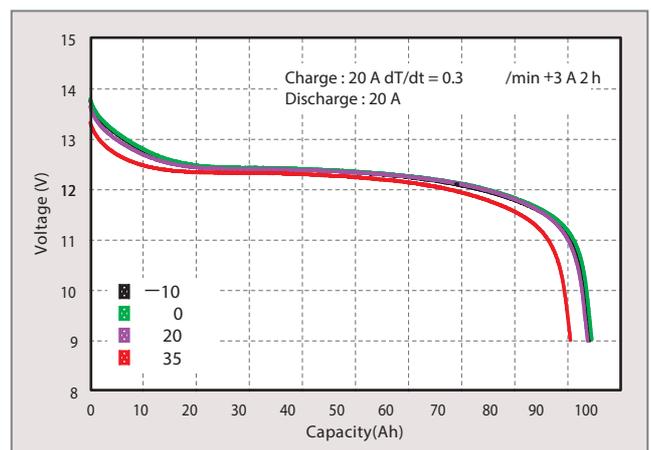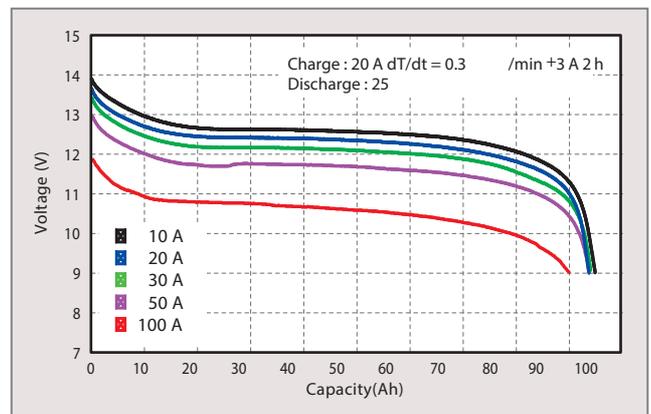

CONSULTING DISTRIBUTOR

POHL POHL Electronic GmbH
 Eduard-Mauren-Straße 11a • 16761 Hennigsdorf
 Tel. +49 3302 81893-0 • Fax +49 3302 81893-99
 www.pohl-electronic.de • info@pohl-electronic.de

Battery performance and cycle life are strongly affected by how they are used. In order to maximize battery safety, please consult Panasonic when determining charge/discharge specs, warning label contents and unit design.

*The data in this document are for descriptive purposes only and are not intended to make or imply any guarantee or warranty.