

BP320240F

Feature

1. FSTN LCD, TAB IC and PCB package
2. No controller, RA8835 recommended
3. +3V ~ +5V single power supply
with built-in positive voltage for LCD driving
4. 1/240 duty cycle
5. Option: LED/white
6. Option: Touch panel & touch panel controller

Mechanical Data

Item	Standard Value	Unit
Module Dimension	85.0 x 99.3	mm
Viewing Area	62.0 x 81.8	mm
Dot Size	0.225 x 0.225	mm
Dot Pitch	0.24 x 0.24	mm

Pin Assignment

Pin	Symbol	Function
1~4	DB0-3	Data Bus
5	/Dispoff	L:display off
6	FLM	Start line signal
7	M	Alternate signal
8	LP	Data latch clock
9	CP	Data Shift clock
10	Vdd	Power supply (+3V ~ +5V)
11	Vss	Power supply (GND)
12	EL-on	H:EL on
13	Vadj	Contrast Adjustment
14	/RST	Reset signal
15	SK*/X1**	Serial clock/touch panel left signal (X axis)
16	D0*/X2**	Data output/touch panel right signal (X axis)
17	D1*/Y1**	Data input/touch panel upper signal (Y axis)
18	CS*/Y2**	Chip select/touch panel lower signal (Y axis)
19	INT	Interrupt
20,21	LED A,K	Power supply for LED B/L
22,24	NC	



(Options : Frame without ears)



Electronic Characteristics

Item	Symbol	Condition	Typical Value	Unit
Input Voltage	Vdd		5	V
Supply Current	Idd	Vdd = +5V	10	mA
LCD Driving Voltage	Vlcd	Vadj - Vss	0.5	V
LED Supply Current	I led	Vled= +3.3V	55	mA


CONSULTING DISTRIBUTOR



POHL

POHL Electronic GmbH
 Eduard-Mauer-Str. 11a · 16761 Hennigsdorf
 Tel. +49 3302 81893-0 · Fax +49 3302 81893-99
 www.pohl-electronic.de · info@pohl-electronic.de

Dimension

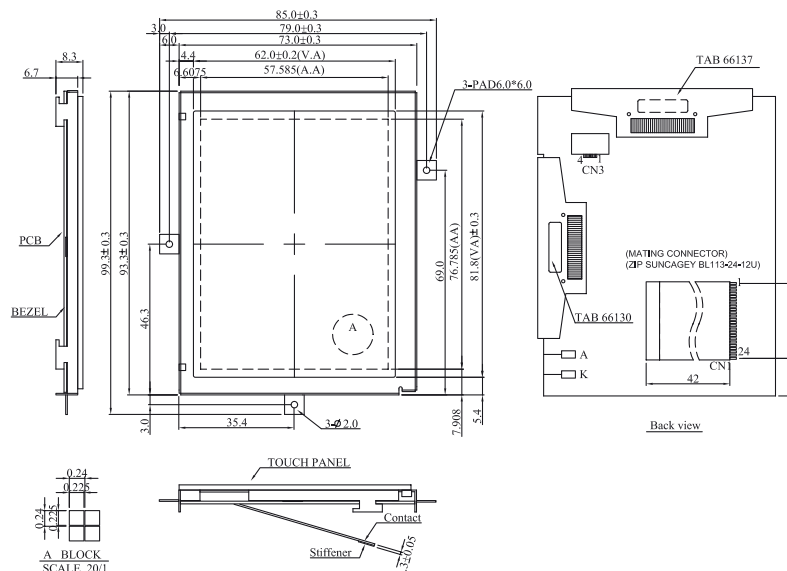

The non-specified tolerance of dimension is ±0.3 mm .