


LR6AD POWERLINE

IEC DIMENSIONS (MM)


POHL

CONSULTING DISTRIBUTOR

POHL Electronic GmbH
Eduard-Maurer-Straße 11a • 16761 Hennigsdorf
Tel. +49 3302 81893-0 • Fax +49 3302 81893-99
www.pohl-electronic.de • info@pohl-electronic.de

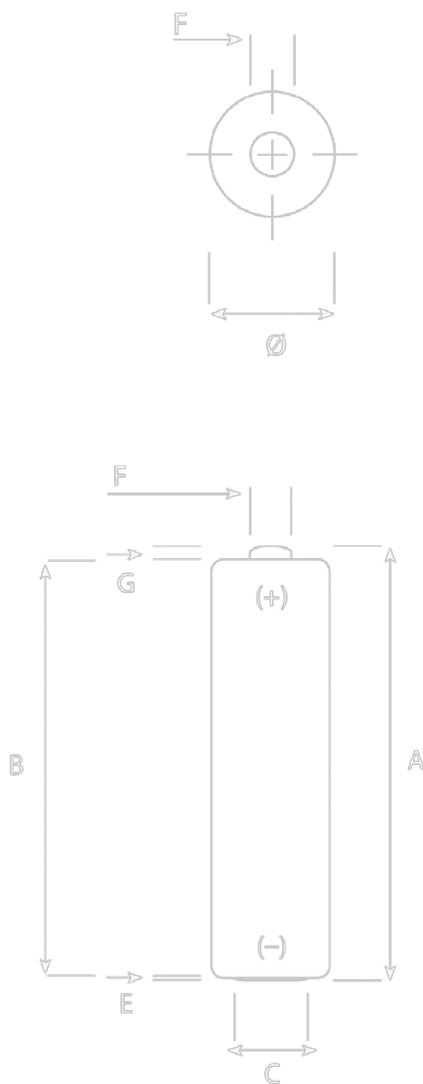









Dimensions	max. (mm)	min. (mm)
A	50.5	
B		49.2
C		7.0
E	0.5	
F	5.5	
G		1.0
Ø	14.5	13.5

SPECIFICATIONS


Name	LR6 / M / AA / AM3 / MIGNON / MN1500 / 15A / 15AC
Made in	Belgium
Type	Alkaline foil
Nominal voltage	1.5V
Electrolyte	Potassium Hydroxide
Average weight	23.3g
Storage temperature range	+10°C ~ +25°C
Operating temperature range	-20°C ~ +45°C
Average impedance	approx. 105m Ω @ 1kHz AC
Heavy metals	No added mercury (Hg), Cadmium (Cd) or Lead (Pb)
Compliant with	IEC 60086 non dangerous goods regulation Nordic Ecolabel (White Swan) version 3.7 EC directive 91/157EC, 98/101EC, 2006/66/EC
Recommended cut-off voltage	0.8V per cell

LR6AD POWERLINE

TYPICAL DISCHARGE VALUES

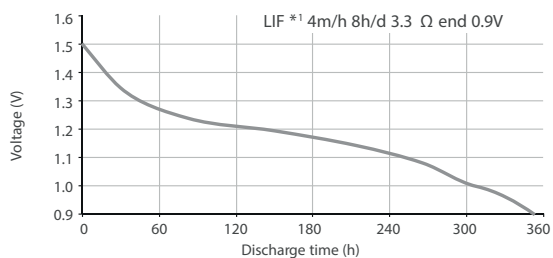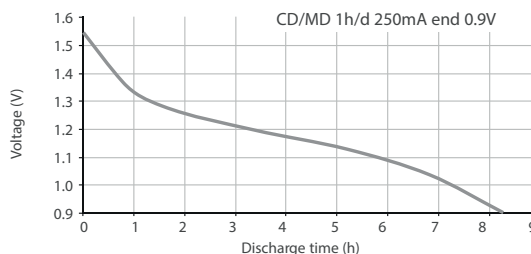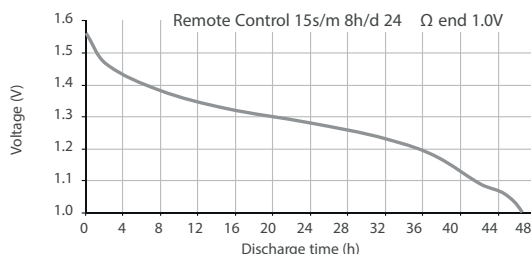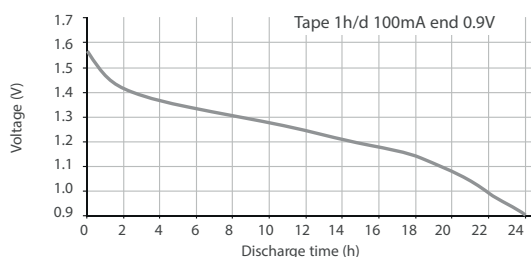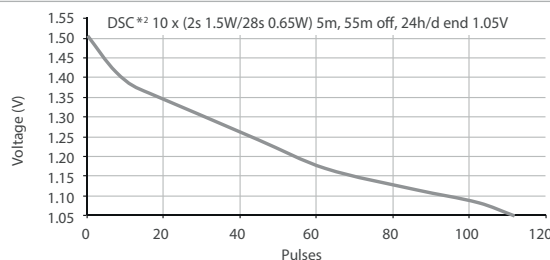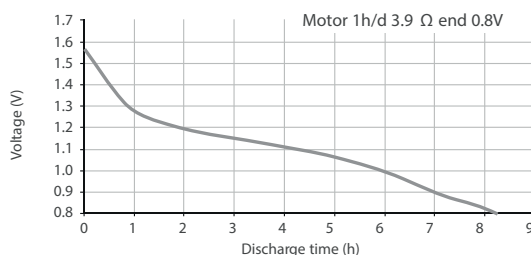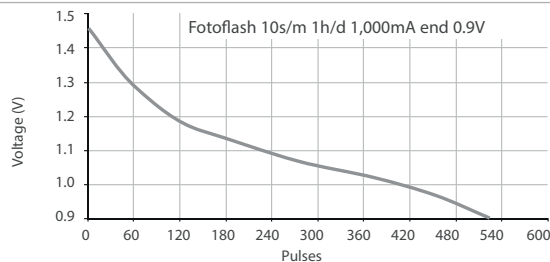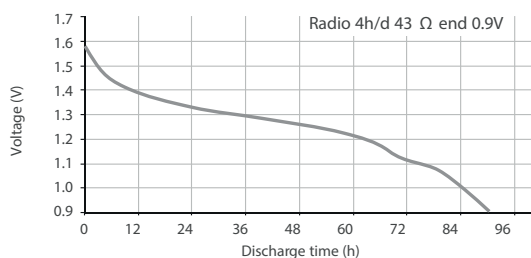


DISCHARGE TEMPERATURE CHARACTERISTICS

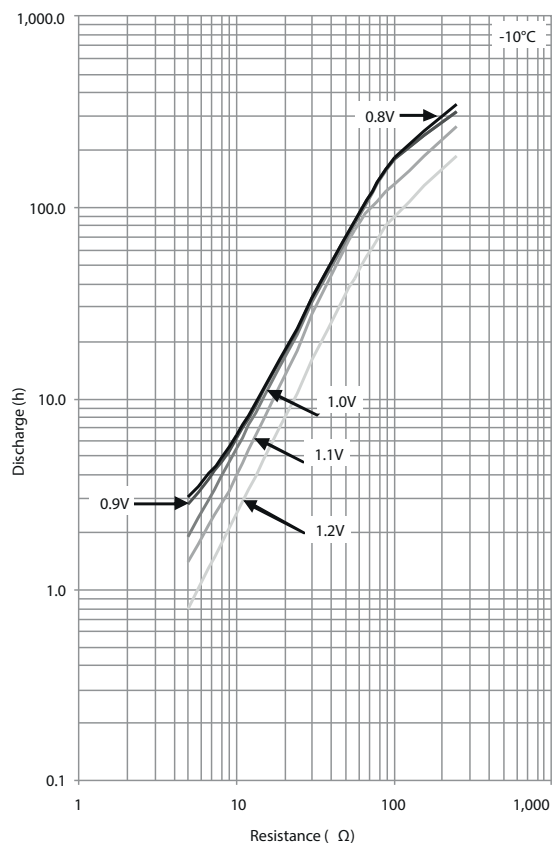

*1 Digital still camera *2 Light intention flashlight

LR6AD POWERLINE

DISCHARGE TEMPERATURE CHARACTERISTICS

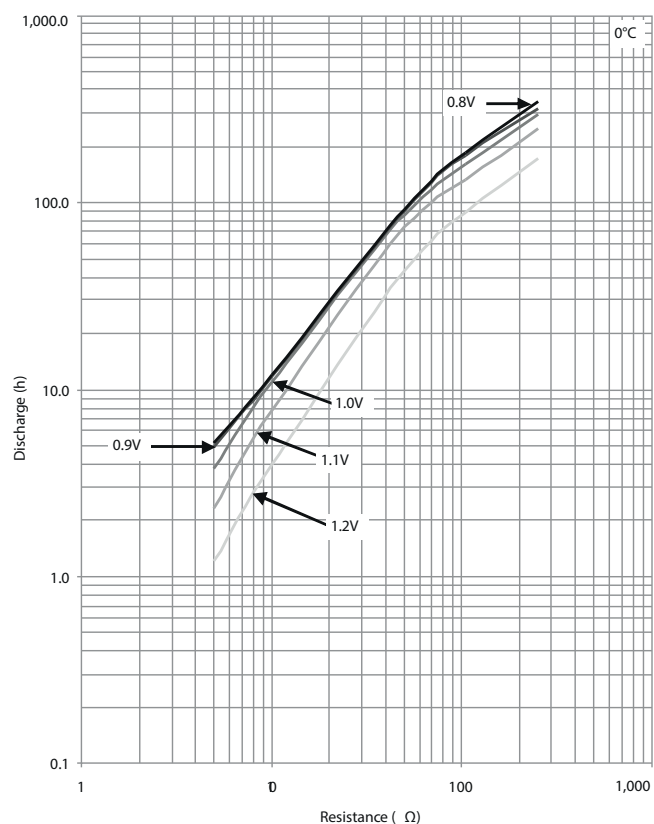

CONSULTING DISTRIBUTOR



POHL

POHL Electronic GmbH
Eduard-Maurel-Straße 11a • 16761 Hennigsdorf
Tel. +49 3302 81893-0 • Fax +49 3302 81893-99
www.pohl-electronic.de • info@pohl-electronic.de

