



ML-421

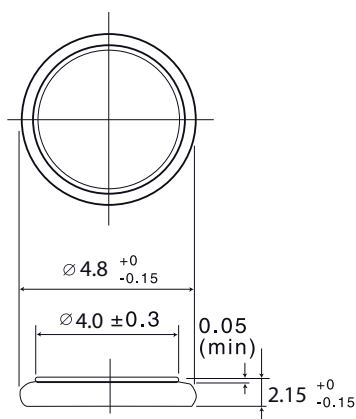


SPECIFICATIONS

Name	ML-421
Nominal voltage (V)	3
Nominal capacity (mAh)	2.3
Continuous drain (mA)	0.005
Operating temperature (°C)	-20 to +60
Weight (g)	0.11

DISCHARGE CHARACTERISTICS

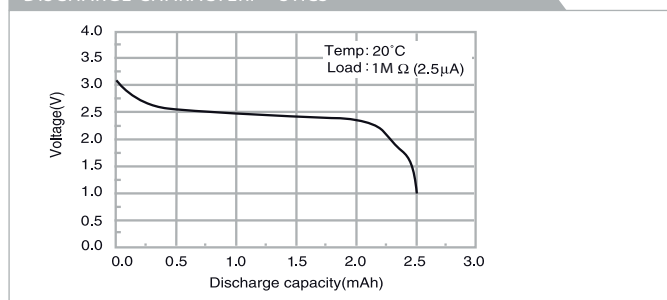

CHARGE VOLTAGE VS. DISCHARGE CAPACITY

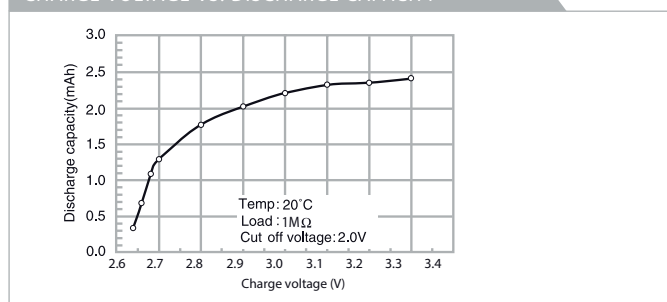


CONSULTING DISTRIBUTOR

**POHL**


POHL Electronic GmbH
 Eduard-Maurer-Straße 11a • 16761 Hennigsdorf
 Tel. +49 3302 81893-0 • Fax +49 3302 81893-99
 www.pohl-electronic.de • info@pohl-electronic.de

ML-614




SPECIFICATIONS	
Name	ML-614
Nominal voltage [V]	3
Nominal capacity [mAh]	3.4
Continuous drain [mA]	0.01
Operating temperature [°C]	-20 to +60
Weight [g]	0.16


DISCHARGE CHARACTERISTICS

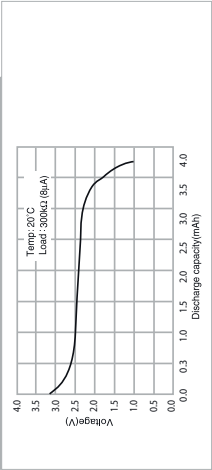

CONSUMPTION CURRENT VS. DURATION TIME

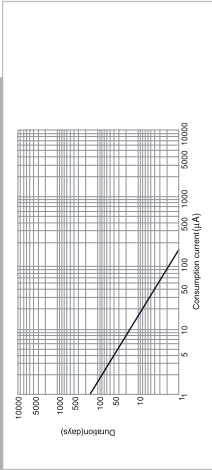


ML-621




SPECIFICATIONS	
Name	ML-621
Nominal voltage [V]	3
Nominal capacity [mAh]	5.0
Continuous drain [mA]	0.01
Operating temperature [°C]	-20 to +60
Weight [g]	0.23


DISCHARGE CHARACTERISTICS

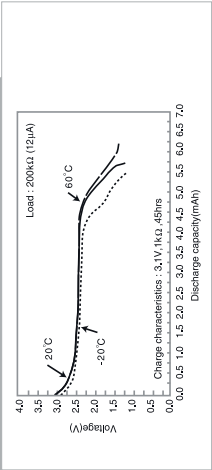


CHARGE CHARACTERISTICS

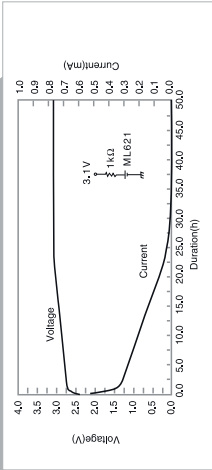

CONSUMPTION CURRENT VS. DURATION TIME

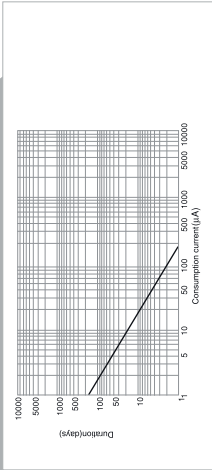


ML-920




SPECIFICATIONS	
Name	ML-920
Nominal voltage [V]	3
Nominal capacity [mAh]	11.0
Continuous drain [mA]	0.03
Operating temperature [°C]	-20 to +60
Weight [g]	0.4


DISCHARGE CHARACTERISTICS

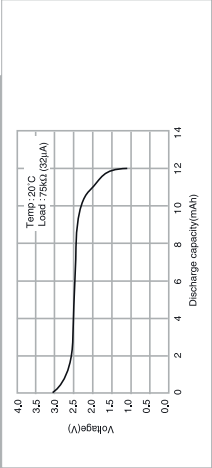

CONSUMPTION CURRENT VS. DURATION TIME

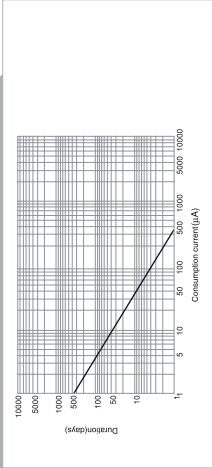


ML-1220




SPECIFICATIONS	
Name	ML-1220
Nominal voltage [V]	3
Nominal capacity [mAh]	17.0
Continuous drain [mA]	0.03
Operating temperature [°C]	-20 to +60
Weight [g]	0.8


DISCHARGE CHARACTERISTICS

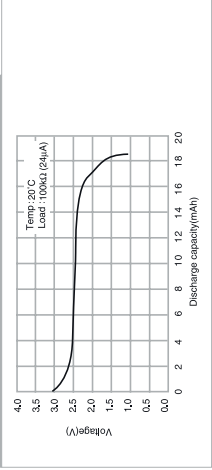



CONSUMPTION CURRENT VS. DURATION TIME

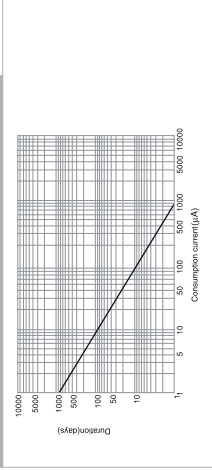

ML-2020

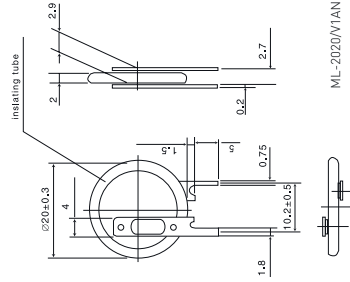

SPECIFICATIONS	
Name	ML-2020
Nominal voltage [V]	3
Nominal capacity [mAh]	45
Continuous drain [mA]	0.12
Operating temperature [°C]	-20 to +40
Weight [g]	2.2

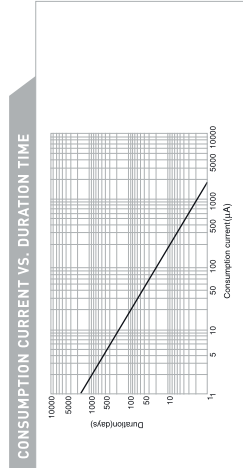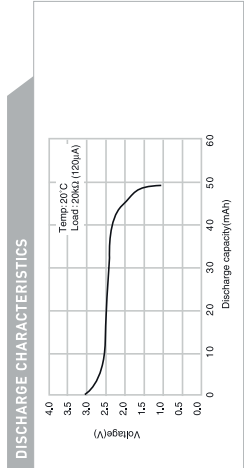



CONSULTING DISTRIBUTOR

POHL Electronic GmbH
Edland-Mauerstraße 11a • 16761 Hennigsdorf
Tel. +49 3302 61675-0 • Fax +49 3302 61675-99
www.pohl-electronic.de • info@pohl-electronic.de