



MT-516

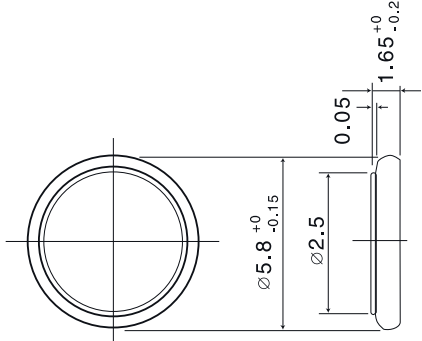


SPECIFICATIONS	
Name	MT-516
Nominal voltage [V]	1.5
Nominal capacity [mAh]	1.8
Continuous drain [mA]	0.04
Operating temperature [°C]	-10 to +60
Weight [g]	0.15


DISCHARGE CHARACTERISTICS

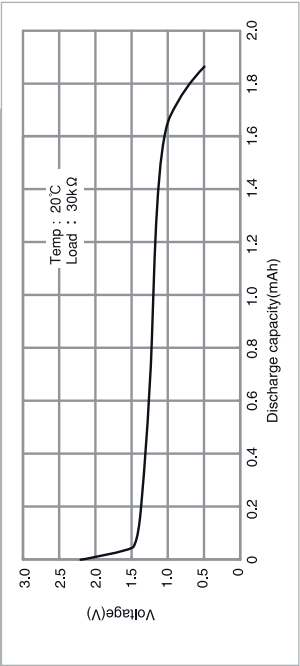

CONSUMPTION CURRENT VS. DURATION TIME

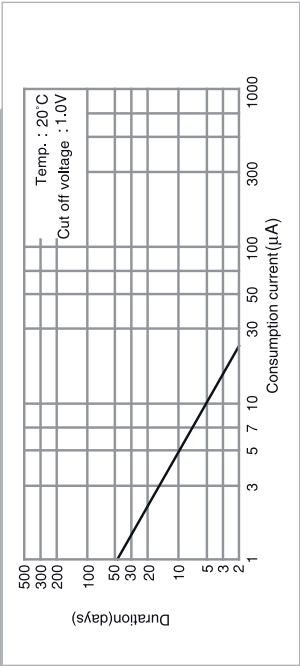


MT-621

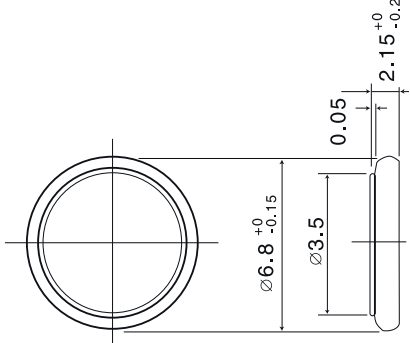


SPECIFICATIONS	
Name	MT-621
Nominal voltage [V]	1.5
Nominal capacity [mAh]	2.5
Continuous drain [mA]	0.04
Operating temperature [°C]	-10 to +60
Weight [g]	0.25


DISCHARGE CHARACTERISTICS

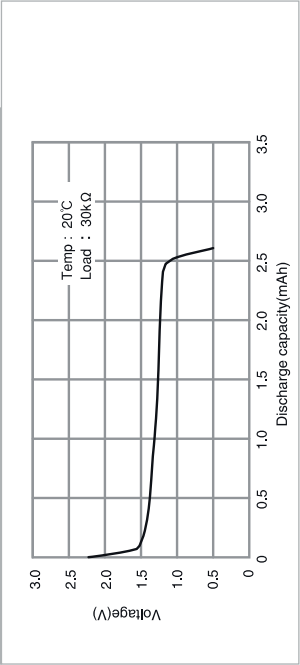

CONSUMPTION CURRENT VS. DURATION TIME

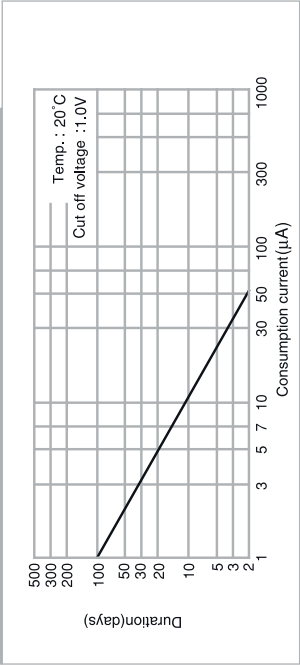


MT-920

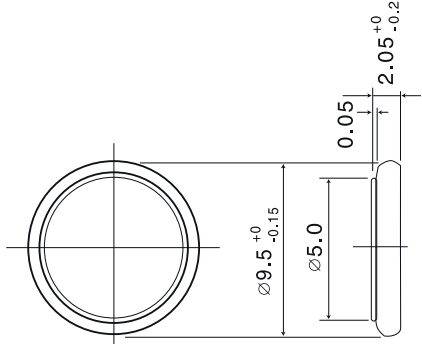


SPECIFICATIONS	
Name	MT-920
Nominal voltage [V]	1.5
Nominal capacity [mAh]	5.0
Continuous drain [mA]	0.04
Operating temperature [°C]	-10 to +60
Weight [g]	0.50


DISCHARGE CHARACTERISTICS

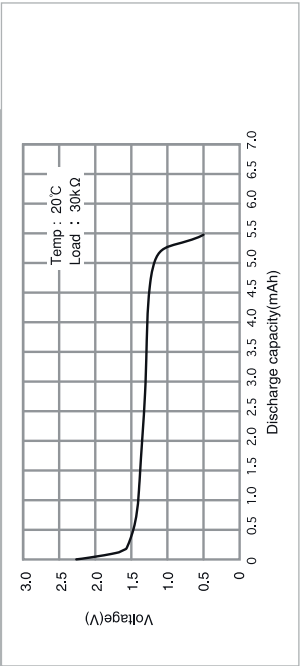

CONSUMPTION CURRENT VS. DURATION TIME

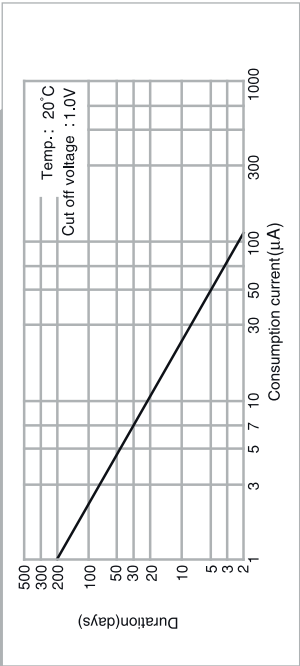

DISCHARGE TEMPERATURE CHARACTERISTICS

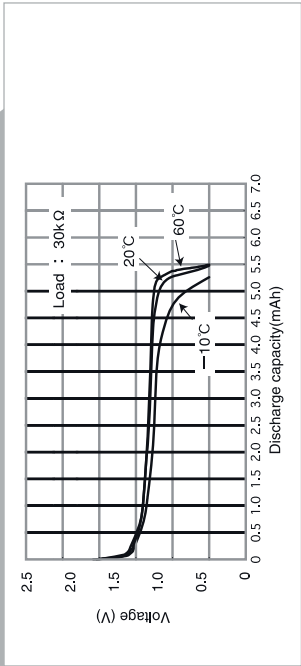



CONSULTING DISTRIBUTOR

POHL
POHL Electronic GmbH
Eduard-Maurer-Strasse 11a • 16761 Hennigsdorf
Tel. +49 3302 81893-0 • Fax +49 3302 81893-99
www.pohl-electronic.de • info@pohl-electronic.de