



Panasonic
ideas for life

Lithium Ion UF553436G

Features & Benefits

- High energy density and voltage
- Long, stable power with a flat discharge voltage
- Ideal for portable communications, portable computing, and robotics.


* At temperatures below 10 °C, charge at a 0.65C rate.

Specifications

Rated capacity ⁽¹⁾	Min. 800mAh
Capacity ⁽²⁾	Min. 800mAh Typ. 830mAh
Nominal voltage	3.7V
Charging	CC-CV, Std. 800mA, 4.20V, 3.0 hrs
Weight (max.)	15.6 g
Temperature	Charge*: 0 to +45°C Discharge: -20 to +60°C Storage: -20 to +50°C
Energy density	Volumetric: 447 Wh/l Gravimetric: 190 Wh/kg


⁽¹⁾ At 20°C ⁽²⁾ At 25°C

Dimensions

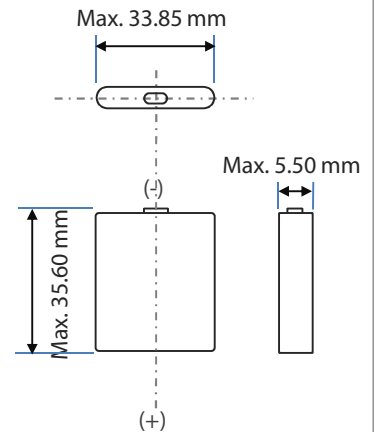


For Reference Only


Charge Characteristics

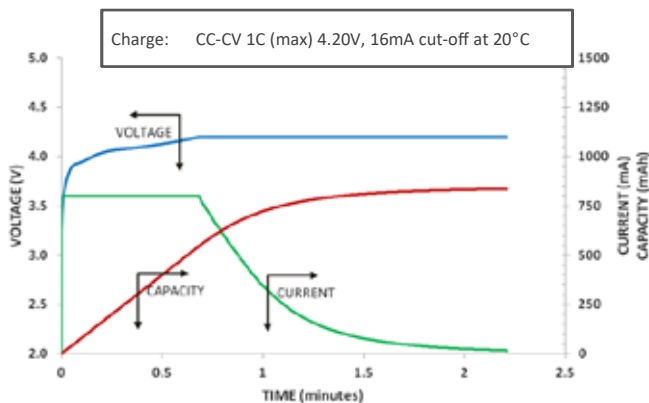


Cycle Life Characteristics

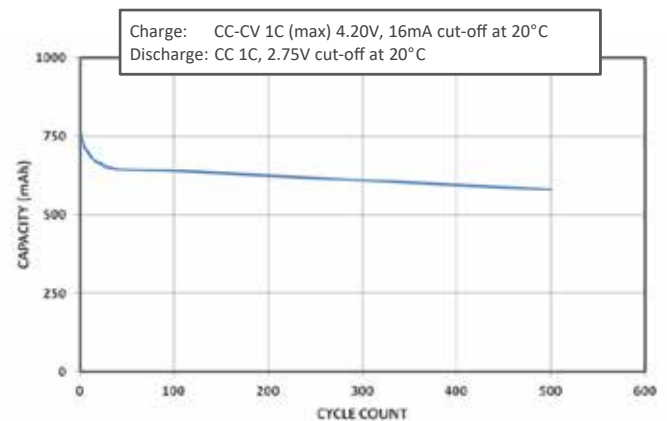

Discharge Characteristics (by temperature)

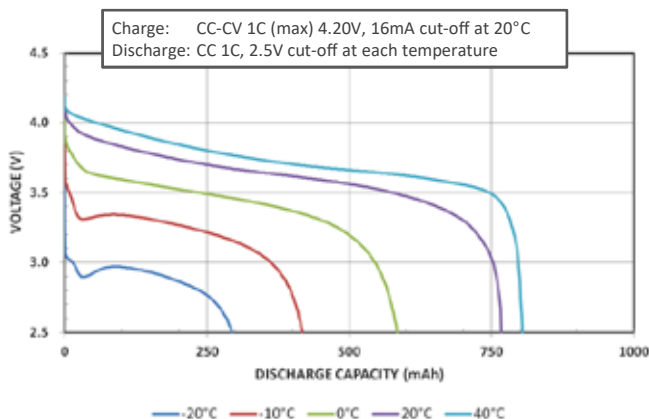

Discharge Characteristics (by rate of discharge)

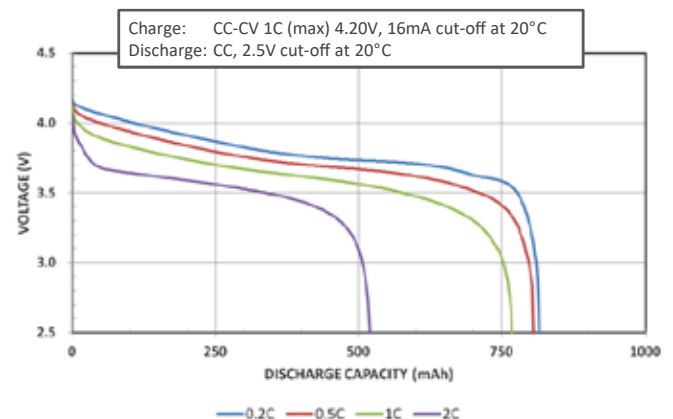

The data in this document is for descriptive purposes only and is not intended to make or imply any guarantee or warranty.