

Image not available

Basic Specifications

Voltage:	12 Volt
Capacity:	20 hour rate: 68Ah 10 hour rate: 65Ah 5 hour rate: 57Ah
Design life:	3-5 years
Appr. dimensions:	350x167x179mm (LxWxH) (±2mm)
Terminal:	M6 insert
Container & lid:	Flame retardant ABS
Internal Resistance:	6mΩ (Fully charged)
Approximate weight:	22kg
Max charge current:	19.5A
Max discharge current:	650A (5 sec.)
Operating temp. range:	-20°C ~ +50°C
Self discharge:	lower than 3% per month

Typical Applications

- Security systems / Emergency lighting
- UPS / Emergency Power
- Household appliances
- Traffic sensors
- Telecommunication
- Garden tools
- Toys

Discharge data in Watts per battery (25°C)

	(V/cell)	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
End Voltage	1.80V	1238	1013	651	419	185	130	77,6	41
	1.75V	1312	1069	676	432	191	134	78,2	41,2
	1.70V	1371	1107	693	441	192	135	78,6	41,5
	1.65V	1430	1149	715	453	194	136	78,9	41,6
	1.60V	1474	1178	729	459	195	137	79	41,7

Discharge data in Amperes (25°C)

	(V/cell)	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
End Voltage	1.80V	115	92,2	58	36,8	15,8	11	6,5	3,41
	1.75V	121	97,4	60,3	37,9	16,3	11,4	6,55	3,44
	1.70V	127	101	61,8	38,7	16,4	11,5	6,58	3,46
	1.65V	132	105	63,7	39,7	16,5	11,5	6,6	3,47
	1.60V	137	107	65	40,3	16,6	11,6	6,62	3,47

General purpose batteries

With a range of well over 50 models, pbq offers one of the widest selections in the battery industry. The batteries are designed with the cost and quality conscious user in mind offering an excellent price/performance ratio. pbq has a full series of 6 and 12 Volt models available for a wide range of applications and intents to keep this range in production for many years to come. These General Purpose batteries have been designed for a functional life of 4-5 years at an operating temperature of 25°C in a standby application.

VdS approved VRLA batteries

The VdS-approved pbq batteries form a special range that has been tested and qualified by the German VdS institute. The concept behind VdS recognition; ensuring tested and certified quality in the products and services being offered in the safety and security markets, is of equally advantageous for user and supplier.


Flame Retardant ABS casing

All VdS models are accomplished in Flame Retardants ABS casing. Due to the right choice of the flame retardant, the batteries remain RoHS Compliant.

CONSULTING DISTRIBUTOR

POHL Electronic GmbH
Eduard-Maurer-Straße 11a • 16761 Hennigsdorf
 Tel. +49 3302 81893-0 • Fax +49 3302 81893-99
 www.pohl-electronic.de • info@pohl-electronic.de


Design Life

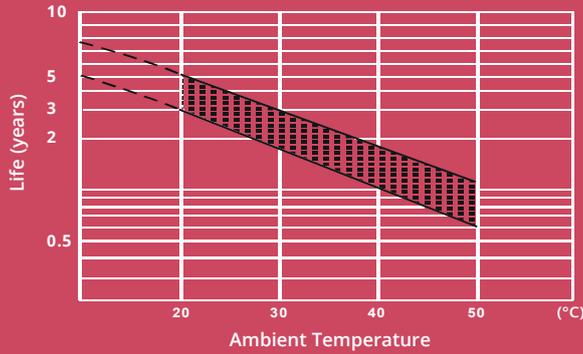


Discharge time VS. discharge current (25C)



Battery Charging Characteristics

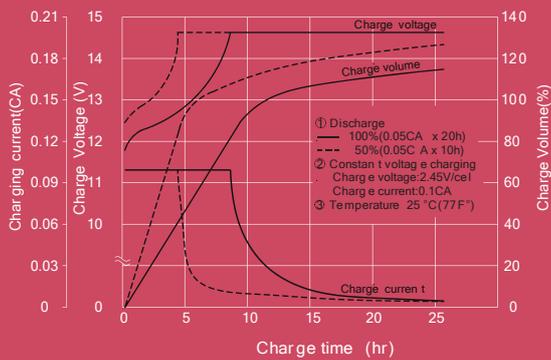

Battery Charging Characteristics

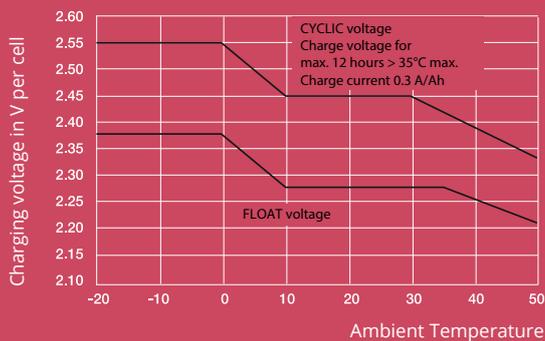

Models available

Model pbq	Capacity in Ah	Dimensions (±2mm) (LxWxH1/H2)	Weight
pbq 3.5-4	3.5	91 x 35 x 64	0.46 kg
pbq 1.2-6	1.2	97 x 24 x 58	0.31 kg
pbq 3.2-6	3.2	134 x 35 x 67	0.71 kg
pbq 3.5-6	3.5	194 x 25 x 56	0.62 kg
pbq 4.5-6	4.5	70 x 47 x 107	0.75 kg
pbq 4.5-6 M	4.5	62 x 58 x 98	0.84 kg
pbq 7-6	7	151 x 34 x 100	1.2 kg
pbq 12-6	12	151 x 50 x 100	1.85 kg
pbq 0.8-12	0.8	96 x 25 x 62	0.4 kg
pbq 1.2-12*	1.2	97 x 43 x 58	0.54 kg
pbq 1.3-12	1.3	97 x 48 x 57	0.63 kg
pbq 2.3-12*	2.3	178 x 35 x 67	0.99 kg
pbq 2.3-12C	2.3	182 x 23 x 61	0.73 kg
pbq 2.6-12	2.6	178 x 34 x 71	0.92 kg
pbq 2.9-12	2.9	79 x 56 x 105	1.05 kg
pbq 3.2-12*	3.2	134 x 67 x 67	1.3 kg
pbq 3.4-12	3.4	134 x 67 x 67	1.3 kg
pbq 4-12	4	195 x 47 x 76	1.58 kg
pbq 5.2-12	5.2	90 x 70 x 107	1.65 kg
pbq 7-12*	7	151 x 65 x 102	2.2 kg
pbq 7-12L*	7	151 x 65 x 102	2.2 kg
pbq 12-12*	12	151 x 98 x 101	3.7 kg
pbq 18-12*	18	181 x 77 x 167	5.5 kg
pbq 26-12*	26	165 x 176 x 127	8.4 kg
pbq 28-12 T2	28	165 x 125 x 175	8.6 kg
pbq 40-12*	40	197 x 165 x 170	13.5 kg
pbq 65-12*	65	350 x 167 x 186	22 kg

* VdS models

Certificates



Features

- Absorbent Glassmat Technology
- Low self discharge
- Classified as non-spillable and Non Dangerous goods by IATA, FAA, ADR, IMDG
- Can be discharged or stored in any position without leakage
- Cannot be charged while the terminal is downward.

CONSULTING DISTRIBUTOR



POHL

POHL Electronic GmbH
Eduard-Mauren-Straße 11a • 16761 Hennigsdorf
Tel. +49 3302 81893-0 • Fax +49 3302 81893-99
www.pohl-electronic.de • info@pohl-electronic.de